

2024 Products

Index

Concealed - LED Strips

LED Strip Low Output	13
LED Strip High Efficiency	15
LED Strip Ultra High Efficiency	17
LED Strip High Efficiency IP67	19
LED Strip Full Spectrum	21
LED Strip High Output	23
LED Strip RGBW 2700K	25
LED Strip RGBW 3000K IP65	27
LED Strip Tunable White 2700-6500K	29
LED Strip COB RGB	31
LED Strip COB	33
LED Strip CSP RGBW	35
LED Strip Single Color IP68	37
LED Strip RGBW IP68	39

Concealed - DiGi LED Strips

DiGi LED Strip RGB 16mm 24V	43
DiGi LED Strip RGB 16mm 12V	45
DiGi LED Strip RGB 24mm 12V	47
DiGi LED Strip RGB 38mm 12V	49
DiGi LED Strip RGB 83mm 24V	51
DiGi LED Strip RGBW 100mm 24V	53
DiGi LED Strip Amber Drift 16mm 12V	55
DiGi LED Strip 3000K IP68	57
DiGi LED Strip RGBW IP68	59

Concealed - Panels

DiGi FlexSheet	63
DiGi Evenlight Panel	65

Channel

Aluminum Profile High	69
Aluminum Profile Low	71
Aluminum Profile Half Round	73
Aluminum Profile 3535	75
Aluminum Profile Corner	77
Aluminum Profile Mini	79
Aluminum Profile Plaster	81

Direct View - DiGi Linears

DiGi Linear D-Serie	85
DiGi Linear E-Serie	87
DiGi Linear V-Serie	89

Direct View - Dots

DiGi Module XT3	93
DiGi Module XT6	95
DiGi Module E3S/E6S/E12S	97
DiGi Mesh	99

Direct View - Neonflex

Neonflex Side Bend	103
Neonflex Top Bend	105
DiGi Neonflex Side Bend	107
DiGi Neonflex Top Bend	109

Projectors & Linears - Linears

Linear Soft Line	113
Linear Window	115
Linear Flex	117
Linear G18	119
Linear G24	121
Linear G36	123
Linear G54	125
Linear G100	127
Linear Inground	129
Linear Inground Flex	131
Linear Flex Silicon	133
DiGi Linear Flex Silicon	135

Projectors & Linears - Beams

Beam F12	139
Beam F36	141
Beam F54	143
Beam F72	145
Beam F120	147
Beam F250	149

About Us

We are OneEightyOne



Nice to meet you!

OneEightyOne is a dynamic LED lighting company. We dare to say that we are one of the most creative, capable and reliable partners in the industry.

It is our mission to push the boundaries of what lighting can do. With our creative customizations, plug & play solutions and our extensive range of smart LED products, we always offer a unique light experience.

The name 'OneEightyOne' honors the elusive light colour 181 which Stefan used at parties. Ironically, this blue-purple is one of the hardest colors to create using LED light...



Stefan Verhoef

Founder, Chief of Innovation

CIO Stefan Verhoef was 11 years old when he started to boost birthday parties and school events with his 'disco set'. As a teenager, Stefan pumped up beach parties and other festivities with more advanced sound and light systems.

Around 2005, when LED light appeared on the scene, he immediately saw the infinite possibilities and opportunities. He started combining LED with the operating systems he had already developed himself, lifting LED lighting to a new level.

Stefan technically executed the light designs for the hottest clubs, like Sinners and Club Air. He took the night and light experience beyond expectations. Lighting projects for offices and retail outlets followed soon. Before he knew it, Stefan was leading his new company. A magnet for smart lighting fanatics who wanted to work in the front line of LED lighting.

OneEightyOne is based in Amsterdam, but also holds offices in Dubai and Hong Kong.



Value Added Services

Pre Order	After Confirmation	After Delivery
✓ Renders ✓ Solution design ✓ Detailed product info ✓ Dialux calculations	✓ Site inspection ✓ Engineering ✓ Wire plans ✓ Pre assembly ✓ System configuration ✓ Providing mockup ✓ Bi weekly update meeting ✓ Project supervision	✓ Support on site ✓ Programming ✓ Testing & commissioning ✓ Content ✓ Maintenance plans

Project
Support

Facts

Markets

- ✓ Architectural
- ✓ Entertainment
- ✓ Hospitality
- ✓ Offices
- ✓ Retail

Focus

- ✓ Dynamic Lighting
- ✓ Facade Lighting
- ✓ Controls
- ✓ Custom Projects



Established

- ✓ 2005

Offices

- ✓ Amsterdam
- ✓ Dubai
- ✓ Hong Kong

Employees


- ✓ 50+ Highly passionate light minded people.
- ✓ Experienced sales engineers, developers, assembly and other staff members




Lightly obsessed
with light

Product Info

All our products come with detailed product information. Scan the QR tags on the product pages, it will direct you to the product page on our website where you find all datasheets. After login you can download further documentation like wire plans and many more!

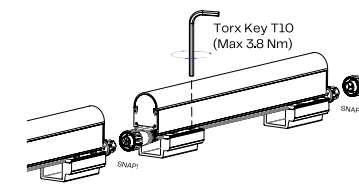


For waterproof connection make sure that the last fixture has the end-cap connector fixed to the last output connector



When the fixture is installed and cables are connected between the fixtures the cable guide can be placed to make sure the cable will not make any unnecessary movement



Minimum of 4 mm and maximum of 10 mm spacing between fixtures to allow thermal expansion

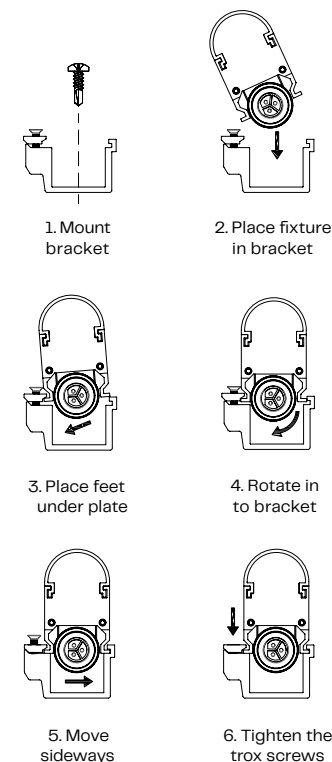

With our creative customizations, easily applicable plug & play solutions and our extensive range of selected and self-developed smart LED products, we always offer a unique light experience!

10

Concealed

131

Static Flex





181




Scan for full info

LED Strip Low Output


Key Specs	2700K	4000K
Power Consumption (W/m)	4,8	4,8
LED quantity (per meter)	70	70
Cutting interval (mm)	100	100
Lumens efficacy (lm/W)	100	110




Color Range




Beam Angle



Specifications



Dimensions (in mm)

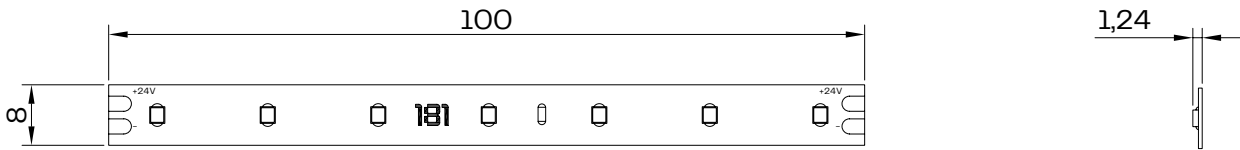

Related Items More available



Profiles

- Aluminum Plaster Profile
- Aluminum Profile Black
- Aluminum Profile Half Round



PWM Driver

- LM 75 24 G1A2
- LM 75 24 G1D2
- LM 75 24 G1T2



Power Supply

- Meanwell HLG 240 24
- Meanwell RSP 200 24
- Meanwell LPV 100 24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181



Scan for full info

LED Strip High Efficiency


Key Specs	2700K	3000K	4000K	6500K
Power Consumption (W/m)	9,6	9,6	9,6	9,6
LED quantity (per meter)	160	160	160	160
Cutting interval (mm)	50	50	50	50
Lumens efficacy (lm/W)	150	150	160	170




Color Range




Beam Angle



Specifications

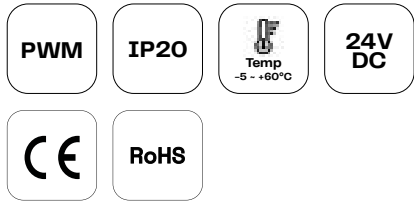

Dimensions (in mm)

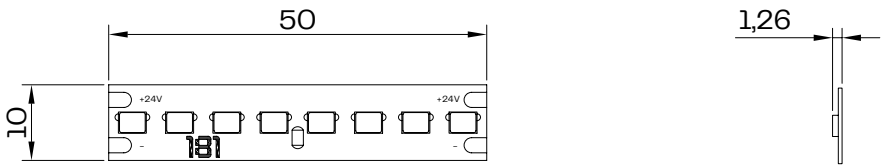

Related Items More available



Profiles

- Aluminum Plaster Profile
- Aluminum Profile Black
- Aluminum Profile Half Round



PWM Driver

- LM 75 24 G1D2
- LM 75 24 G1T2



Power Supply

- Meanwell HLG 240 24
- Meanwell RSP 200 24
- Meanwell LPV 100 24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181




Scan for full info

LED Strip Ultra High Efficiency


Key Specs	3000K	4000K
Power Consumption (W/m)	9,6	9,6
LED quantity (per meter)	160	160
Cutting interval (mm)	50	50
Lumens efficacy (lm/W)	150	160




Color Range




Beam Angle



Specifications

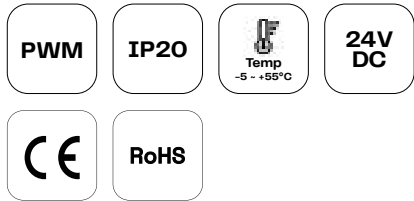

Dimensions (in mm)

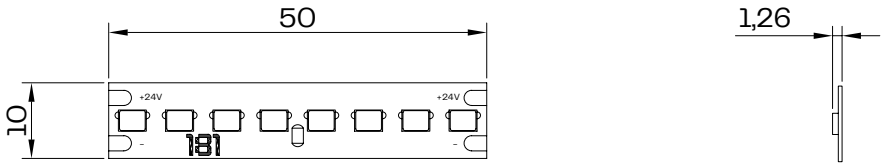

Related Items More available



Profiles

- Aluminum Plaster Profile
- Aluminum Profile Black
- Aluminum Profile Half Round



PWM Driver

- LM 75 24 G1D2
- LM 75 24 G1T2



Power Supply

- Meanwell HLG 240 24
- Meanwell RSP 200 24
- Meanwell LPV 100 24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181




Scan for full info

LED Strip High Efficiency IP67


Key Specs	3000K	4000K
Power Consumption (W/m)	9,6	9,6
LED quantity (per meter)	160	160
Cutting interval (mm)	50	50
Lumens efficacy (lm/W)	150	160




Color Range




Beam Angle



Specifications



Dimensions (in mm)

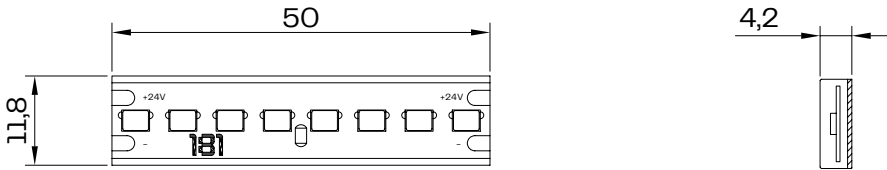

Related Items More available



Profiles

- Aluminum Plaster Profile
- Aluminum Profile Black
- Aluminum Profile Half Round




PWM Driver

- LM 75 24 G1T2



Power Supply

- Meanwell HLG 240 24
- Meanwell RSP 200 24
- Meanwell LPV 100 24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181



Scan for full info

LED Strip Full Spectrum

Key Specs


Power Consumption (W/m)	9,6	19,2
LED quantity (per meter)	160	160
Cutting interval (mm)	50	50
Lumens efficacy (lm/W)	120	110
CRI	≥95	≥95



Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

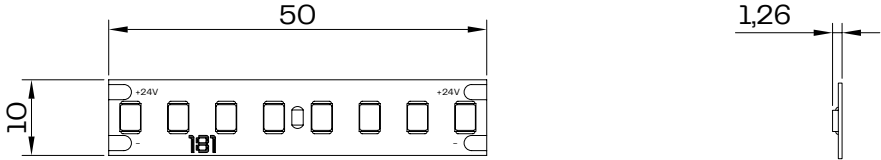

Related Items More available



Profiles

- Aluminum Plaster Profile
- Aluminum Profile Black
- Aluminum Profile Half Round



PWM Driver

- LM 75 24 G1D2
- LM 75 24 G1T2



Power Supply

- Meanwell HLG 240 24
- Meanwell RSP 200 24
- Meanwell LPV 100 24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181



Scan for full info

LED Strip High Output


Key Specs

Power Consumption (W/m)	14,4
LED quantity (per meter)	160
Cutting interval (mm)	50
Lumens efficacy (lm/W)	138

Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

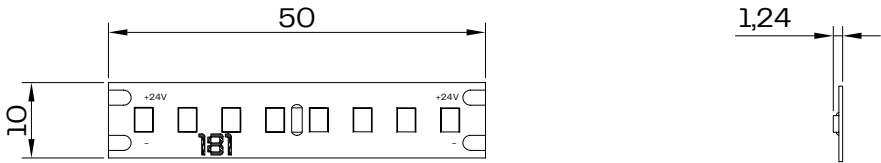

Related Items More available



Profiles

- Aluminum Plaster Profile
- Aluminum Profile Black
- Aluminum Profile Half Round




PWM Driver

- LM 150 24 G1A2
- LM 75 24 G1T2



Power Supply

- Meanwell HLG 240 24
- Meanwell RSP 200 24
- Meanwell LPV 100 24



SpagLEDti

- LED Cable Beige
- LED Cable Black

22

23



181



Scan for full info

LED Strip RGBW 2700K


Key Specs

Power Consumption (W/m)	19,2
LED quantity (per meter)	70
Cutting interval (mm)	100
Lumens efficacy (lm/W)	62


Color Range




Beam Angle




Specifications



Dimensions (in mm)

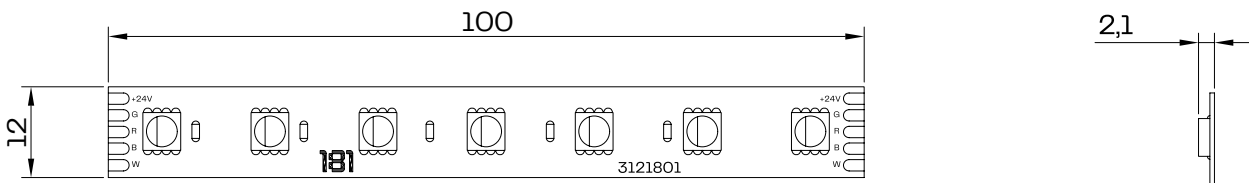

Related Items More available

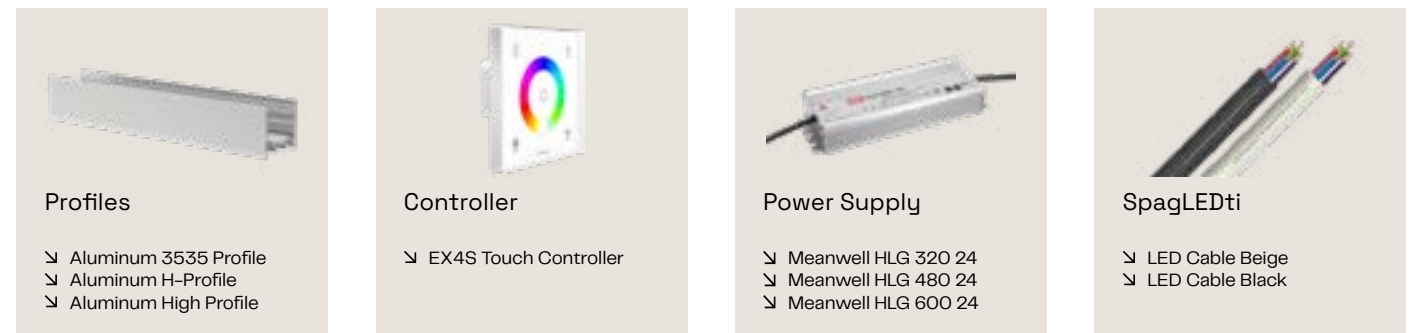



181



Scan for full info

LED Strip RGBW 3000K IP65

Key Specs


Power Consumption (W/m)	19,2
LED quantity (per meter)	70
Cutting interval (mm)	100
Lumens efficacy (lm/W)	60




Color Range




Beam Angle




Specifications



Dimensions (in mm)

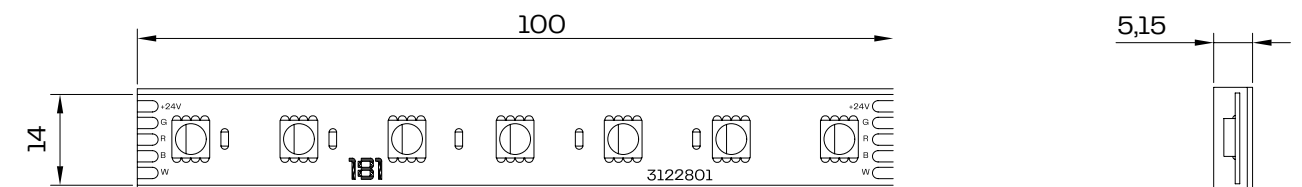

Related Items More available




Profiles

- Aluminum 3535 Profile
- Aluminum Corner Profile




Controller

- EX4S Touch Controller



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181



Scan for full info

LED Strip Tunable White


Key Specs

Power Consumption (W/m)	19,2
LED quantity (per meter)	240
Cutting interval (mm)	100
Lumens efficacy (lm/W)	84


Color Range




Beam Angle



Specifications



Dimensions (in mm)

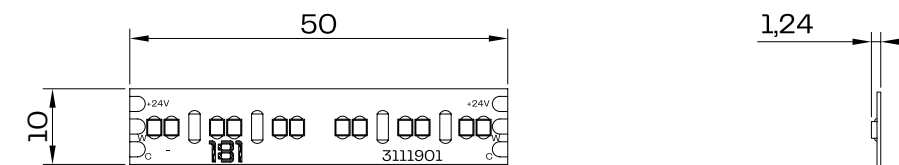

Related Items More available

Profiles

- Aluminum 3535 Profile
- Aluminum H-Profile
- Aluminum High Profile

Controller

- EX2 DMX/Rf CT Controller

Drivers

- LM 100 24 G2M2
- LM 100 24 G2D2
- LM 100 24 G2A2

Power Supplies

- Meanwell HLG 240 24
- Meanwell HLG 320 24
- Meanwell RSP 200 24



181



Scan for full info

LED Strip COB RGB


Key Specs

Power Consumption (W/m)	15
LED quantity (per meter)	840
Cutting interval (mm)	62,5

Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

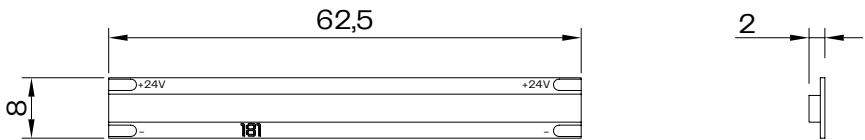

Related Items More available

Profiles

- Aluminum 3535 Profile
- Aluminum Profile Black
- Aluminum Plaster Profile

DMX Controller

- DIN 4x4 DIN DMX 4CH

Driver

- Dali 4x5A

Power Supplies

- Meanwell HLG 240 24
- Meanwell HLG 320 24
- Meanwell RSP 200 24



181



Scan for full info

LED Strip COB


Key Specs	3000K	4000K	6500K
Power Consumption (W/m)	11	11	11
LED quantity (per meter)	512	512	512
Cutting interval (mm)	62,5	62,5	62,5
Lumens efficacy (lm/W)	85	95	95




Color Range



Beam Angle



Specifications



Dimensions (in mm)



Related Items More available



Profiles

- Aluminum Profile 3535
- Aluminum Profile High
- Aluminum Profile Low



COB Connector

- Input
- Extension



Driver

- LM 75 24 G1T2



Power Supplies

- Meanwell HLG 240 24
- Meanwell HLG 320 24
- Meanwell RSP 200 24



181



Scan for full info

LED Strip CSP RGBW


Key Specs

Power Consumption (W/m)	20
LED quantity (per meter)	840
Cutting interval (mm)	33.3
Lumens efficacy (lm/W)	43

Color Range



Beam Angle



Specifications

PWM

IP20



24V DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

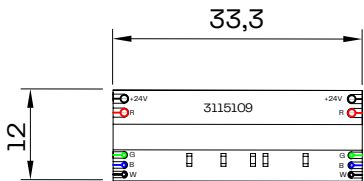

Related Items More available

Profiles

- Aluminum Profile 3535
- Aluminum Profile Black
- Aluminum Plaster Profile

DMX Controller

- LT-820-5A

Driver

- Dali 4x5A

Power Supplies

- Meanwell HLG 240 24
- Meanwell HLG 320 24
- Meanwell RSP 200 24



181



Scan for full info

LED Strip Single Color IP68

Key Specs

Power Consumption (W/m)	10
LED quantity (per meter)	120
Cutting interval (mm)	100




Color Range




Specifications




Beam Angle



Dimensions (in mm)



Related Items More available



M12 3-Pin Cables

- M12 3pin Input cable
- M12 3Pin Power cable
- M12 3Pin End cap



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Drivers

- LM 36 24 G1A2
- LM 36 12 G1D2
- LM 36 24 F1P1



Profiles

- Aluminum Profile 3535



181



Scan for full info

LED Strip RGBW IP68

Key Specs


Power Consumption (W/m)	17
LED quantity (per meter)	60
Cutting interval (mm)	100



Color Range




Beam Angle



Specifications



Dimensions (in mm)



Related Items More available



M12 3-Pin Cables

- M12 3pin Input cable 1m
- M12 3Pin Power cable
- M12 3Pin End cap



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Drivers

- LM 150 24 G4K3



Profiles

- Aluminum H Profile High

40

Concealed

131

DiGi Flex





181



Scan for full info

DiGi LED Strip RGB 16mm 24V


Key Specs

Power Consumption (W/m)	17
Pixel pitch (mm)	16,66
LED quantity (per meter)	60
Luminous Flux (cd)	450
Cutting interval (mm)	100

Color Range



Beam Angle



Specifications

SPI

IP20


24V
DC

CE

RoHS

Temp
-20 ~ +60°C

Dimensions (in mm)



Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell HLG 320 24

➤ Meanwell HLG 480 24

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGB 16mm 12V

Key Specs


Power Consumption (W/m)	14,4
Pixel pitch (mm)	16,67
LED quantity (per meter)	60
Luminous Flux (cd)	450
Cutting interval (mm)	16,67



Color Range



Beam Angle



Specifications

SPI

IP20


12V DC

CE

RoHS

Temp
-30 - +55°C

Dimensions (in mm)

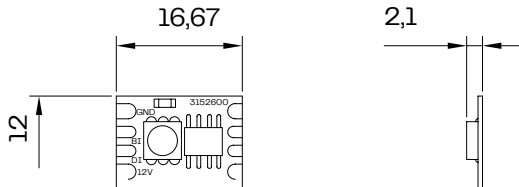

Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell HLG 320 12

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0,14



181



Scan for full info

DiGi LED Strip RGB 24mm 12V


Key Specs

Power Consumption (W/m)	10
Pixel pitch (mm)	24
LED quantity (per meter)	42
Luminous Flux (cd)	315
Cutting interval (mm)	24

Color Range



Beam Angle



Specifications

SPI

IP20


12V DC

CE

RoHS

Temp
-30 - +55°C

Dimensions (In mm)

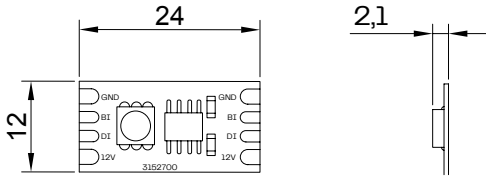

Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell HLG 320 12

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGB 38mm 12V


Key Specs

Power Consumption (W/m)	6,5
Pixel pitch (mm)	38,46
LED quantity (per meter)	26
Luminous Flux (cd)	170
Cutting interval (mm)	38,46

Color Range



Beam Angle



Specifications

SPI

IP20


12V DC

CE

RoHS

Temp
-20 - +60°C

Dimensions (in mm)

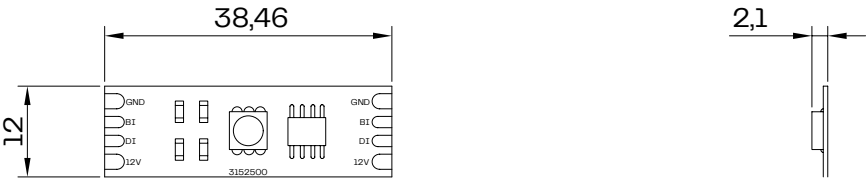

Related Items More available



Profiles

- Aluminum Profile Half Round
- Profile cover Clear
- Profile cover Frost



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit




Power Supply

- Meanwell HLG 320 12



DiGi LED Cable

- Digital LED Cable 2x1 + 2x0.14

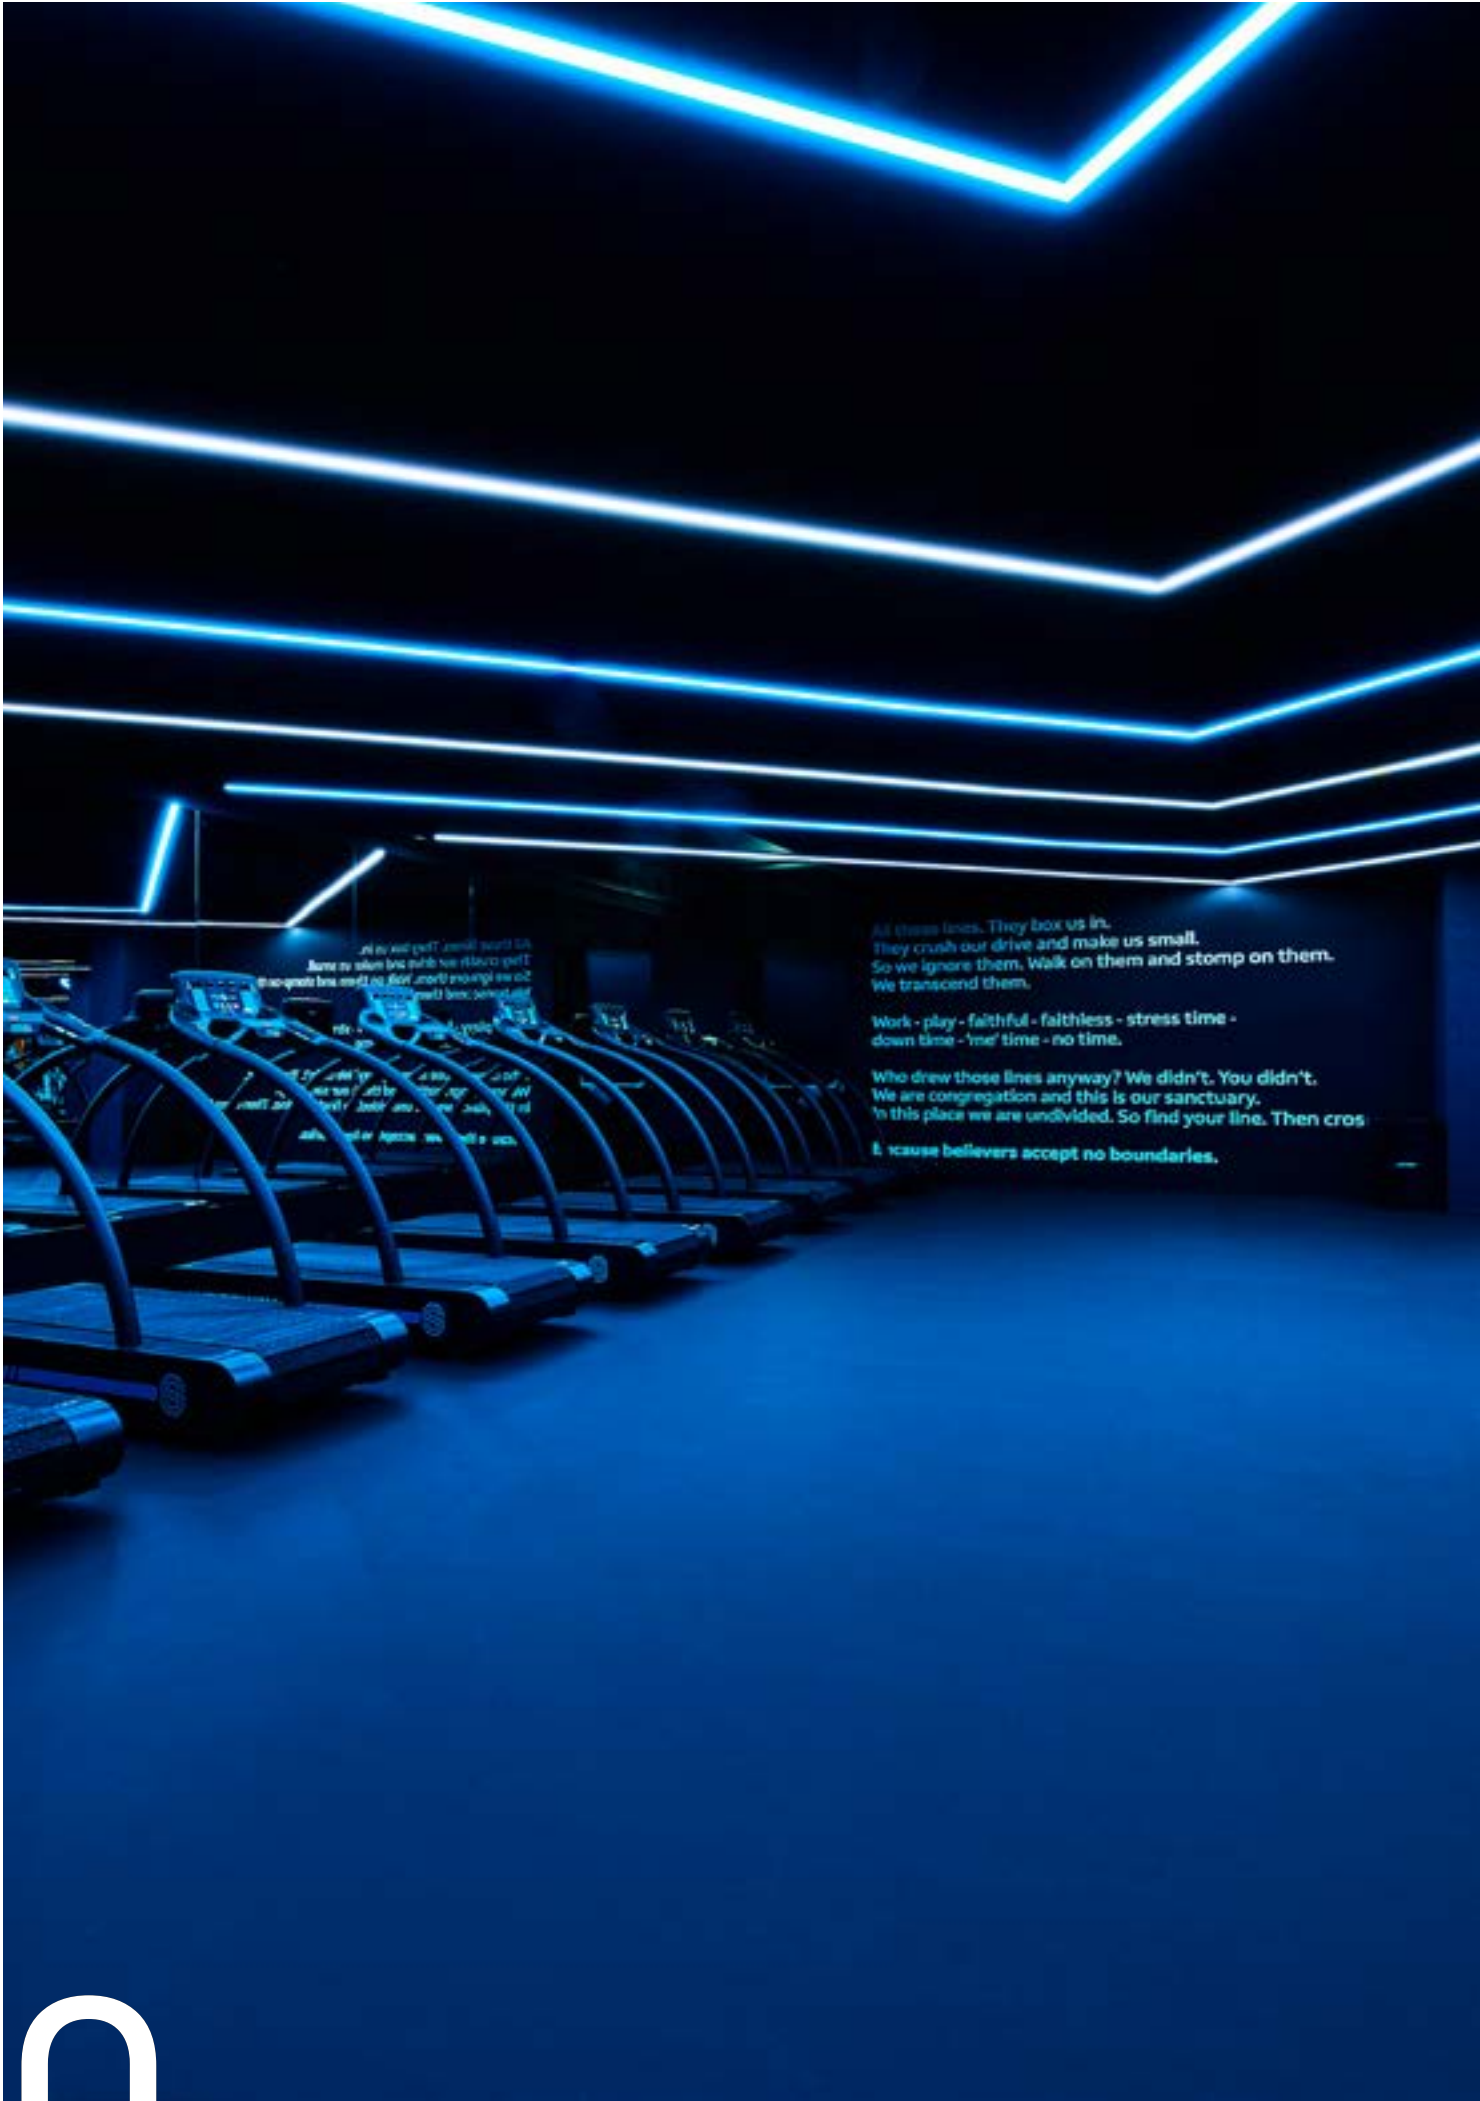

181



Scan for full info

DiGi LED Strip RGB 83mm 24V


Key Specs

Power Consumption (W/m)	16,8
Pixel pitch (mm)	83,33
LED quantity (per meter)	26
Luminous Flux (cd)	570
Cutting interval (mm)	83,33

Color Range



Beam Angle



Specifications

SPI

IP20


24V DC

CE

RoHS

Temp
-20 - +60°C

Dimensions (in mm)

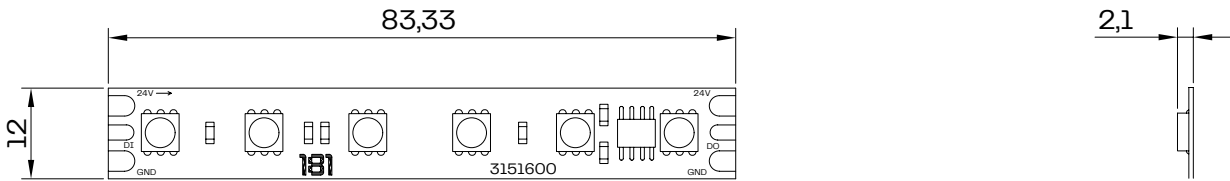

Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell HLG 320 24

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0,14



181



Scan for full info

DiGi LED Strip RGBW 100mm 24V

Key Specs


Power Consumption (W/m)	19,2
Pixel pitch (mm)	100
LED quantity (per meter)	70
Luminous Flux (cd)	920
Cutting interval (mm)	100



Color Range



Beam Angle



Specifications

SPI

IP20


24V
DC

CE

RoHS

Temp
-20 - +60°C

Dimensions (in mm)

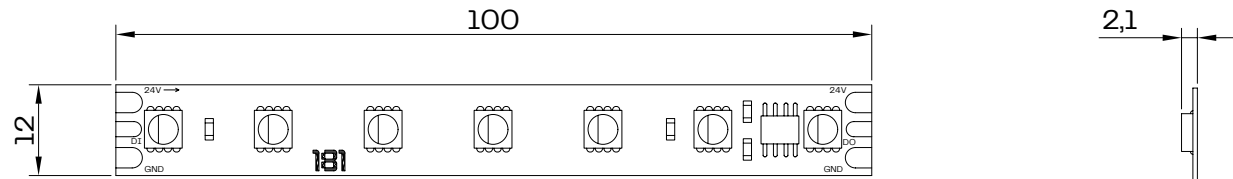

Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell RSP 200 24

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip Amber Drift 16mm 12V

Key Specs


Power Consumption (W/m)	14,4
Pixel pitch (mm)	16.67
LED quantity (per meter)	60
Luminous Flux (cd)	930
Cutting interval (mm)	16,67



Color Range



Beam Angle



Specifications

SPI

IP20


12V DC

CE

RoHS

Temp
-20 - +60°C

Dimensions (in mm)

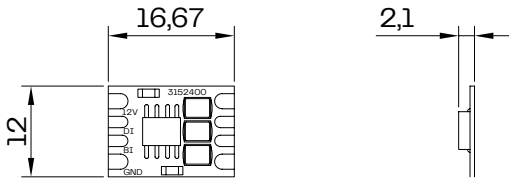

Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell RSP 200 12

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip 3000K IP68

Key Specs


Power Consumption (W/m)	15
Pixel pitch (mm)	100
LED quantity (per meter)	70
Luminous Flux (cd)	485



Color Range



Beam Angle



Specifications

SPI


IP68

IK08

24V DC

RoHS

Dimensions (in mm)



Related Items More available

Profiles

Aluminum H Profile High

DiGidot C4

Live
Extended
PxLNet Transceiver kit

Power Supply

Meanwell HLG 150 24
Meanwell HLG 240 24
Meanwell HLG 320 24

DiGi LED Cable

Digital LED Cable 2x1 + 2x0.14



181




Scan for full info

DiGi LED Strip RGBW IP68

Key Specs


Power Consumption (W/m)	18
Pixel pitch (mm)	100
LED quantity (per meter)	70
Luminous Flux (cd)	873

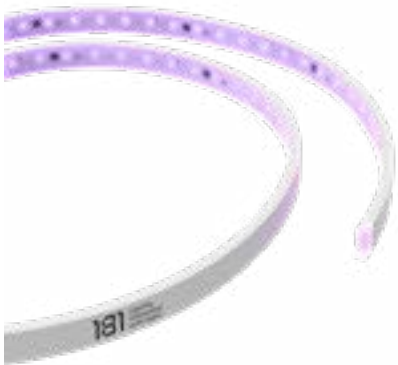


Color Range




Beam Angle



Specifications

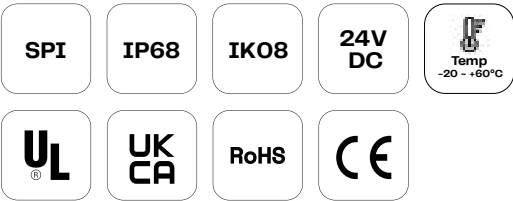

Dimensions (in mm)



Related Items More available



Profiles

▾

Aluminum H Profile High



DiGidot C4

▾

Live

▾

Extended

▾

PxLNet Transceiver kit



Power Supply

▾

Meanwell HLG 150 24

▾

Meanwell HLG 240 24

▾

Meanwell HLG 320 24



DiGi LED Cable

▾

Digital LED Cable 2x1 + 2x0.14

60

Concealed

131

Panels





181



Scan for full info

DiGi FlexSheet

Key Specs


Pixel Pitch (mm)	40
Pixels	96
Power Consumption (W)	24
Luminous Flux (cd)	680



Color Range



Beam Angle



Specifications

SPI

Temp
-30 ~ +60°C


IP20

CE

RoHS

12V
DC

Dimensions (In mm)

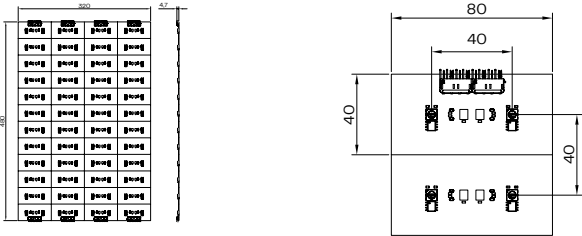

Related Items More available

Connector

▾ PCB Leader

DiGidot PxLNet Node

▾ PxLNet Node U48
▾ PxLNet Node U96
▾ PxLNet Transceiver

Input Cable

▾ Push in terminal to Female connector

Servers

▾ i5 Server
▾ i7 Server
▾ i9 Server



181



Scan for full info

DiGi Evenlight Panel

Key Specs


Color Range	RGBW
LED Type	SMD3535
Pixels	64
Luminous Flux (cd)	33



Color Range



Beam Angle



Specifications

SPI

PWM

IP20

24V DC


CE

RoHS

M16

Temp
-30 - +70°C

Dimensions (In mm)

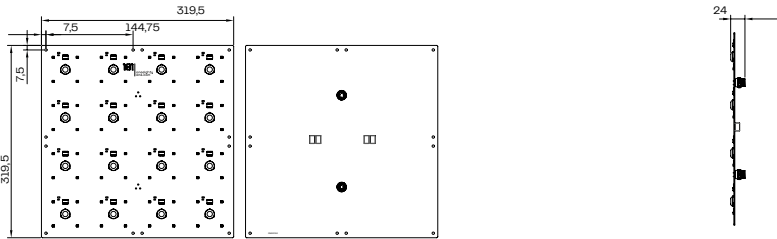

Related Items More available

Madrix

➤

MADRIX License

➤

MADRIX Key

DiGidot PxLNet Node

➤

PxLNet Node U48

➤

PxLNet Node U96

➤

PxLNet Transceiver

Power Supply

➤

RHP-1U Rack System

➤

RKP-1UT Rack System

Servers

➤

i5 Server

➤

i7 Server

➤

i9 Server


66

Channels

131



Aluminum Profiles

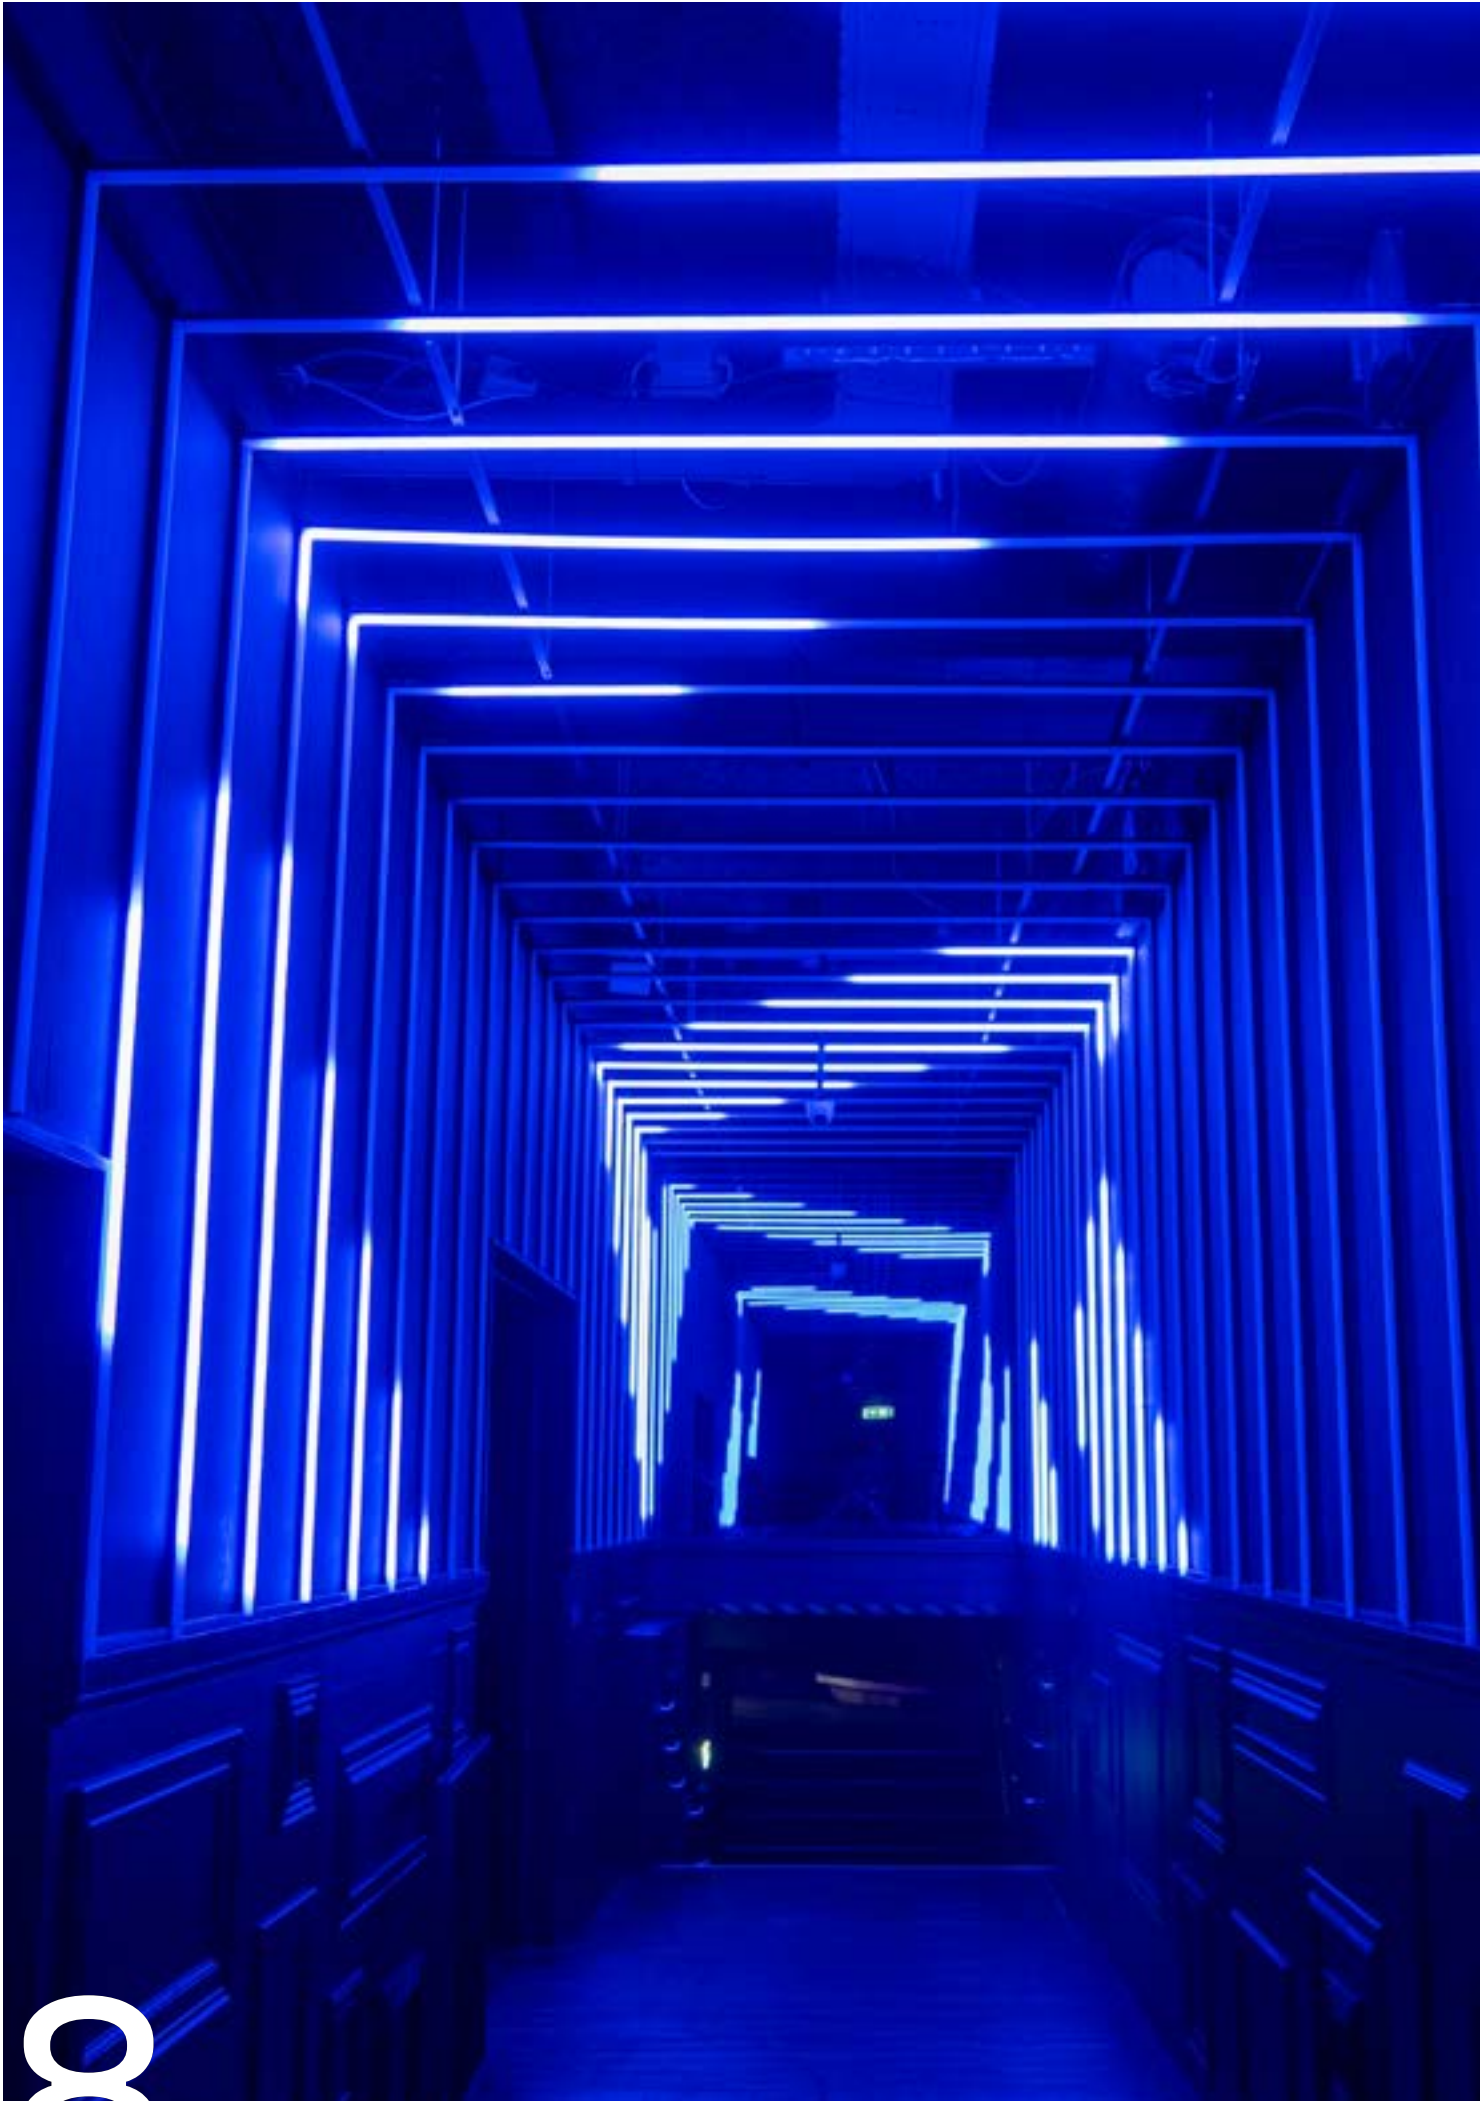

Scan for full info

Aluminum Profile High

Key Specs


Height (mm)	19.65
Width (mm)	18.3
Length (mm)	3000
Material	Aluminum
Finish	Anodised

Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR



Dimensions (in mm)



Related Items More available

Profile Covers

▾ Flat Clear

▾ Flat Opal

▾ Flat Black (translucent)

Profile Endcap 9111X

▾ Endcap square grey

▾ Endcap square black

Profile Mounting clip

▾ 9112X/9111X Grey

▾ 9112X/9111X Black

Adjustable clip

▾ 9112X/9111X Silver



181



Scan for full info

Aluminum Profile Low

Key Specs


Height (mm)	13
Width (mm)	18.3
Length (mm)	3000
Material	Aluminum
Finish	Anodised

Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR



Dimensions (in mm)



Related Items More available



Profile Covers

- Flat Clear
- Flat Opal
- Flat Black (translucent)



Profile Endcap

- Endcap low Grey
- Endcap low Black



Profile Mounting clip

- 9112X/9111X Grey
- 9112X/9111X Black



Adjustable clip

- 9112X/9111X Silver



181



Scan for full info

Aluminum Profile Half Round

Key Specs


Height (mm)	9
Width (mm)	18
Length (mm)	3000
Material	Aluminum
Finish	Anodised



Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR

Dimensions (in mm)



Related Items More available

Profile Covers

▾ Round Frost

▾ Round Clear

Profile Endcap

▾ Grey

▾ Black

Profile Mounting clip

▾ 9112X/9111X Silver

▾ 9112X/9111X black

Profile Endcap

▾ Low cap with magnet



131



Scan for full info

LED Profile 3535

Key Specs


Height (mm)	35
Width (mm)	35
Length (mm)	3000
Material	Aluminum
Finish	Anodised

Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR



Dimensions (In mm)



Related Items More available



Profile Covers

▾ Flat Opal

▾ Flat Black (translucent)



Profile Endcap

▾ Grey


▾ Black



Pendant Steelwire

▾ Silver

▾ Black



Profile Mounting Clip

▾ Silver



Aluminum Profile Corner

Key Specs


Height (mm)	29.65
Width (mm)	29.65
Length (mm)	3000
Material	Aluminum
Finish	Anodised



Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR

Dimensions (in mm)



Related Items More available

- 

Profile Cover

▾ Round Opal
- 

Profile Endcap


▾ Endcap Corner
- 

Pendant Steelwire

▾ Silver
▾ Black
- 

Profile Mounting Clip

▾ Silver

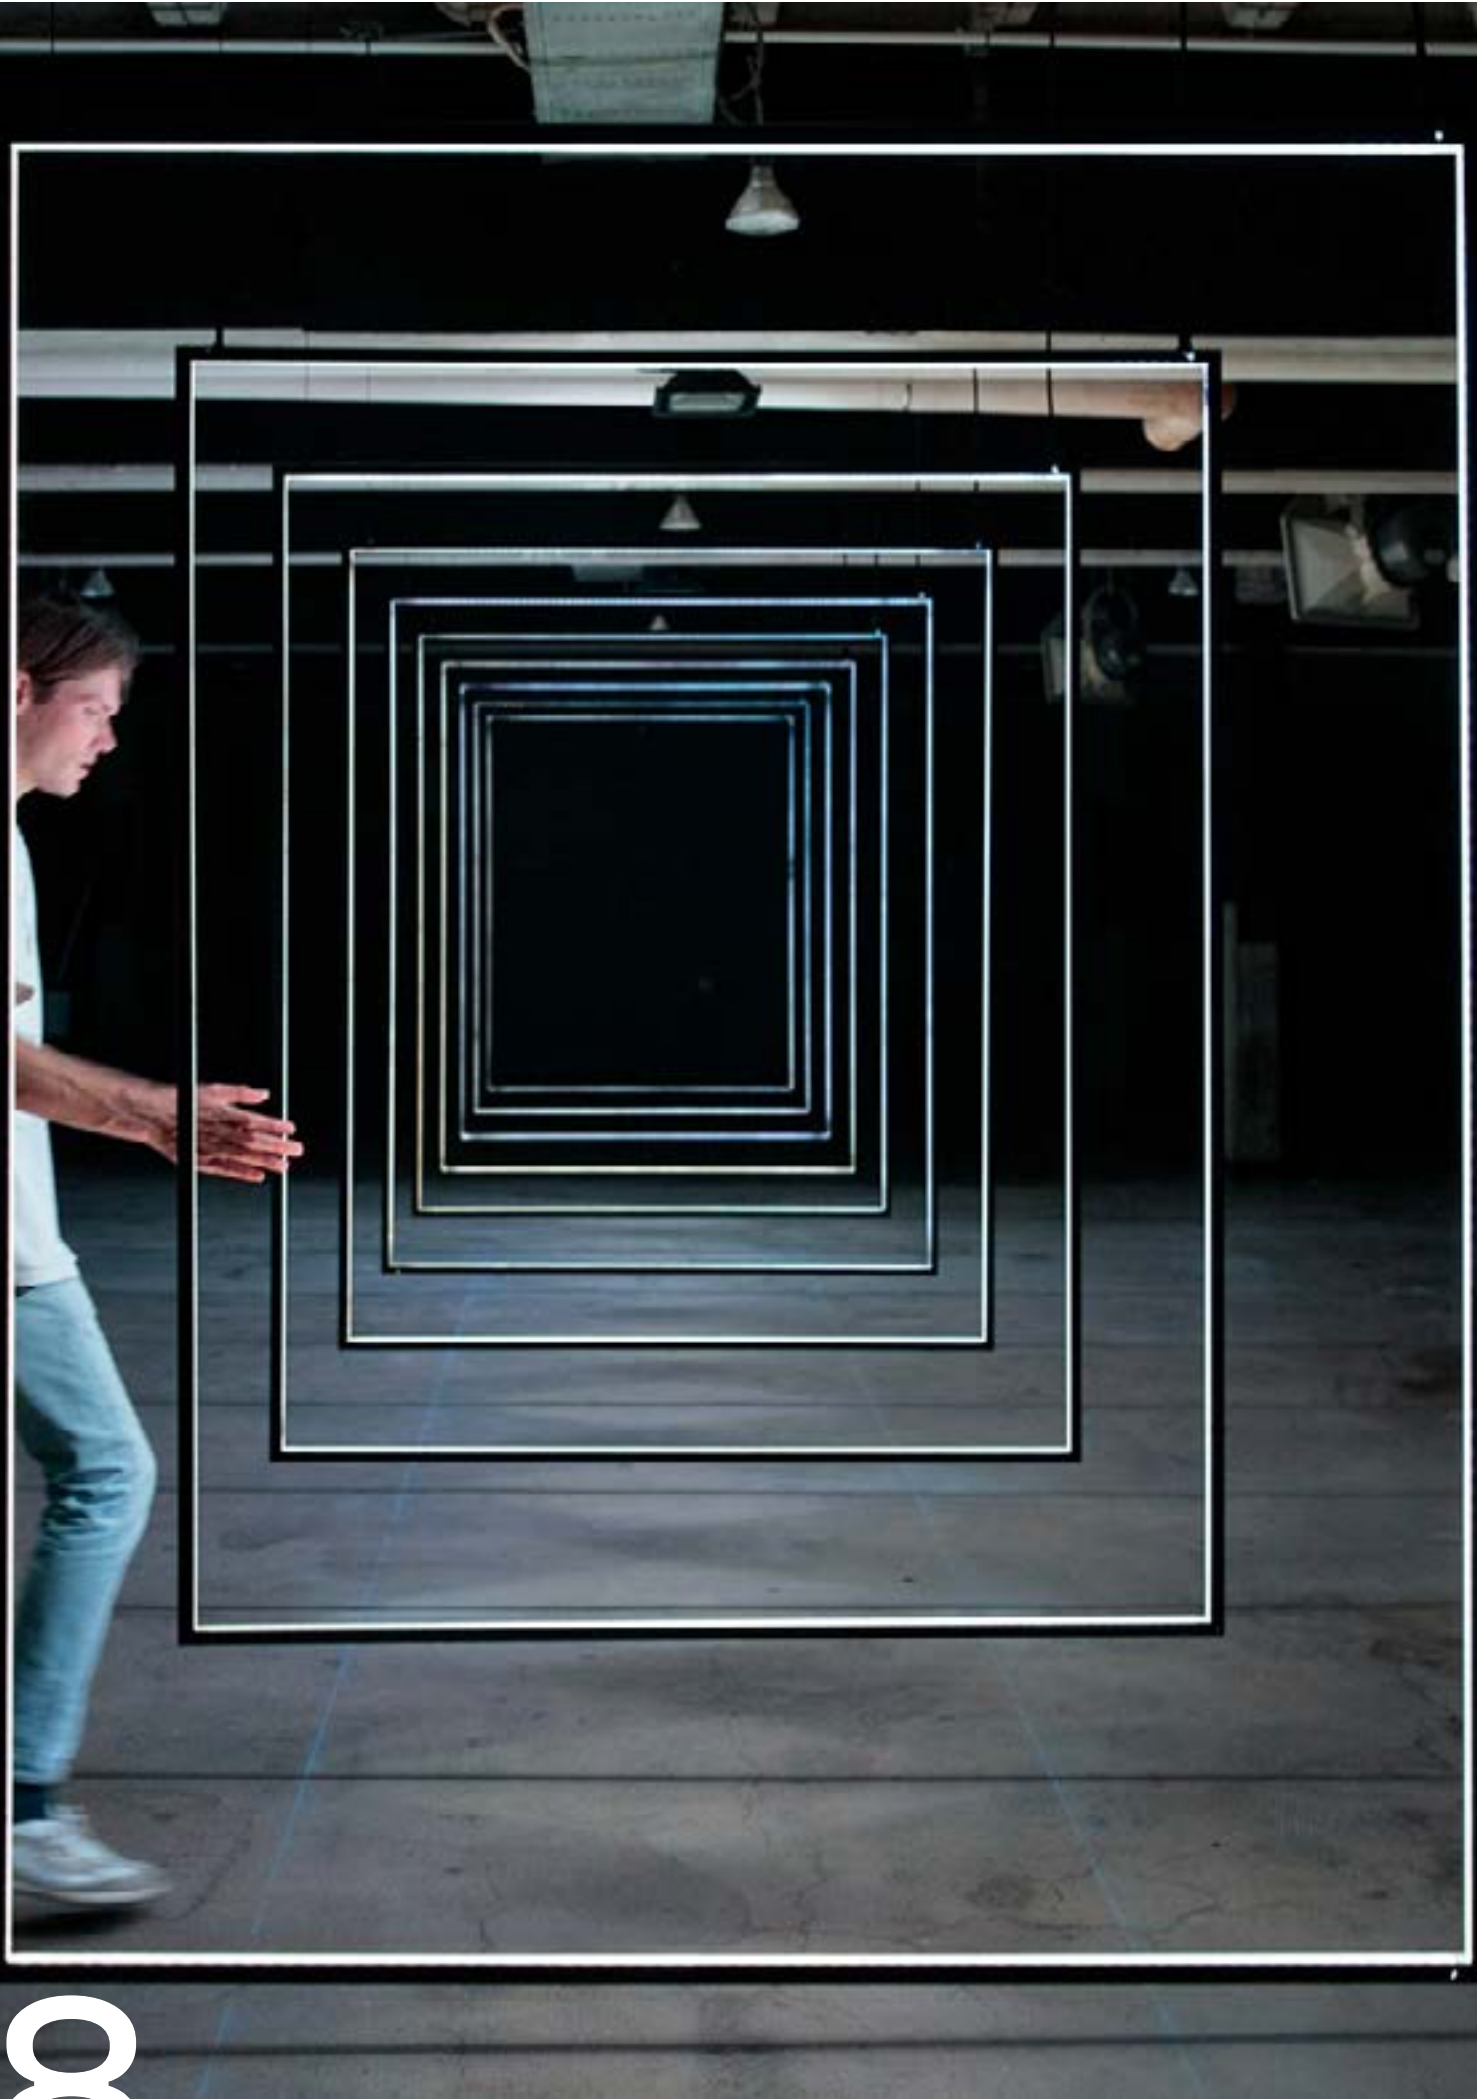

181



Scan for full info

Aluminum Profile Mini

Key Specs


Height (mm)	10.5
Width (mm)	10.5
Length (mm)	3000
Material	Aluminum
Finish	Anodised

Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR



Dimensions (in mm)



Related Items More available



Profile Cover

▾ Cover mini



Profile Endcap

▾ Silver
▾ Black



LED Strip

▾ COB LED strip



Pendant Steelwire

▾ Silver
▾ Black



181



Scan for full info

Aluminum Plaster Profile

Key Specs

Height (mm)	19.65
Width (mm)	56
Length (mm)	3000
Material	Aluminum
Finish	Anodised




Housing Color

Grey

Custom
ANY RAL COLOR

Dimensions (in mm)

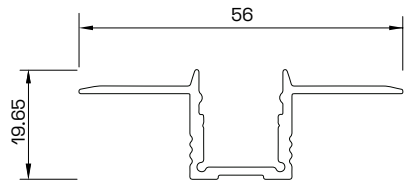

Related Items More available



Profile Covers

▾ Flat Clear

▾ Flat Opal



Profile Endcap 9111X

▾ Grey Endcap



DiGi LED Strip

▾ RGBW 100mm 24V




LED Strip

▾ High Efficiency

131

Direct View

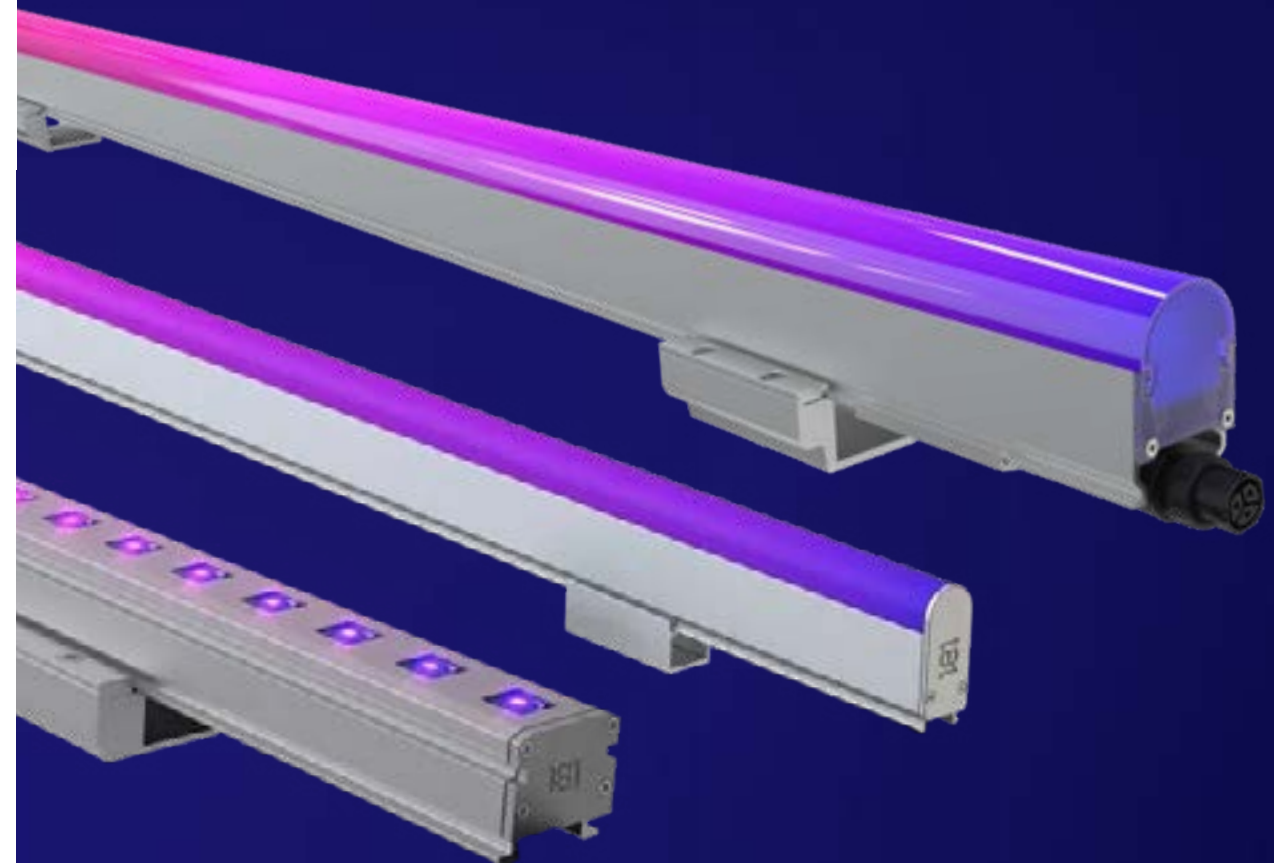

DiGi Linears



181



Scan for full info

DiGi Linear D-serie


Key Specs	RGB
Power Consumption (W/m)	10
Luminous Flux (cd)	360
Pixel pitch (mm)	25
Channels (per meter)	120
Lengths (mm)	300/600/900/1200/1500




Color Range



Beam Angle




Specifications

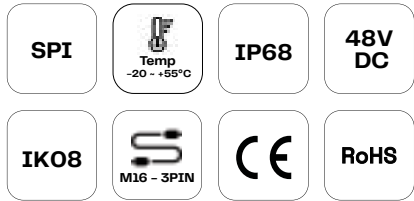

Housing Color



Dimensions (In mm)

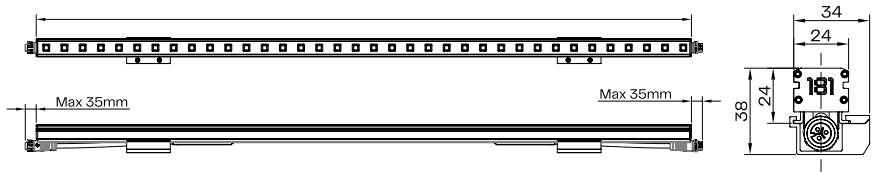

Related Items More available



M16 3-Pin Cables

- Input Cable
- Data Link Cable
- Extension Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 150 48
- Meanwell HLG 240 48
- Meanwell HLG 320 48



Mounting Bracket

- Mounting bracket D-Serie



181



Scan for full info

DiGi Linear E-serie


Key Specs	RGB
Power Consumption (W/m)	13
Luminous Flux (cd)	216
Pixel pitch (mm)	75
Channels (per meter)	40
Lengths (mm)	300/600/900/1200/1500




Color Range



Beam Angle




Specifications

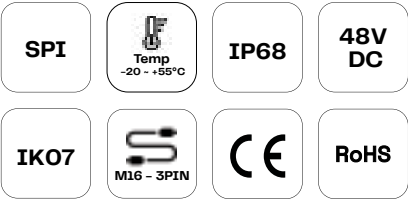

Housing Color



Dimensions (in mm)

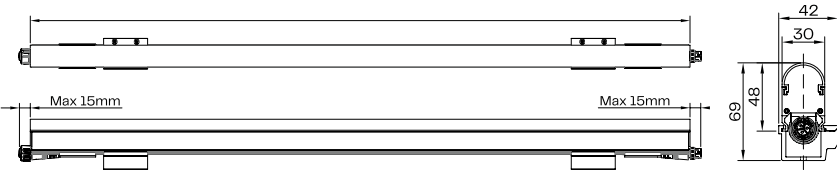

Related Items More available



M16 3-Pin Cables

- Input Cable
- Data Link Cable
- Extension Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit




Cable Guide

- Cable Guide E-serie



Mounting Bracket

- Mounting bracket E-serie

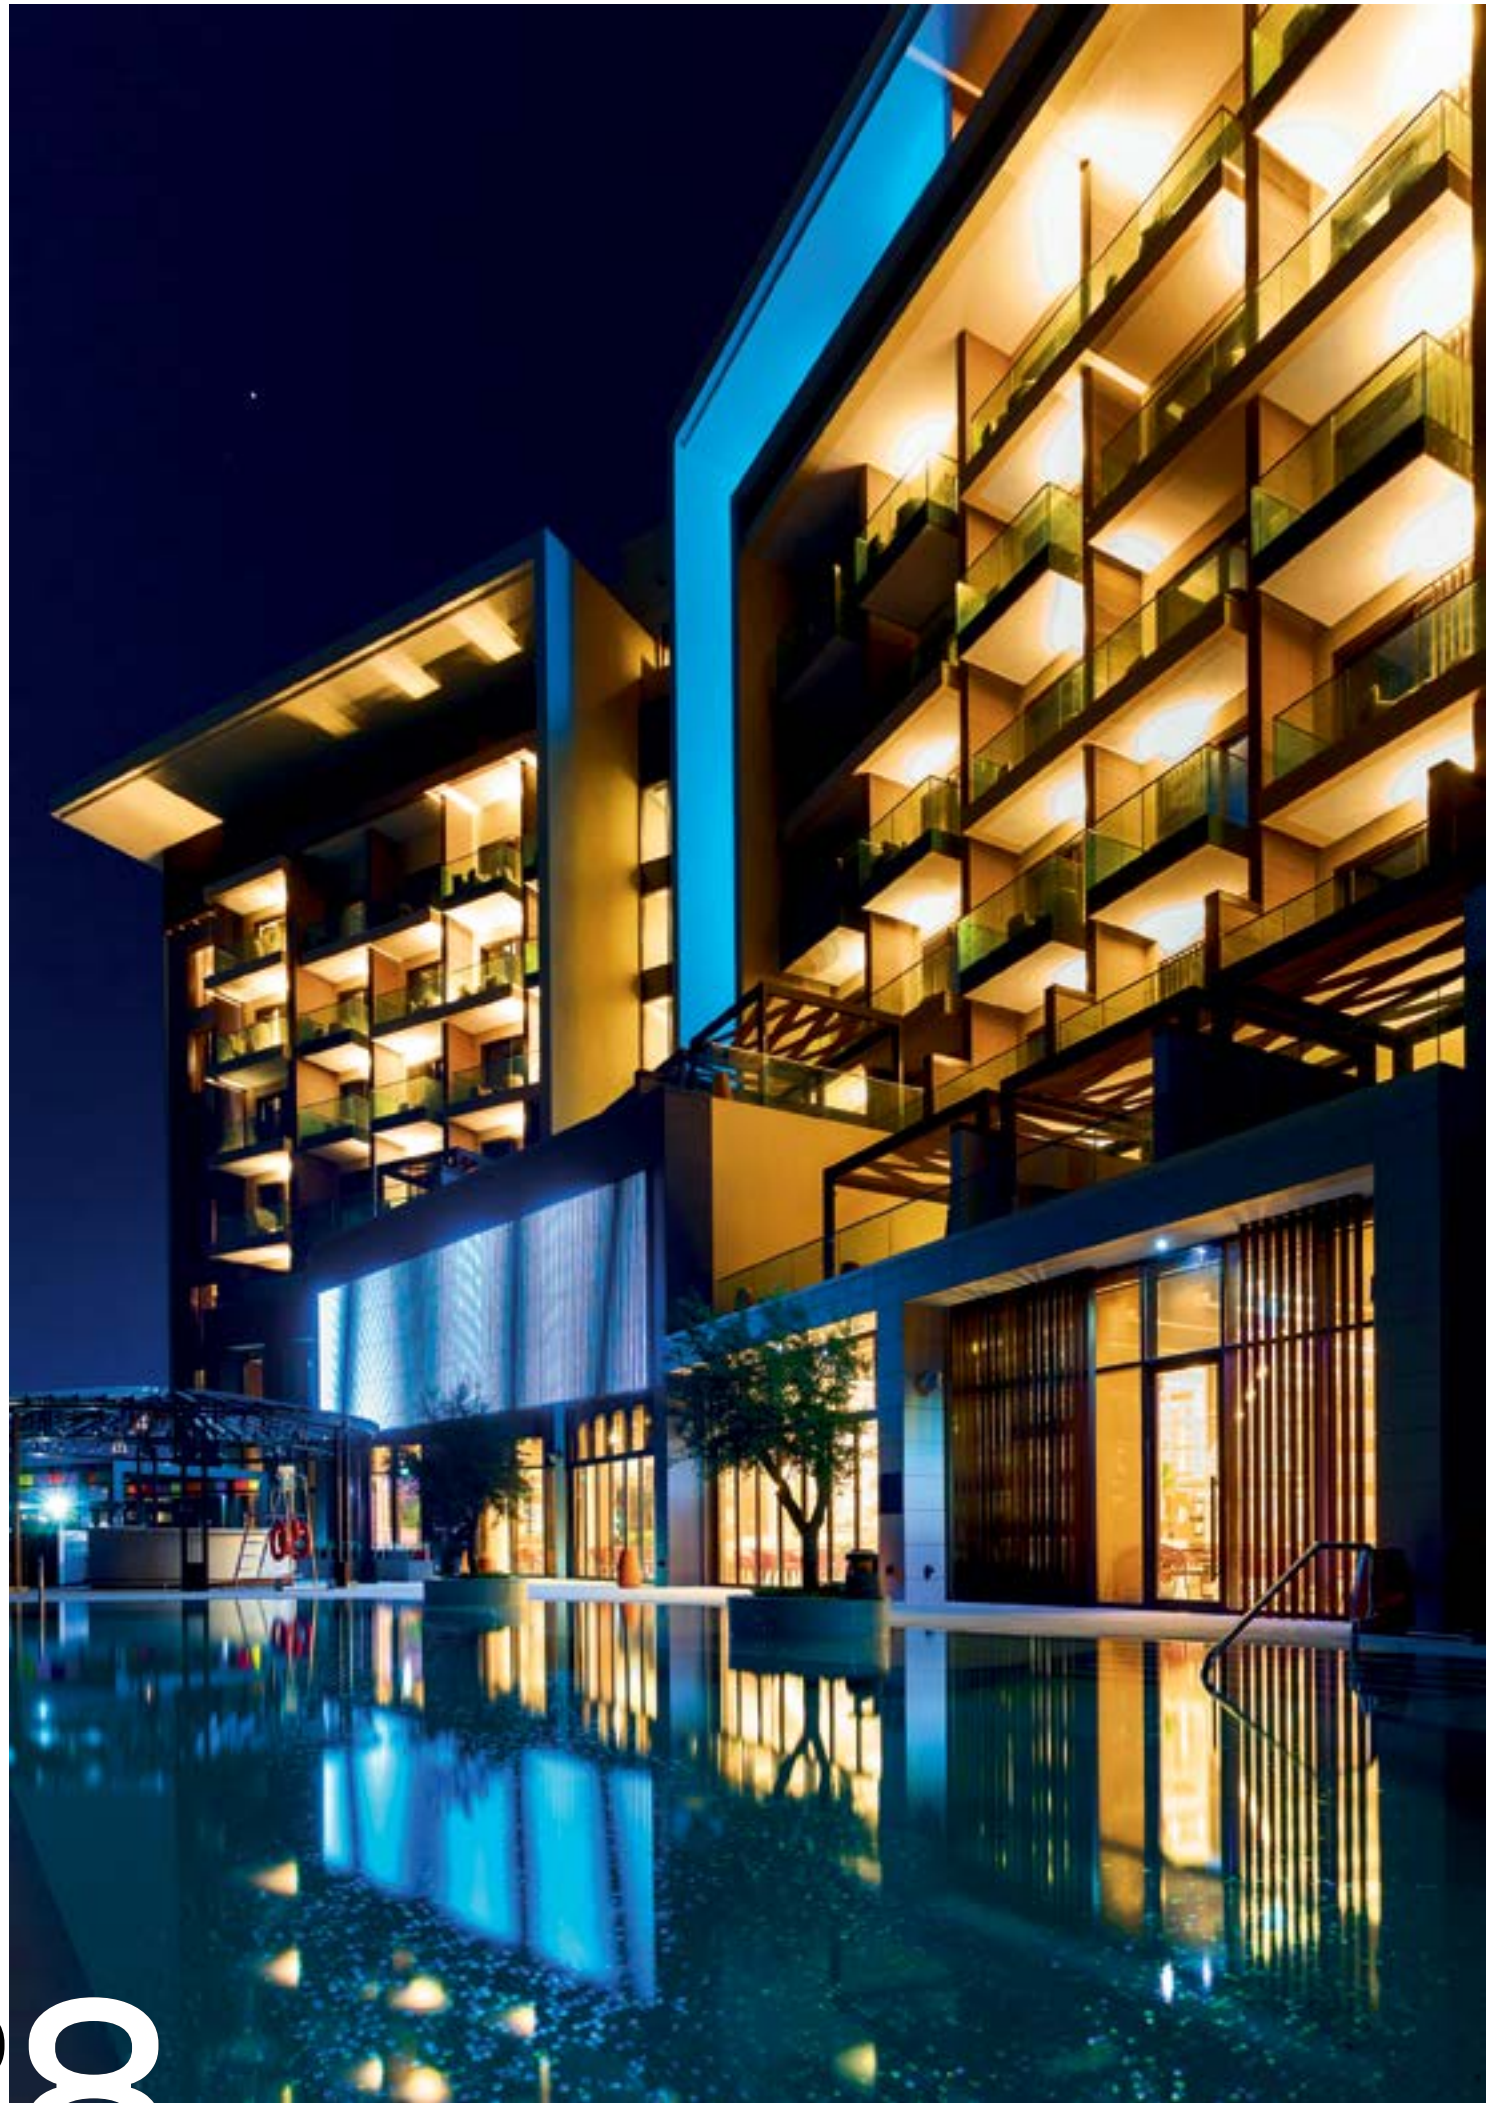

181



Scan for full info

DiGi Linear V-serie


Key Specs	Tunable	RGBW
Power Consumption (W/m)	17	23
Luminous Flux (cd)	580	430
Pixel pitch (mm)	16	16
Channels (per meter)	180	240
Lengths (mm)	300/600/900/1200/1500	




Color Range



Beam Angle




Specifications

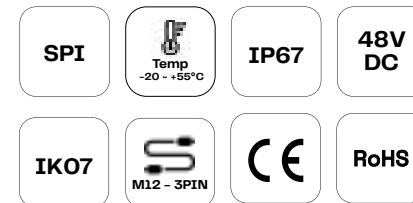


Housing Color



Dimensions (In mm)

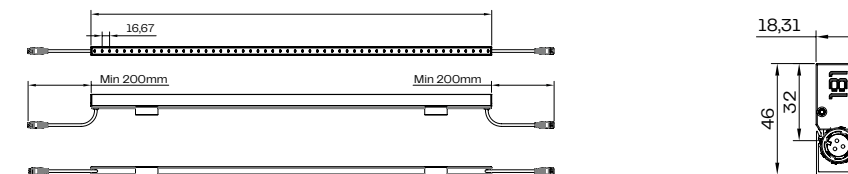


Related Items More available



131

Direct View

Dots

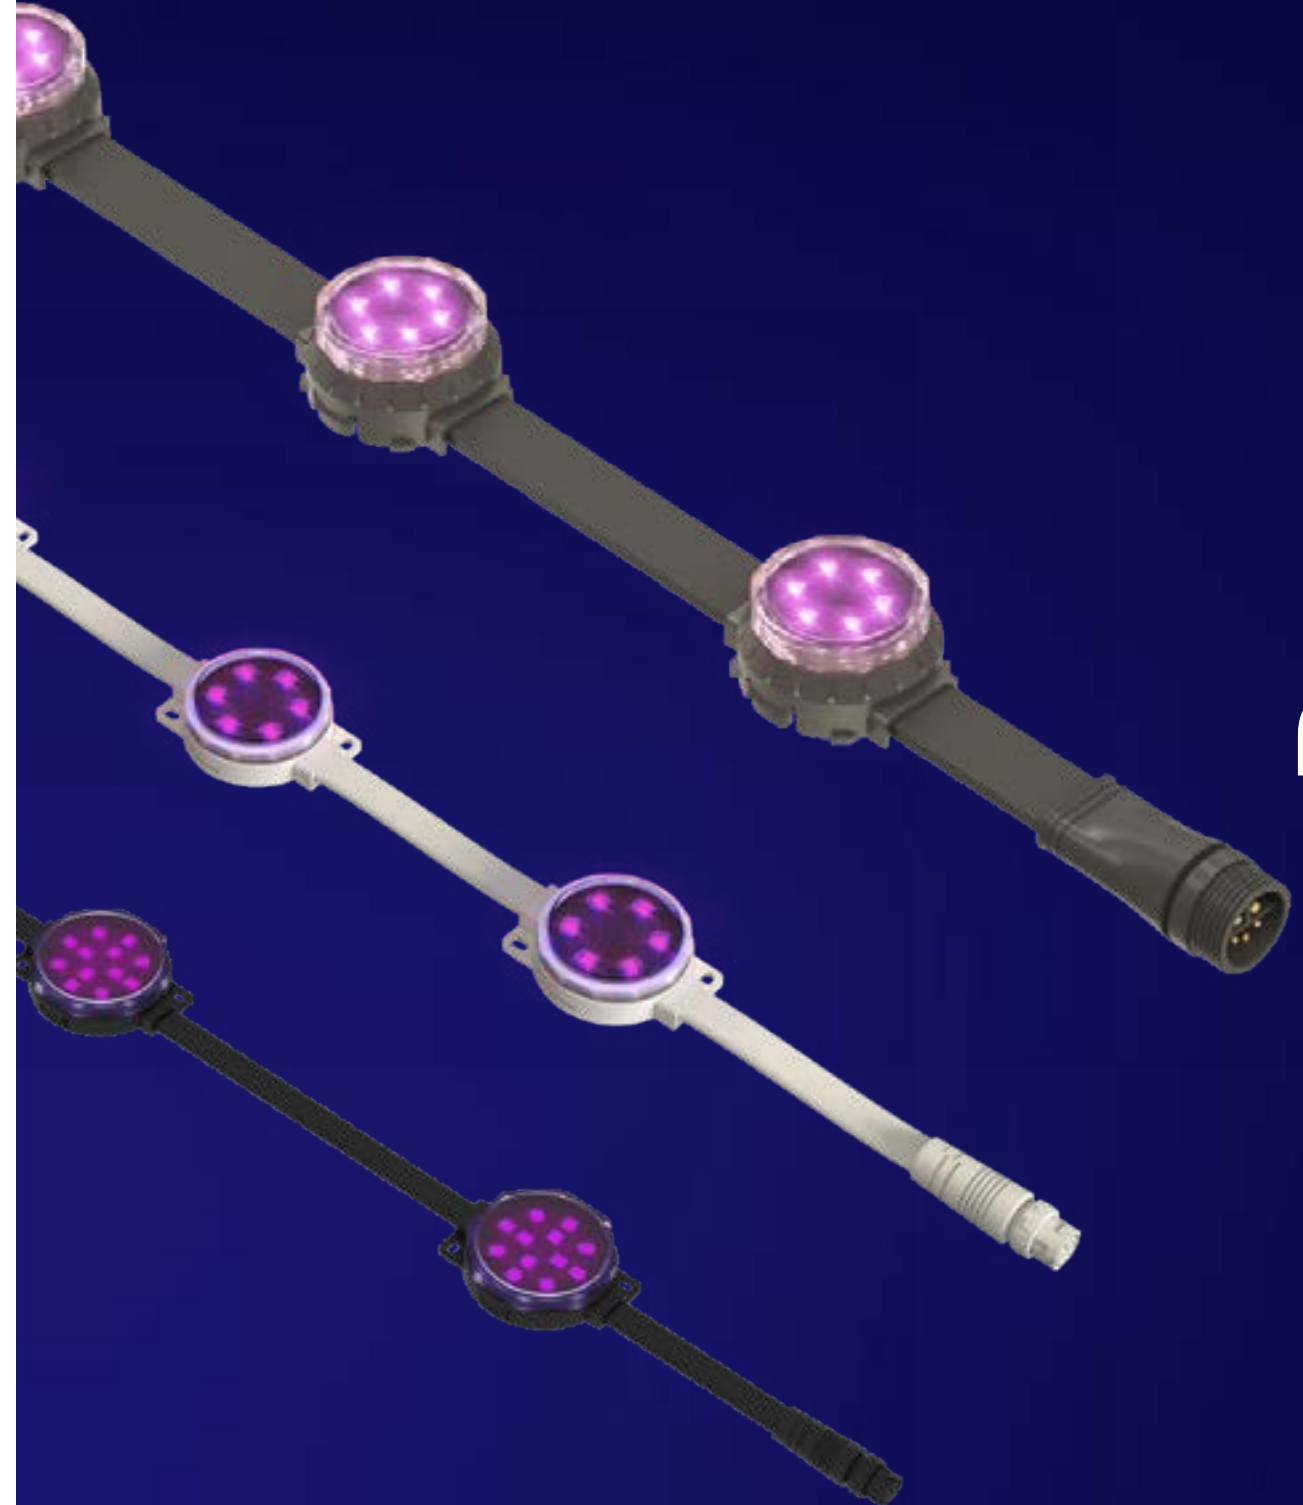

90



181



Scan for full info

DiGi Module XT3


Key Specs	RGB	RGBW
Luminous Flux (cd)	19	24
LEDs per Pixel	3	4
Power Consumption (W)	0,75	1
Pixel pitch (mm)	Customizable from 100mm	




Color Range



Beam Angle





Specifications



Housing Color



Dimensions (In mm)

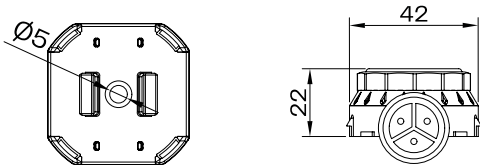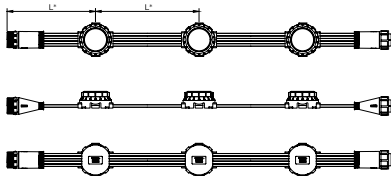

Related Items More available




M20E Cables

- Extension Cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



XT Add-on

- XT Turbo Module
- XT Bulb



Mounting Clip

- Mounting clip XT Module



181



Scan for full info

DiGi Module XT6


Key Specs	RGB	RGBW
Luminous Flux (cd)	38	50
LEDs per Pixel	6	8
Power Consumption (W)	1,5	2
Pixel pitch (mm)	Customizable from 100mm	




Color Range




Beam Angle






Specifications



Housing Color



Dimensions (in mm)

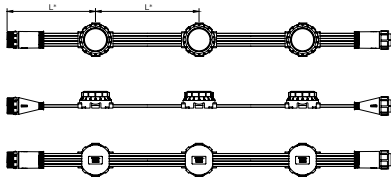

Related Items More available




M20E Cables

- Extension Cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



XT Add-on

- XT Turbo Module
- XT Bulb



Mounting Clip

- Mounting clip XT Module



131



Scan for full info

DiGi Module E3S/E6S/E12S


Key Specs	RGB E3S	RGB E6S	RGB E12S
Luminous Flux (cd)	19	38	72
LEDs per Pixel	3	6	12
Power Consumption (W)	0,75	1,5	3
Pixel pitch (mm)	Customizable from 100mm		




Color Range



Beam Angle







Specifications

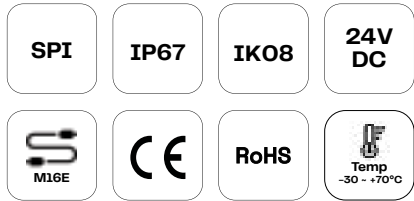


Housing Color



Dimensions (in mm)

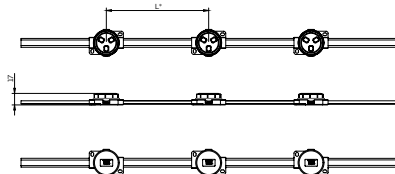


Related Items More available



M16E Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Servers

- i5 Server
- i7 Server
- i9 Server



131




Scan for full info

DiGi Mesh

Key Specs


LEDs per Pixel	Customizable
Pixel pitch (mm)	Customizable from 40mm

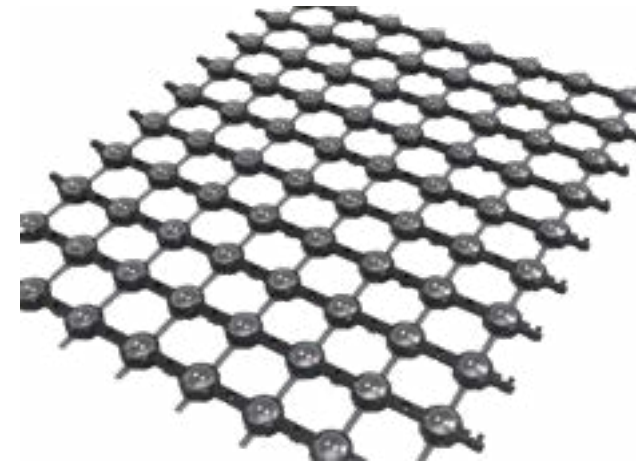

Color Range



Beam Angle




Specifications



Housing Color



Dimensions (in mm)

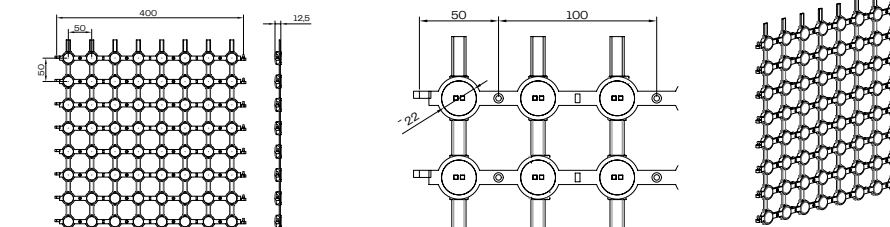

Related Items More available




MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Servers

- i5 Server
- i7 Server
- i9 Server

131

Direct View

100



Flex



181




Scan for full info

Neonflex Side Bend


Key Specs	White	Tunable	RGBW 3000K
Power Consumption (W/m)	12	10	17
LED quantity (per meter)	120	60	60




Color Range




Specifications

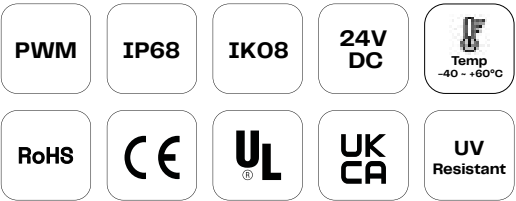

Beam Angle

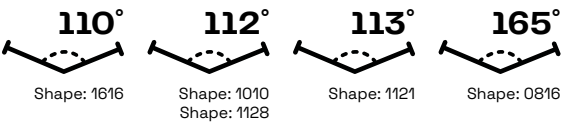

Dimensions (in mm)

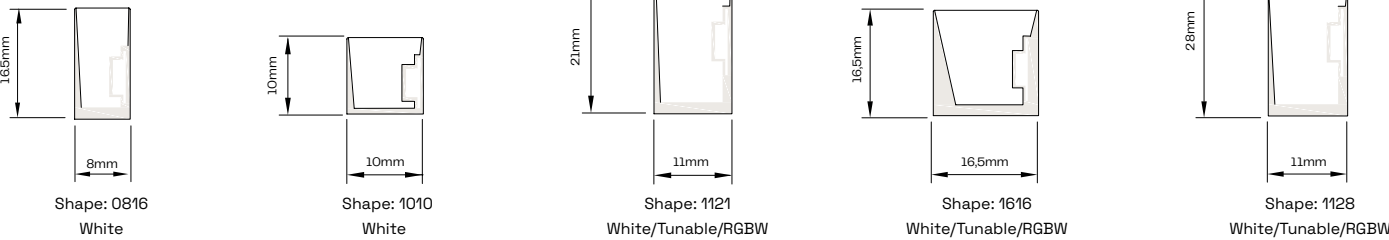

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Drivers

- LM 100 24 G2M2
- LM 100 24 G2D2
- LM 100 24 G2A2



Mounting

- Profile Straight
- Neonflex Profile
- Mounting clip



181




Scan for full info

Neonflex Top Bend


Key Specs	White	Tunable	RGBW 3000K
Power Consumption (W/m)	12	10	17
LED quantity (per meter)	120	60	60




Color Range




Specifications

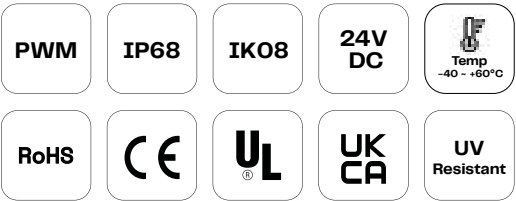

Beam Angle



Dimensions (In mm)

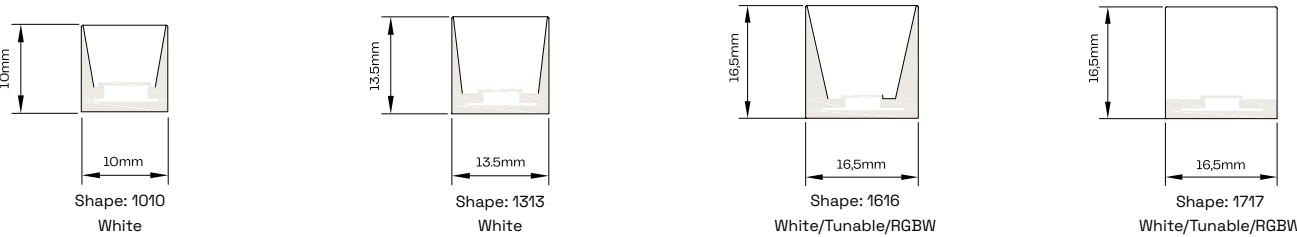

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Drivers

- LM 100 24 G2M2
- LM 100 24 G2D2
- LM 100 24 G2A2



Mounting


- Profile Straight
- Neonflex Profile
- Mounting clip



Scan for full info

DiGi Neonflex Side Bend

Key Specs	Tunable	RGBW 3000K
Power Consumption (W/m)	10	18
LED quantity (per meter)	70	70
Pixels (per meter)	10	10

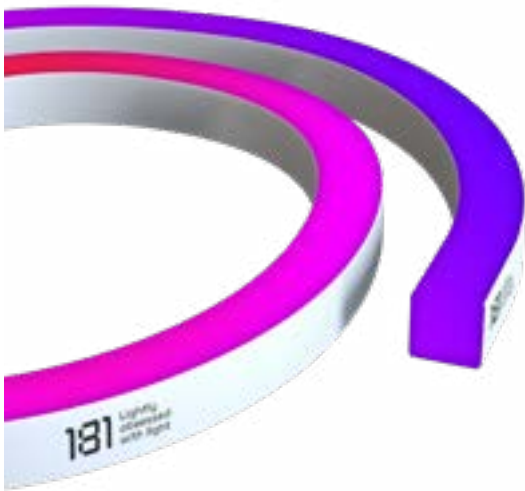


Color Range




Specifications



Beam Angle




Dimensions (in mm)




Shape: 1616

Tunable/RGBW



Shape: 1121

Tunable/RGBW



Shape: 1128

Tunable/RGBW

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Mounting


- Profile Straight
- Neonflex Profile
- Mounting clip



Scan for full info

DiGi Neonflex Top Bend


Key Specs	Tunable	RGBW 3000K
Power Consumption (W/m)	10	18
LED quantity (per meter)	120	70
Pixels (per meter)	10	10

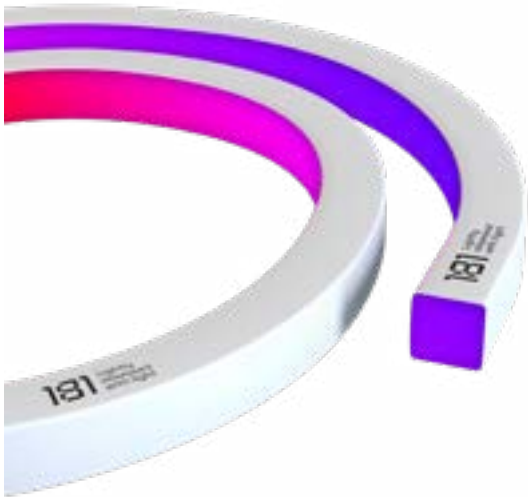


Color Range




Specifications

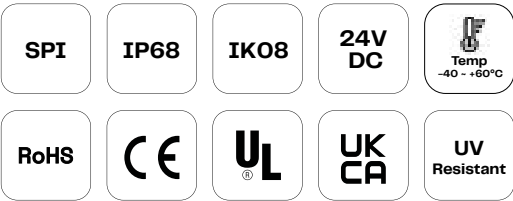

Beam Angle




Dimensions (In mm)




Shape 1313

Tunable/RGBW




Shape 1616

Tunable/RGBW



Shape 1717

Tunable/RGBW



Shape 3027

Tunable/RGBW

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit




Mounting

- Profile Straight
- Neonflex Profile
- Mounting clip

131

Projectors & Linears

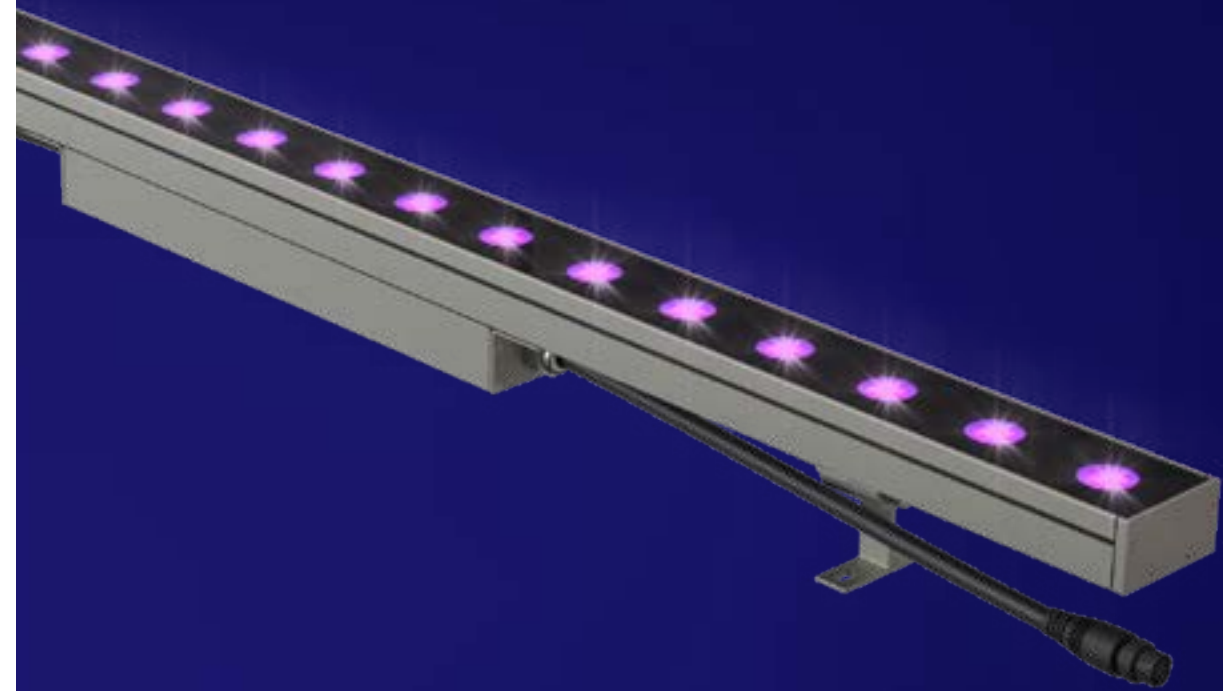

Washing & Grazing

110



181



Scan for full info

Linear Soft Line

Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	24	24
Luminous Flux (cd)	1526	751
LED quantity (per meter)	80	80
CRI	≥80	≥80




Color Range



Beam Angle




Specifications

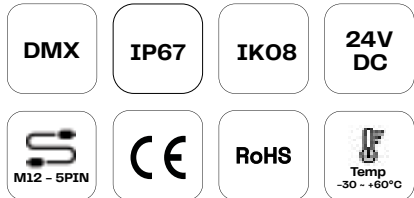

Housing Color



Dimensions (In mm)

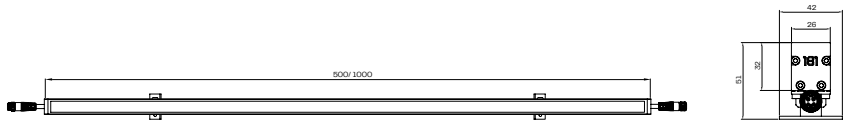

Related Items More available



M12 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 50 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver



Linear Window

Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	12	12
Luminous Flux (cd)	341	309
LED quantity (per fixture)	10	10
CRI	≥80	≥80




Color Range



Beam Angle




Specifications

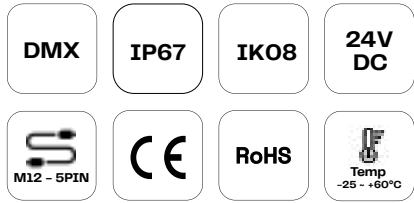

Housing Color



Dimensions (In mm)

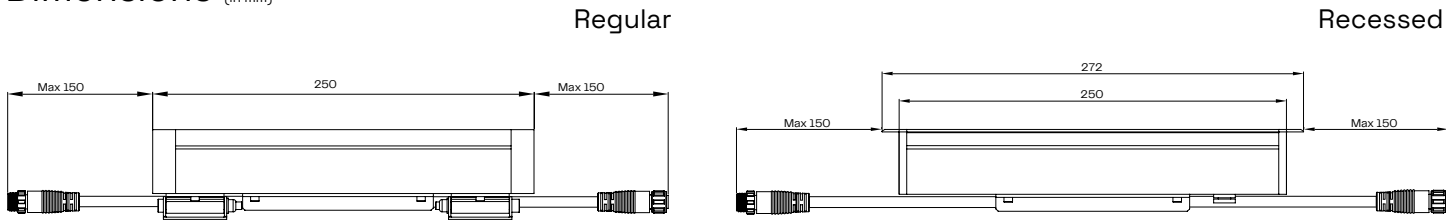

Related Items More available



M12 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell XLG 75 24
- Meanwell HLG 150 24
- Meanwell HLG 320 24



DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver



181



Scan for full info

Linear Flex


Key Specs	White	RGBW 3000K
Power Consumption (W/m)	32	32
LED quantity (per meter)	32	32
LEDs per pixel	4	4
Pixels (per meter)	8	8




Color Range



Beam Angle




Specifications

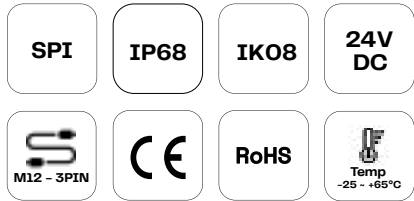

Housing Color



Dimensions (In mm)

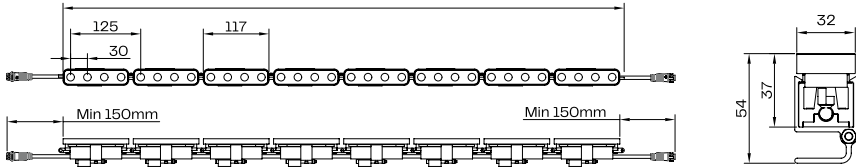

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit




Power Supply

- Meanwell HLG 50 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver

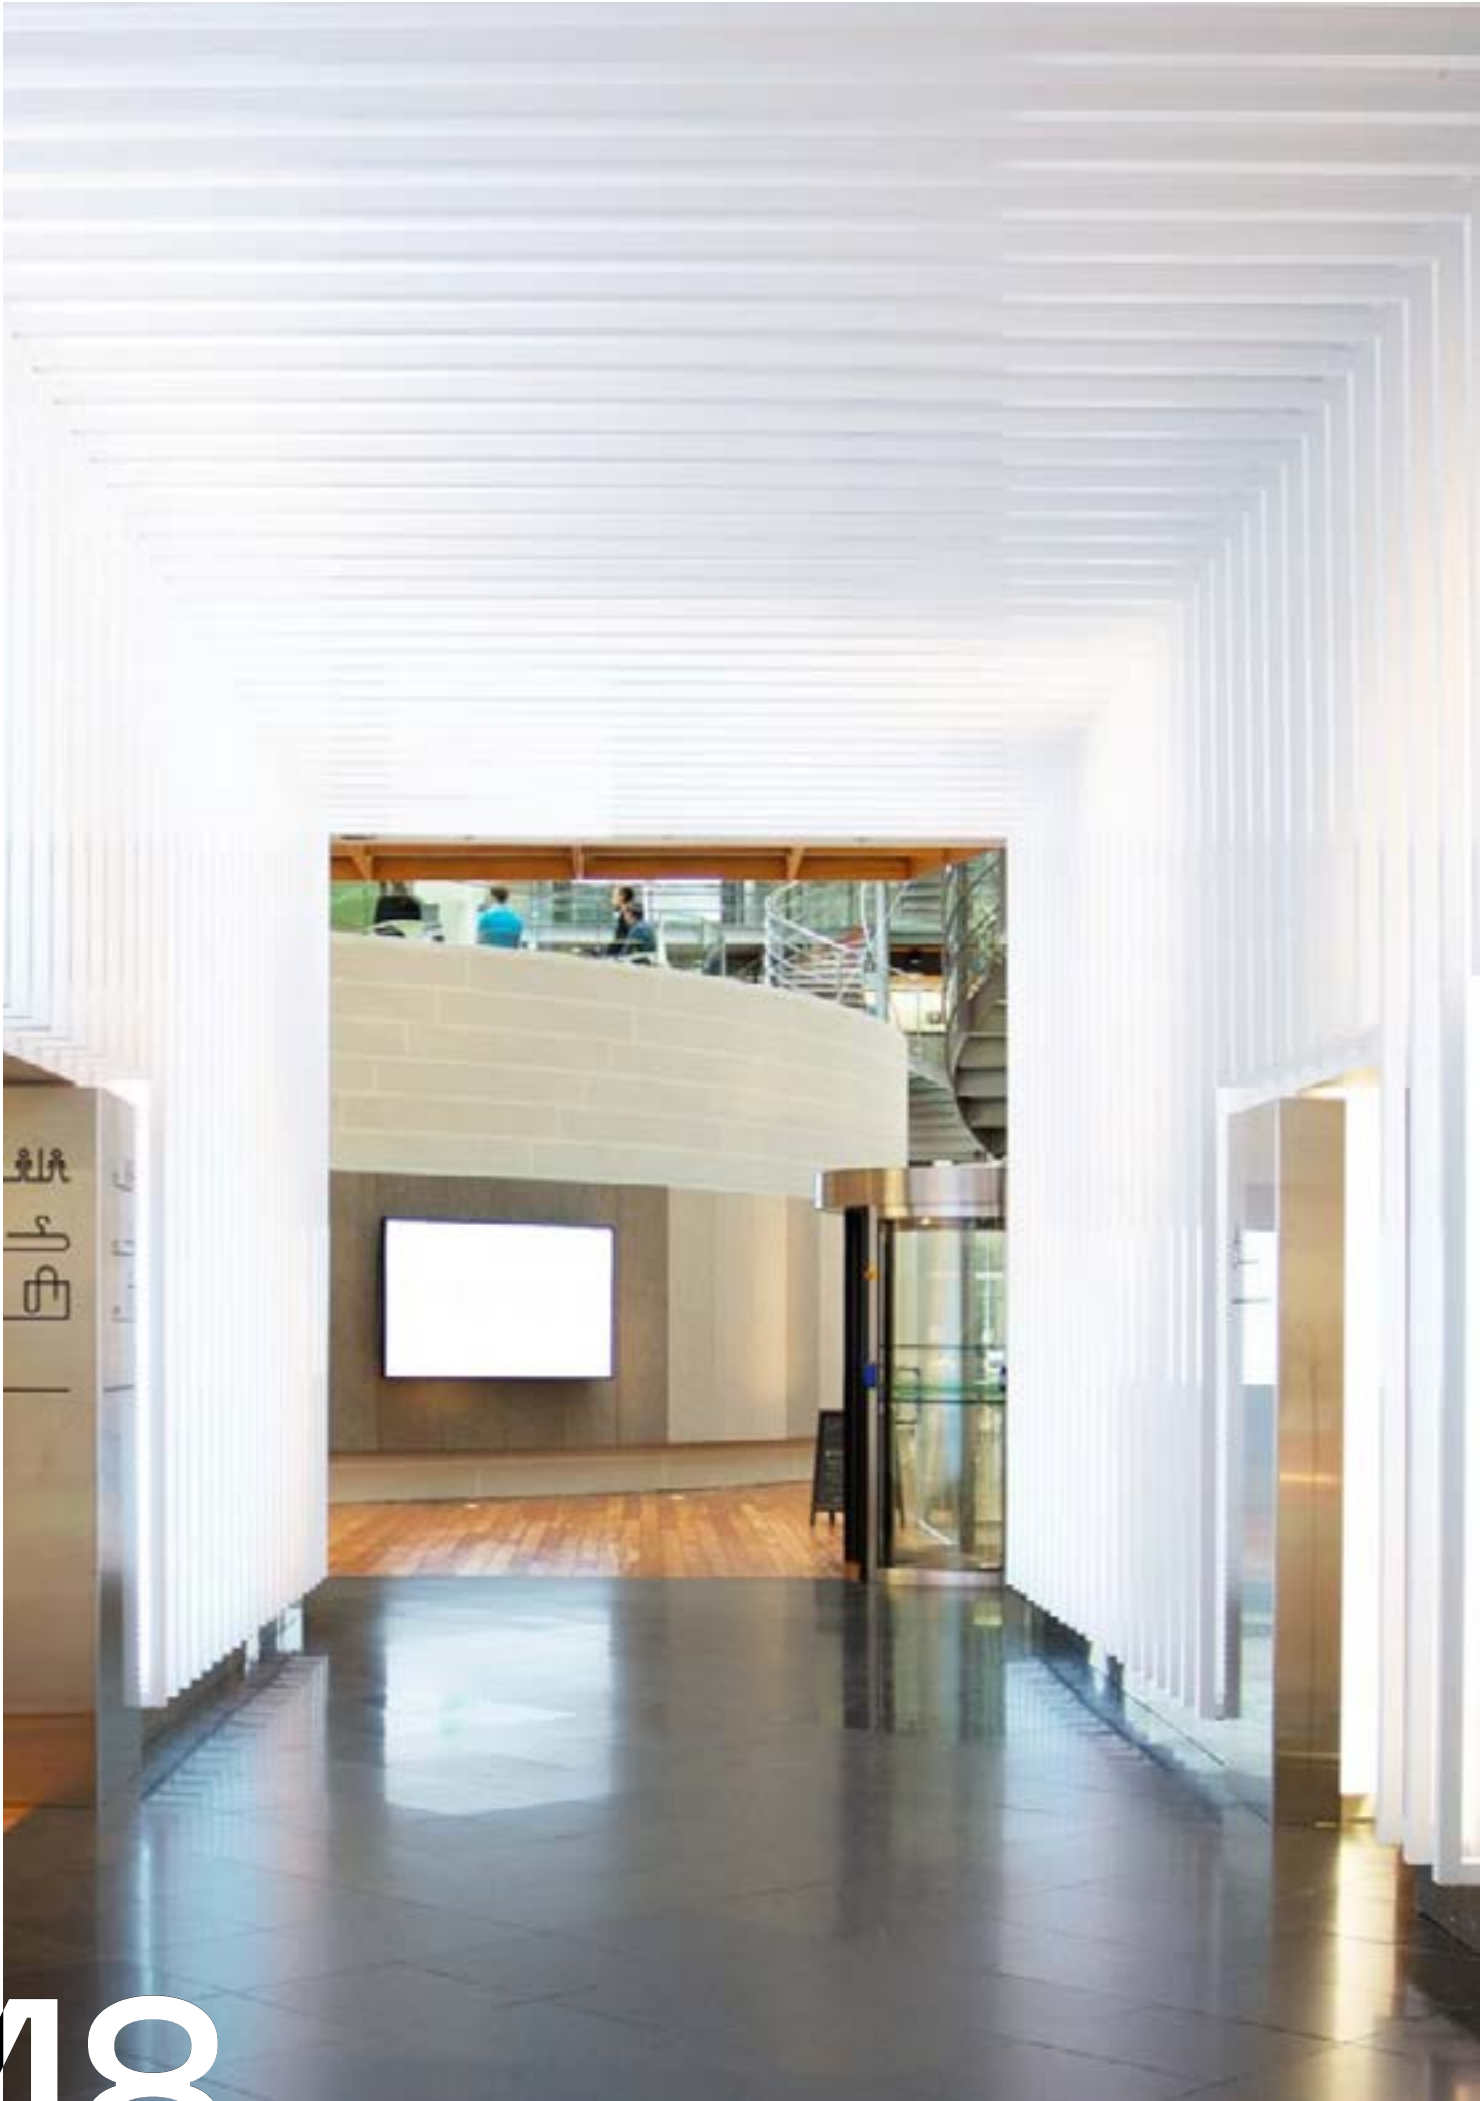

181




Scan for full info

Linear G18


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	18	18
Luminous Flux (cd)	1630	683
LED quantity (per fixture)	48	48




Color Range



Beam Angle



Specifications

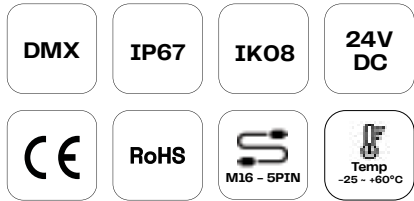

Housing Color



Dimensions (in mm)



Related Items More available



M16 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



131




Scan for full info

Linear G24


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	24	24
Luminous Flux (cd)	2240	1025
LED quantity (per fixture)	24	18




Color Range



Beam Angle




Specifications

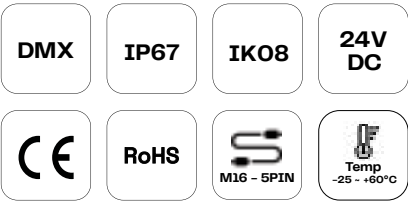

Housing Color



Dimensions (in mm)

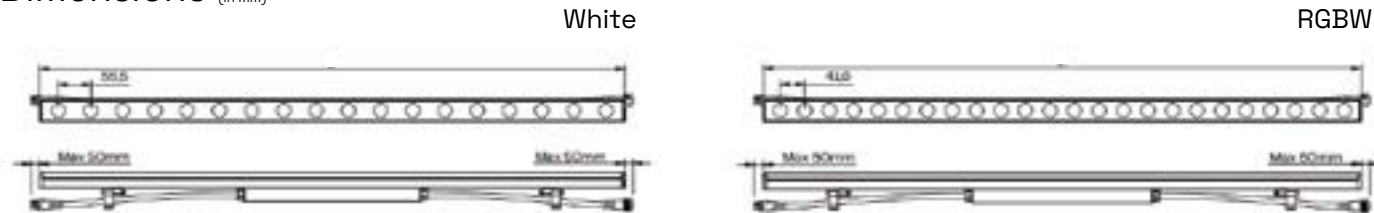

Related Items More available



M16 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

120

121



181



Scan for full info

Linear G36

Key Specs	3000K	Tunable	RGBW 3000K
Power Consumption (W/m)	36	36	36
Luminous Flux (cd)	3011	3086	1470
LED quantity (per fixture)	36	36	18




Color Range



Beam Angle





Specifications

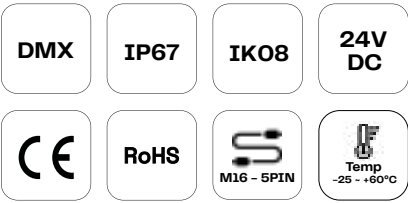

Housing Color



Dimensions (In mm)

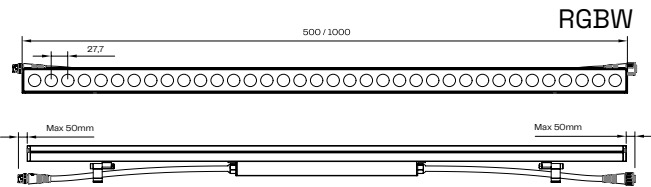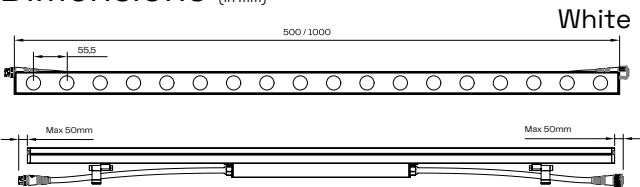

Related Items More available



M16 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24




MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

122

123

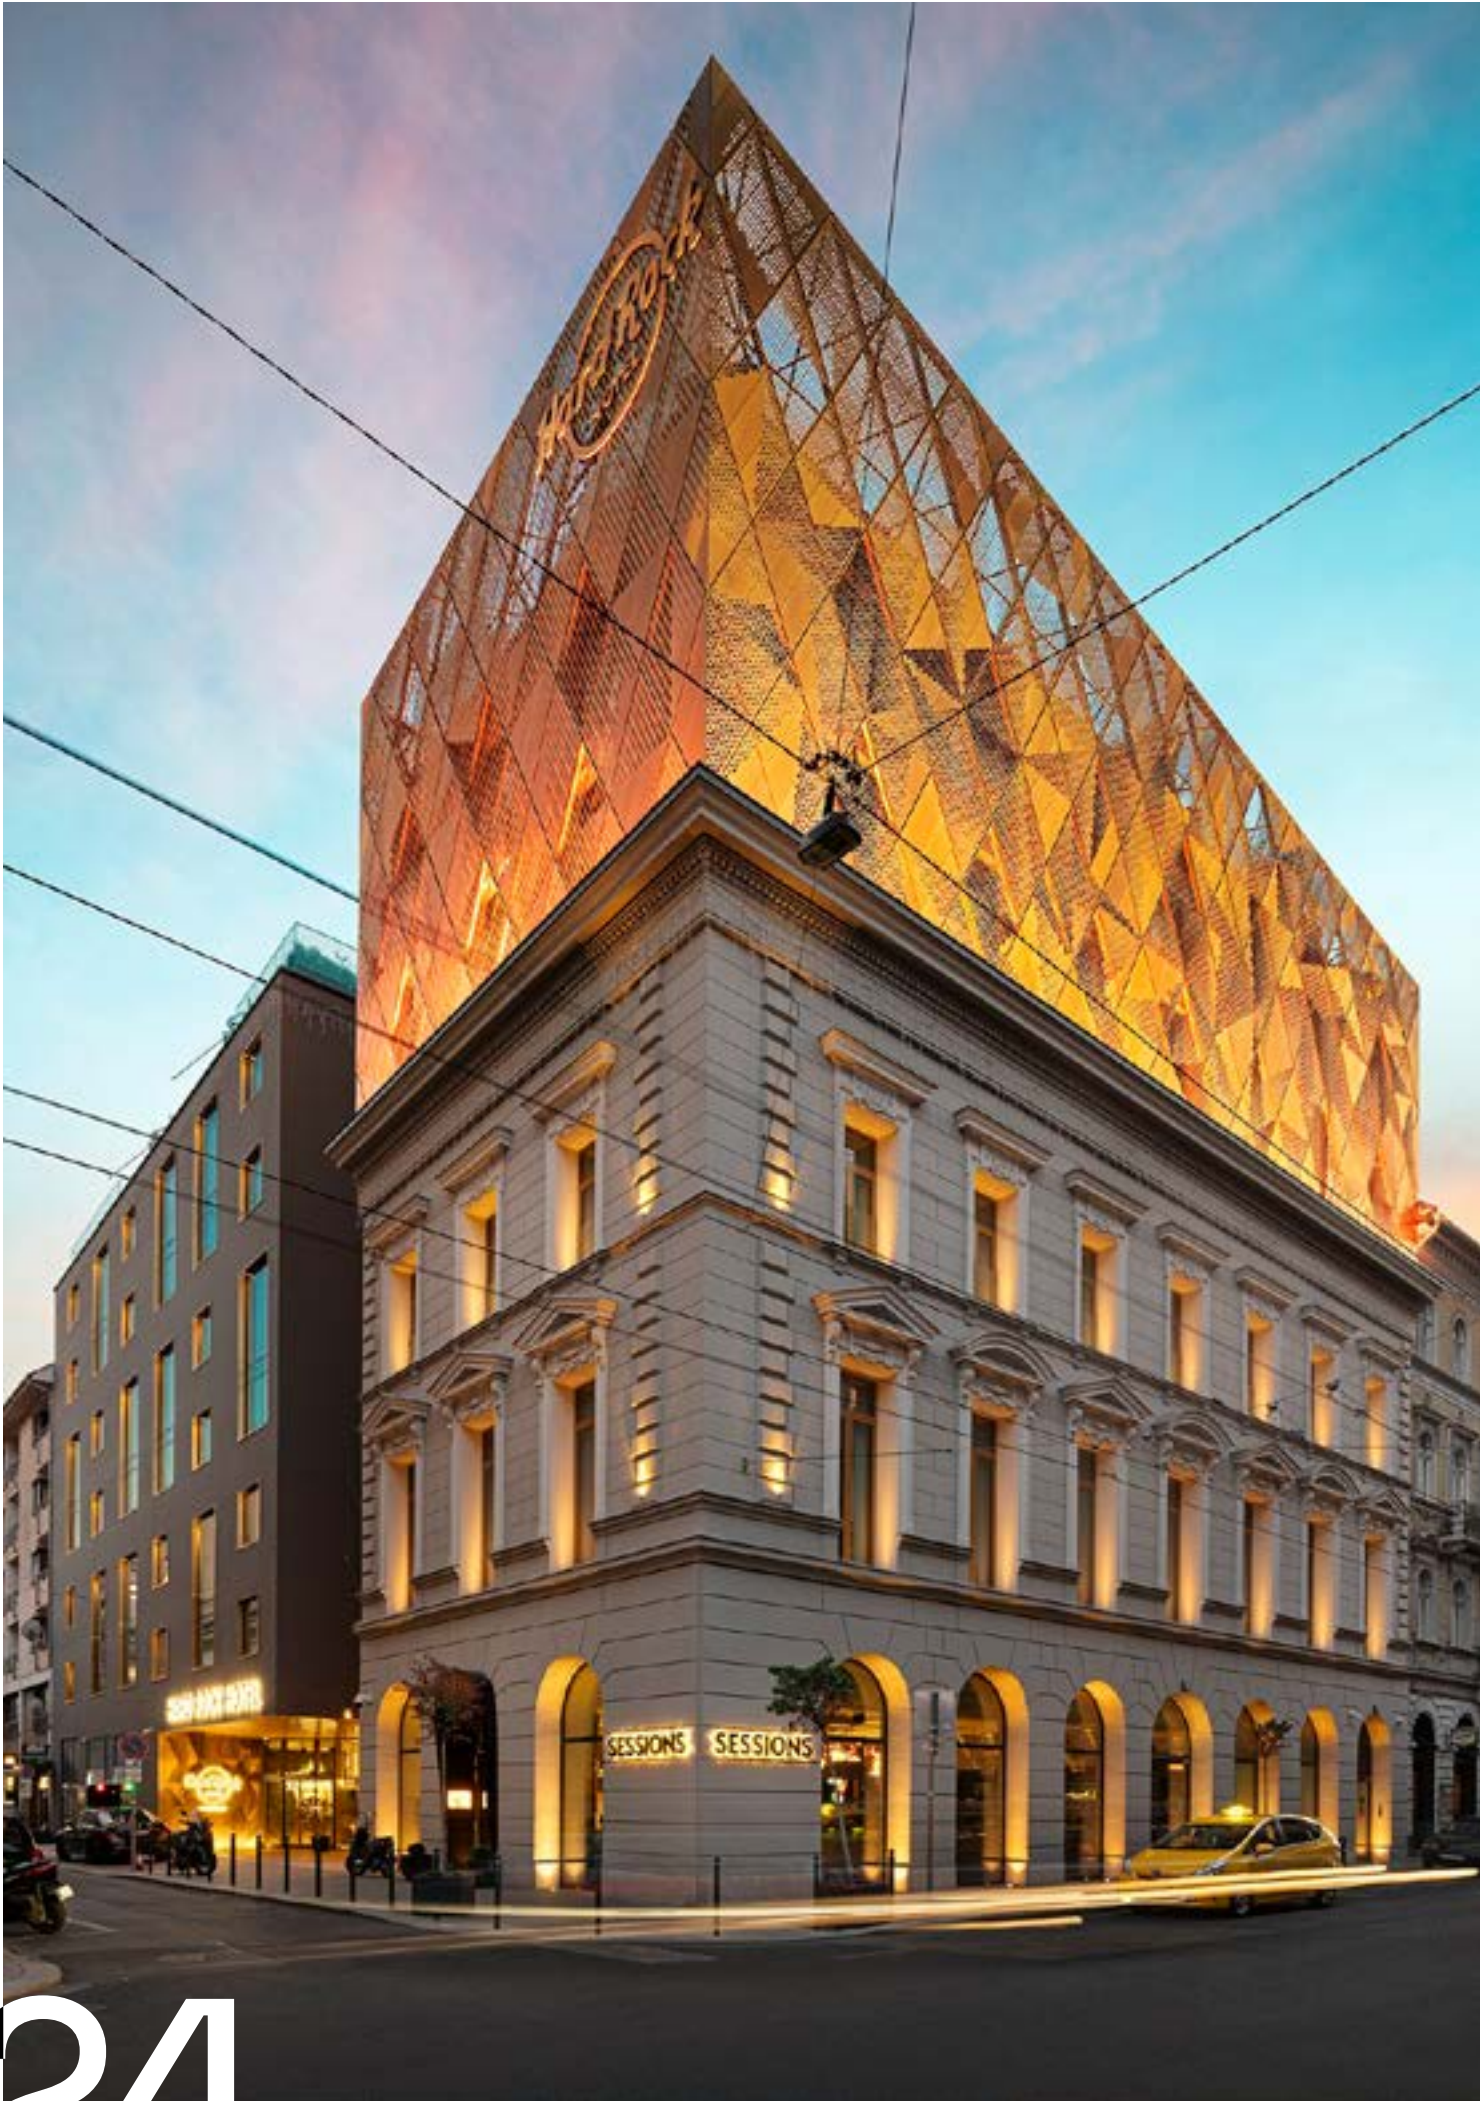

181



Scan for full info

Linear G54

Key Specs	3000K	Tunable	RGBW 3000K
Power Consumption (W/m)	54	54	54
Luminous Flux (cd)	4517	4650	2217
LED quantity (per fixture)	36	36	36




Color Range



Beam Angle




Specifications

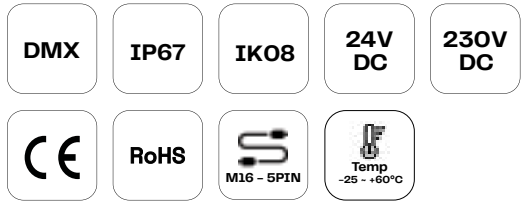

Housing Color



Dimensions (in mm)

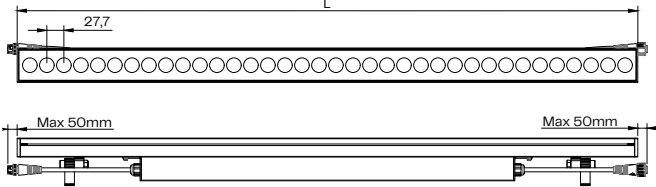

Related Items More available



M16 Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



131



Scan for full info

Linear G100


Key Specs	3000K	Tunable	RGBW 3000K
Power Consumption (W/m)	100	100	100
Luminous Flux (cd)	7227	6940	4428
LED quantity (per fixture)	24	24	24




Color Range



Beam Angle





Specifications

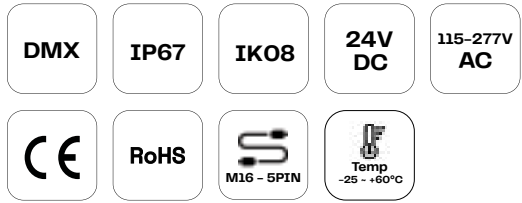


Housing Color



Dimensions (In mm)

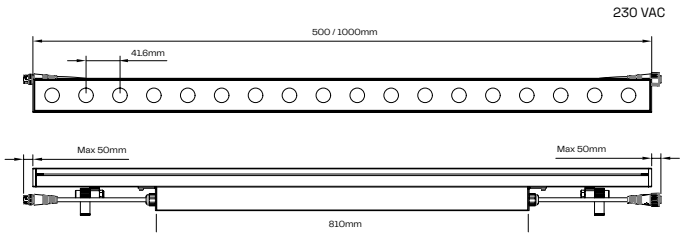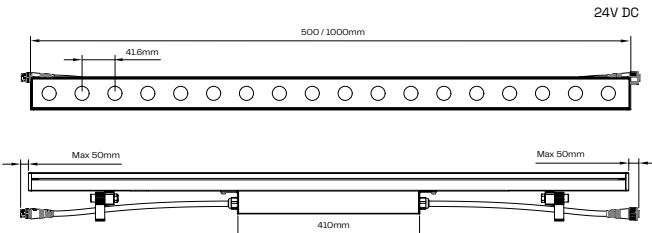

Related Items More available






131



Scan for full info

Linear inground


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	54	54
Luminous Flux (cd)	3272	2217
LED quantity (per meter)	24	24

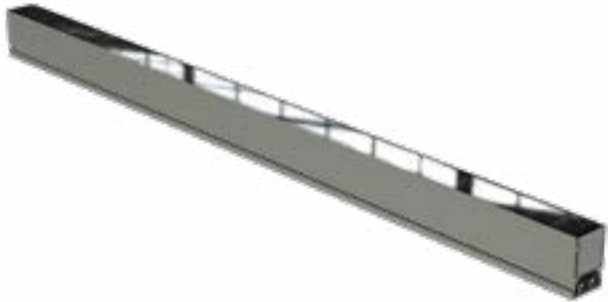


Color Range



Beam Angle



Specifications

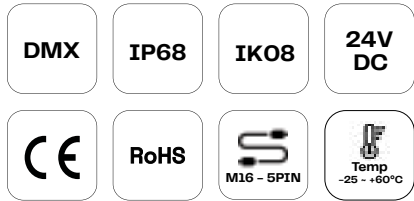

Housing Color



Dimensions (in mm)



Related Items More available



M16 Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell XLG 75 24
- Meanwell XLG 100 24
- Meanwell HLG 150 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



131



Scan for full info

Linear inground flex


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	54	54
Luminous Flux (cd)	3272	2217
LED quantity (per meter)	24	24




Color Range



Beam Angle




Specifications

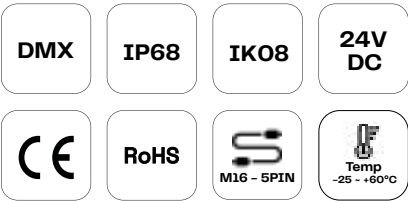

Housing Color



Dimensions (in mm)



Related Items More available



M16 Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell XLG 75 24
- Meanwell XLG 100 24
- Meanwell HLG 150 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



131




Scan for full info

Linear Flex Silicon

Key Specs

Power Consumption (W/m)	18
LED quantity (per meter)	24
Luminous Flux (cd)	1044

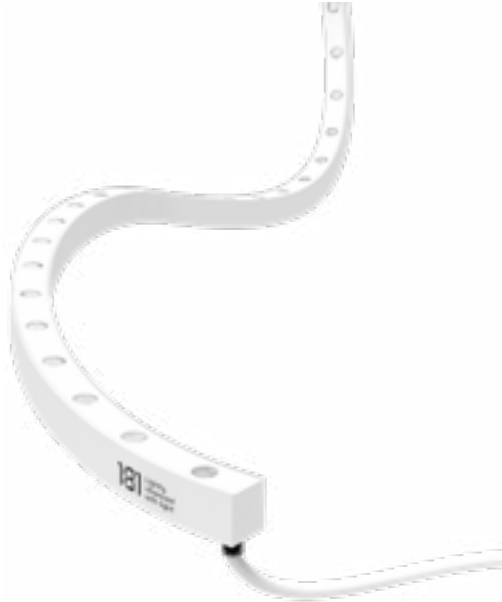


Color Range




Beam Angle






Specifications

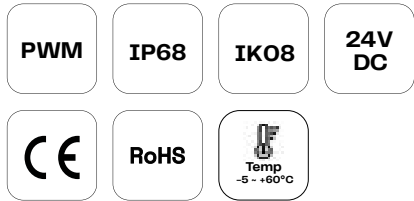

Housing Color



Dimensions (in mm)

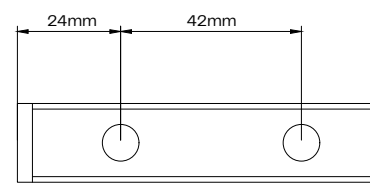

Related Items More available



132

133



131




Scan for full info

DiGi Linear Flex Silicon

Key Specs


Power Consumption (W/m)	23
LED quantity (per meter)	24
Pixels (per meter)	4
Luminous Flux (cd)	832

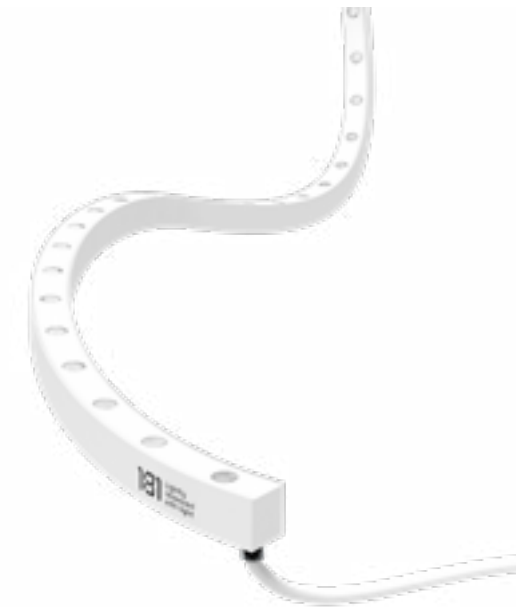


Color Range



Beam Angle






Specifications

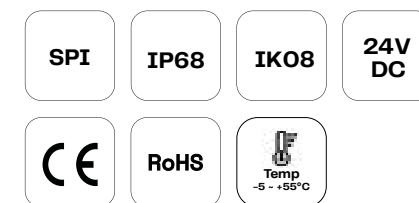




Housing Color



Dimensions (in mm)

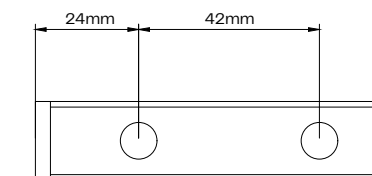

Related Items More available



134

135


131

Projectors & Linears

136

Beams



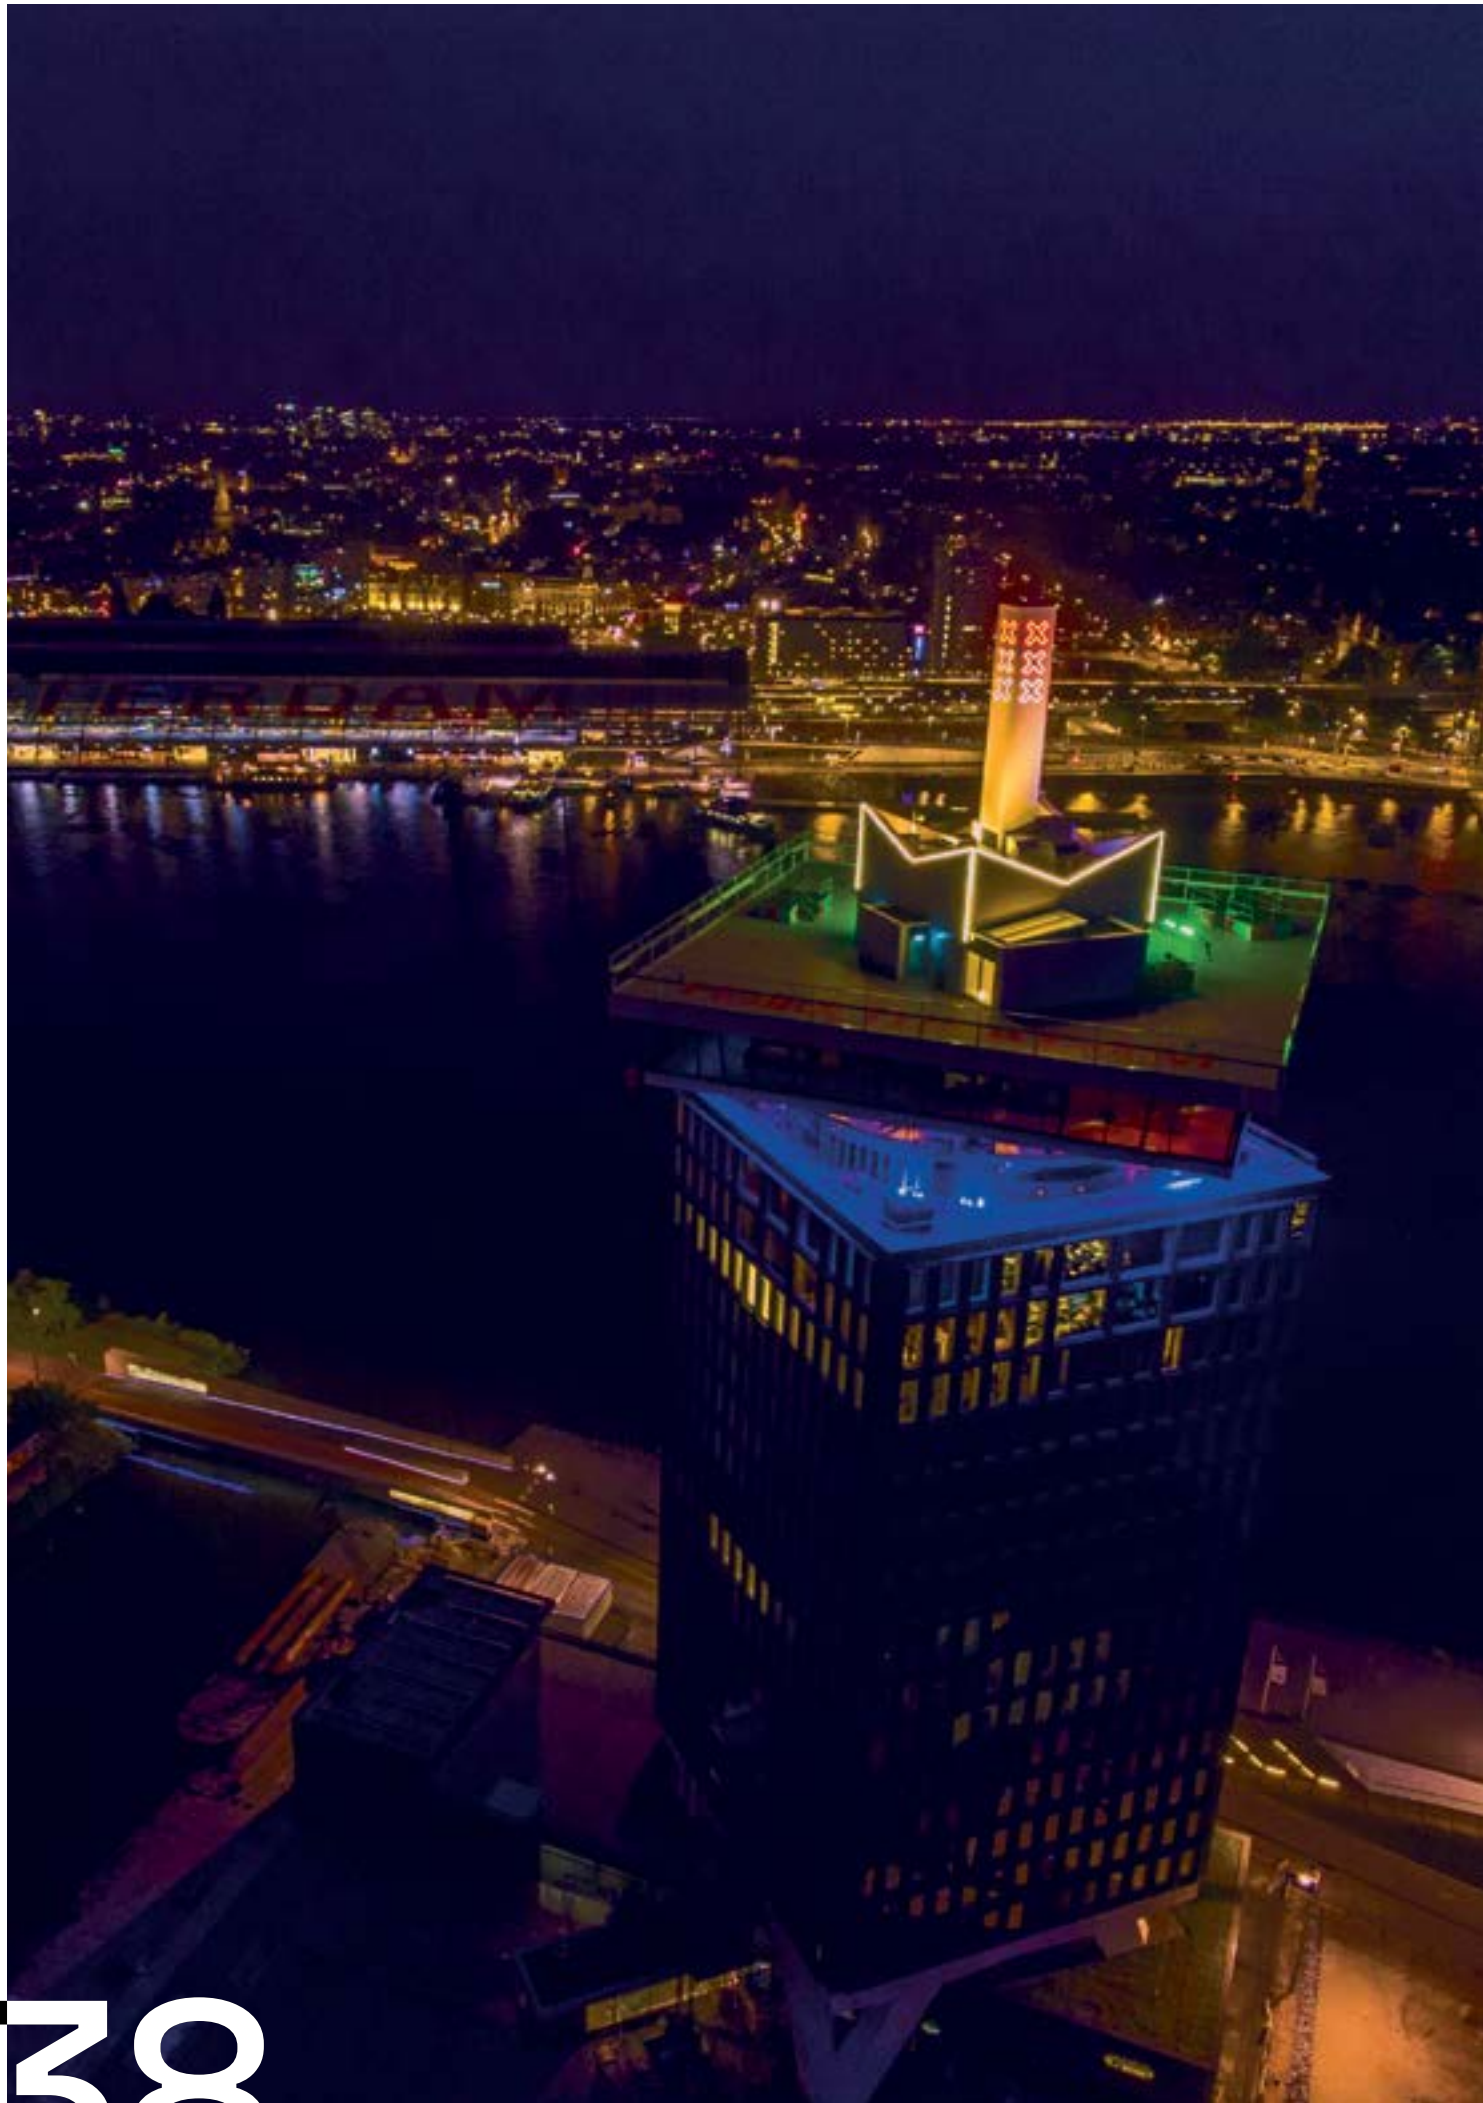

Scan for full info

Beam F12


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	12	12
Luminous Flux (cd)	1060	680
LEDs (per fixture)	6	6




Color Range



Beam Angle




Specifications

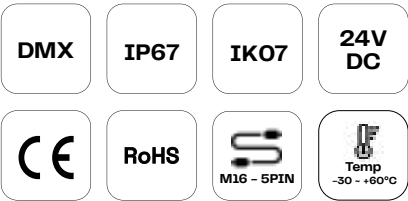

Housing Color



Dimensions (In mm)



Beam 12W

Related Items More available

MADRIX

➤

MADRIX Nebula

➤

MADRIX Software

➤

MADRIX Key

DiGidot PxLNet Node

➤

PxLNet Node U48

➤

PxLNet Node U96

➤

PxLNet Transceiver

Power Supply

➤

Meanwell HLG 150 24

➤

Meanwell HLG 240 24

➤

Meanwell HLG 320 24

M16 Cables

➤

Extension cable

➤

Input Cable

➤

Data Link Cable



131



Scan for full info

Beam F36


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	36	36
Luminous Flux (cd)	3182	2045
LEDs (per fixture)	24	24




Color Range



Beam Angle




Specifications

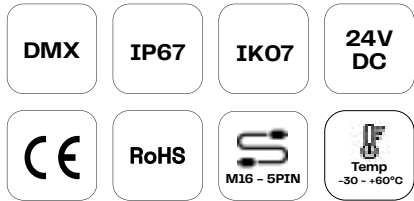

Housing Color



Dimensions (In mm)



Beam 36W

Related Items More available

MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

DiGidot PxLNet Node


- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver

Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24

M16 Cables

- Extension cable
- Input Cable
- Data Link Cable

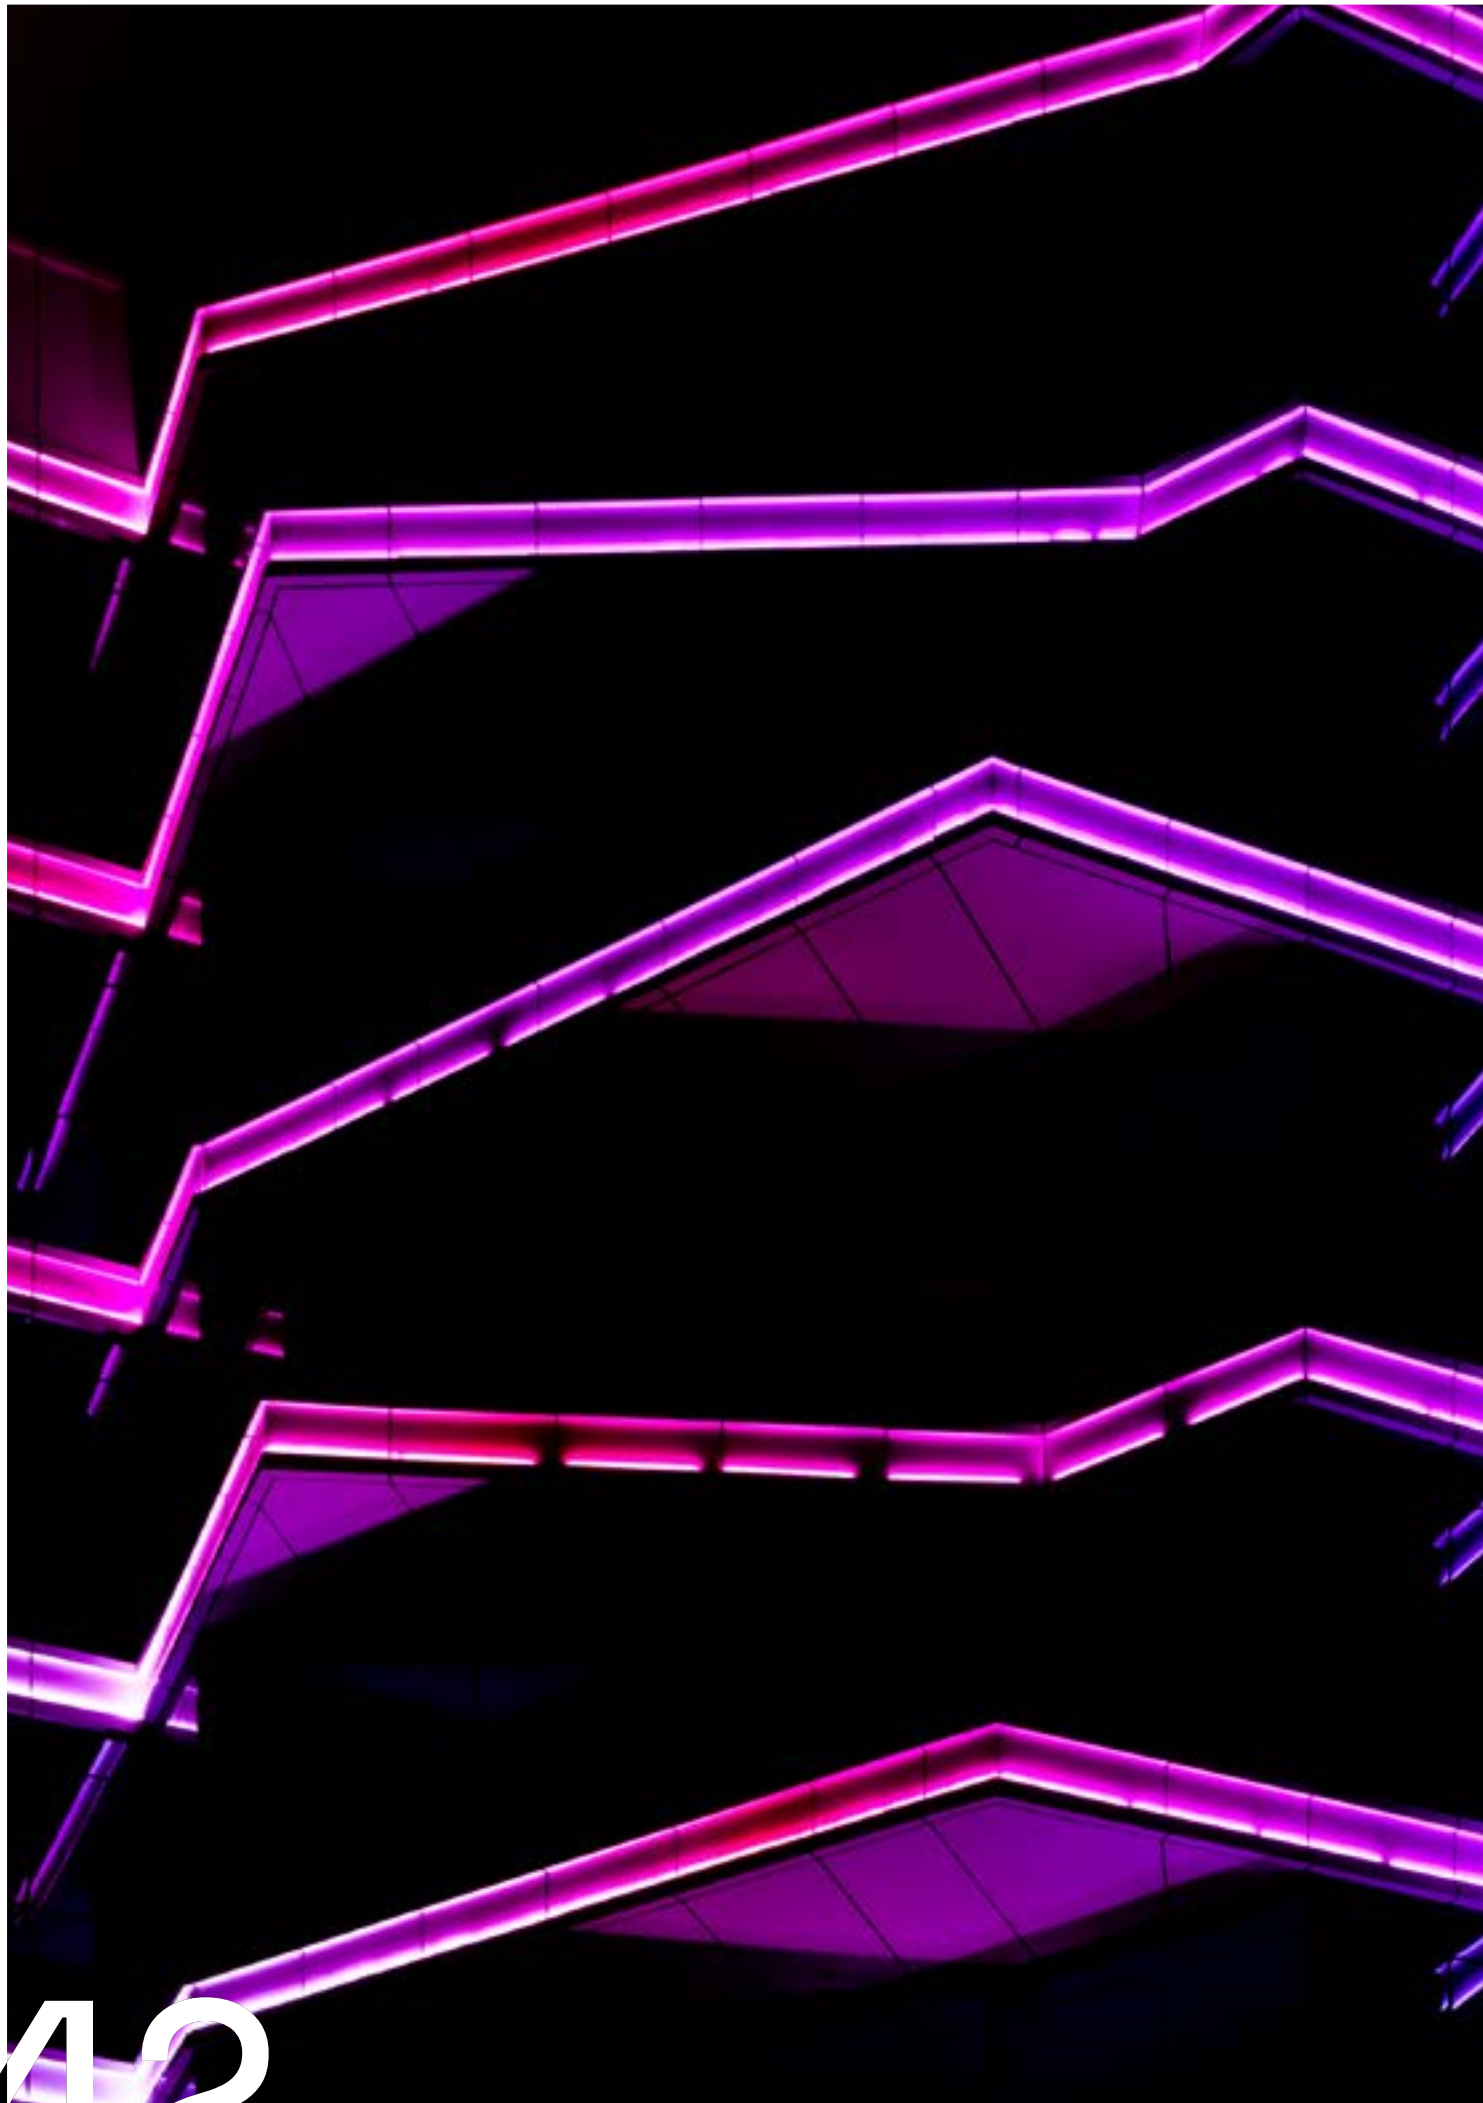

131



Scan for full info

Beam F54


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	54	54
Luminous Flux (cd)	4883	2961
LEDs (per fixture)	24	24




Color Range



Beam Angle




Specifications

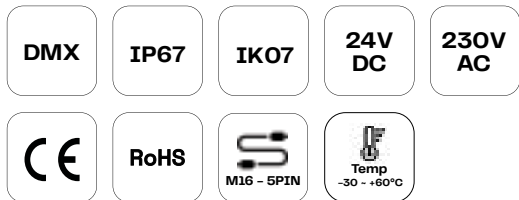

Housing Color



Dimensions (In mm)



Beam 54W

Related Items More available

MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver

Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24

M16 Cables

- Extension cable
- Input Cable
- Data Link Cable

142

143



131



Scan for full info

Beam F72


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	72	72
Luminous Flux (cd)	5740	3607
LEDs (per fixture)	36	36




Color Range



Beam Angle




Specifications

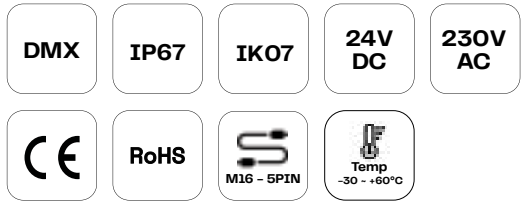

Housing Color



Dimensions (In mm)



Beam 54W

Related Items More available

MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver

Power Supply

- Meanwell XLG 75 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24

M16 Cables

- Extension cable
- Input Cable
- Data Link Cable

144

145



131



Scan for full info

Beam F120


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	120	120
Luminous Flux (cd)	11436	7148
LEDs (per fixture)	48	48




Color Range



Beam Angle




Specifications

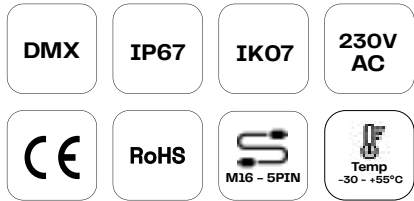

Housing Color



Dimensions (In mm)



Related Items More available

MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver

DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit

M16 Cables

- Extension cable
- Input Cable
- Data Link Cable



Scan for full info

Beam F250


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	250	250
Luminous Flux (cd)	23828	14893
LEDs (per fixture)	120	120




Color Range



Beam Angle




Specifications

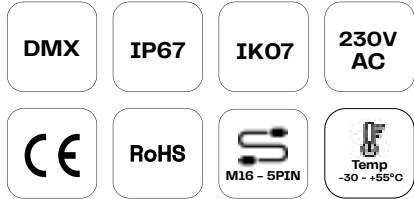

Housing Color



Dimensions (in mm)



Related Items More available

MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver


DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit

M16 Cables

- Extension cable
- Input Cable
- Data Link Cable

MADRIX LIGHTING CONTROL

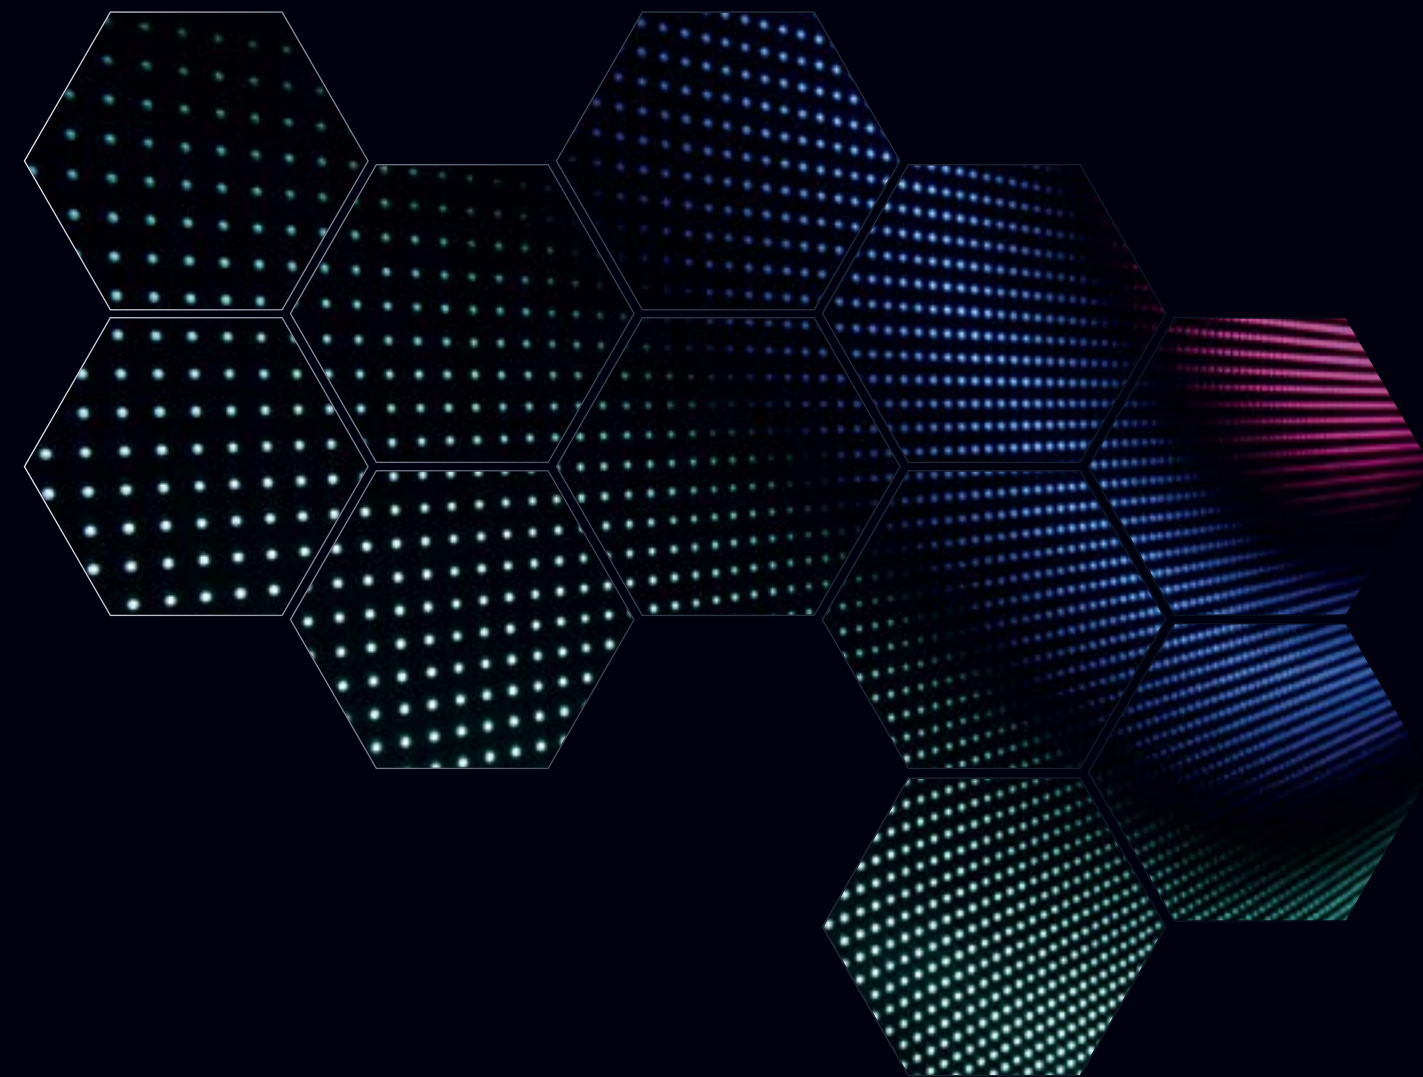

Discover extraordinary lighting and reliable control.

Dynamic visuals, colorful effects, or static elegance —
A creative vision and stunning lighting design ultimately require the right solutions.

The MADRIX® range of software and hardware solutions includes state-of-the-art tools for easy configuration, automatic health monitoring, and creative lighting control.

All around the world amazing LED projects are brought to life in entertainment, live productions, and architainment thanks to high-quality, professional products made in Germany.

CREATIVE • DYNAMIC • RELIABLE



MADRIX® 5 is the ultimate control tool for your LED lighting. Use pixel mapping at its best in 2D or 3D.

An award-winning software, and so much more. It is a tool for generative visuals and effects, and leading LED-lighting controller since 2005.

It makes your stunning LED-lighting designs possible.




 Made in Germany

www.madrix.nl

DiGidot App and Web environment

The DiGidot App allows you to easily control and customize your LED installations from your mobile device, giving you complete flexibility and convenience in managing your lighting projects. With its intuitive interface and powerful features, the DiGidot App is the perfect tool for creating stunning visual experiences with your LED installations.

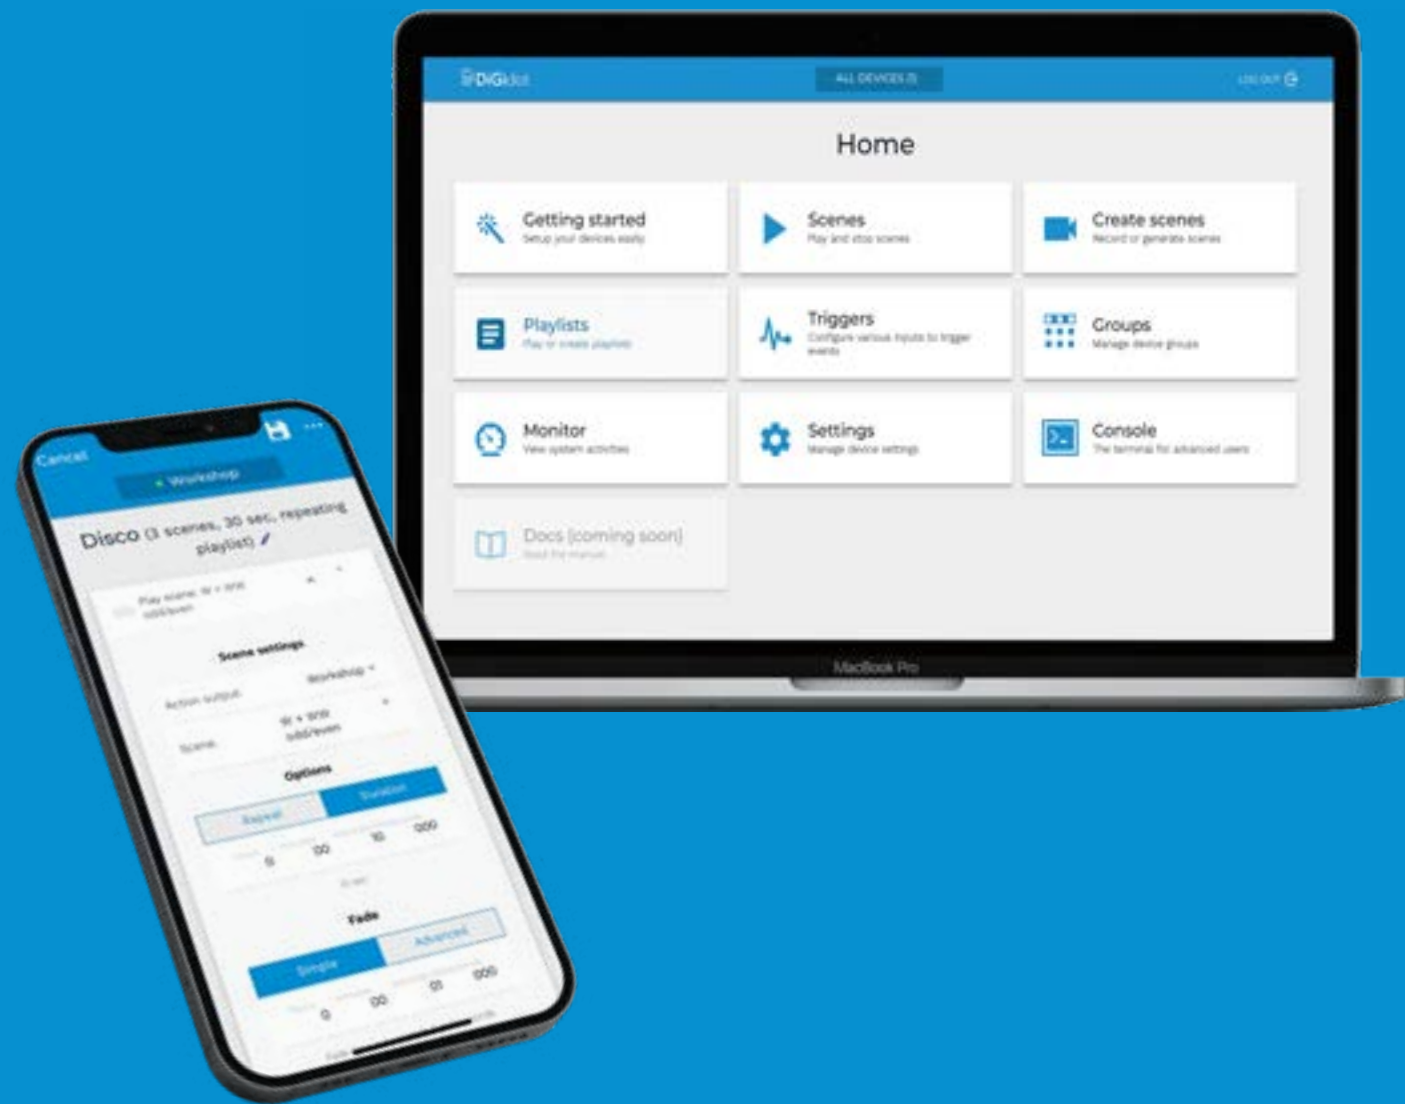

All in one



Innovative

Pixelating surfaces, beyond just color and brightness control.

Reliable

Hardware for 24/7 use, upgradable components for enhanced maintenance.

Versatile

Easy scalability, from small-scale events to large-scale installations.

Industry standards

Compatible with a range of industry standards, including large range of industry standards such as DMX, Art-Net and sACN.

Easy to use

Intuitive interface, plug-and-play setup and remote management. Easy to set up, control, and manage.

Dedicated team

Extensive technical support from embedded developers in the Netherlands

Always up-to-date

Free online or offline firmware updates.

Full solution for pixel controlled projects

Hardware

DiGidot C4 Live with NFC
DiGidot C4 Extended with NFC
DiGidot PxLNet Node
PxLNet Extenders
PxLNet Smart Receiver
PxLNet Smart Receiver Din-rail [Coming soon](#)
PxLNet PowerNode [Coming soon](#)

Software

DiGidot web interface
DiGidot app
Upgrades
Updates

Cloud

DiGidot Connect (IoT Bridge) [Coming soon](#)

What is DiGidot?

 **DiGidot**
PUSHING CONTROL BOUNDARIES



Amsterdam Office

+31 (0) 20 82 00 170
sales@oneeightyone.com

Bromostraat 18
1067 TG Amsterdam
The Netherlands

Dubai Office

+97 1 5 05 87 00 99
dubai@oneeightyone.com

Jumeirah Bay X3, Office 1005
JLT Cluster X
Dubai, United Arab Emirates