

Intelligent LED Driver

- Dimming interface: 0-10V (1-10V/10V PWM/RX)
- T-PWM dimming technology allows continuous and flicker-free images under high-speed photography.
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- Automatically recognize 0-10V and 1-10V input signal.
- DIP switch fast multi gear current selection
- Dimming from 0~100%, down to 0.1%.
- The whole dimming process is flicker-free with high frequency exemption level.
- Ultra-low consumption of 0-10V ports < 0.05mA.
- Innovative thermal management technology intelligently protects the life of the LED driver.
- Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for Class I / II / III indoor light fixtures.
- Up to 50,000-hour life time.
- 5-year warranty (Rubycon capacitor).

4 in1 dimming
0-10V
1-10V
10V PWM
RX

T-PWM
Dimming Technology

Flicker Free
IEEE 1789

Dimmable:
1: 10000



The certification icon represents on-going certification applications only, and final certification qualification is subject to actual products.



Technical Specs

Model		SE-12-100-450-W2A		
Features	Output Type	Constant Current		
	Dimming Interface	0-10V(1-10V/10V PWM/RX)		
	Output Feature	Isolation		
	Protection Grade	IP20		
	Insulation Grade	Class II (Suitable for class I/ II /III light fixtures)		
OUTPUT	Maximum output voltage	≤48Vdc		
	Output Voltage	9-42Vdc		
	Output Current Range	100-450mA		
	Output Power Range	0.9W-12W		
	Dimming Range	0~100%, down to 0.01%		
	Ripple Current	<3%(Maximum current non dimming state)		
	Current Accuracy	±5%		
	PWM Frequency	≤3600Hz		
INPUT	DC Voltage Range	120-300Vdc		
	AC Voltage Range	100-240Vac		
	Rated voltage	115Vac/230Vac		
	Frequency	50/60Hz		
	Input Current	≤0.18A/115Vac, at full load ≤0.08A/230Vac, at full load		
	Power transmission	Max.16W		
	Power Factor	PF>0.95/115Vac, at full load PF>0.9C/230Vac, at full load		
	Efficiency (Typ.)	82%, at full load		
	Inrush Current	Cold start 15A(Test twidth=102us tested under 50% Ipeak)/230Vac		
		Anti Surge	L-N: 2KV	
	Leakage Current	<0.5mA/230Vac		
ENVIRONMENT	Working Temperature	ta: -20 ~ 50°C tc: 80°C		
	Working Humidity	20 ~ 95%RH, non-condensing		
	Storage Temperature/Humidity	-40 ~ 80°C, 10 ~ 95%RH		
	Temperature Coefficient	±0.03%/°C (-20°C ~ 50°C)		
	Vibration	10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively		
PROTECTION	Overload Protection	Shut down the output and recover automatically once it exceeds 1.02-1.35 times of the rated power		
	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output		
	Short Circuit Protection	When short circuit occurs, shut down the output and recover automatically		
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac		
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	Safety Standards	CCC	China	GB19510.1, GB19510.14
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493
		CB	European Union	IEC61347-1, IEC61347-2-13
		RCM	Korea	AS/NZS61347.1, AS61347-2-13
		CE	Australia	EN61347-1, EN61347-2-13, EN62493
		KC	Europe	KC61347-1, KC61347-2-13
		UKCA	CB Member States	BS EN61347-1, BS EN61347-2-13, BS EN62493
		ENEC	Russia	EN61347-1, EN61347-2-13, EN62384
		BIS	India	IS 15885(PART 2/SEC 13)
	EMC Emission	EAC	Russia	IEC 61347-1, IEC 61347-2-13
		CCC	China	GB/T17743, GB17625.1
		RCM	Australia	EN IEC 55015, EN IEC 61000-3-2, EN61000-3-3
		UKCA	Europe	BS EN61347-1, BS EN61347-2-13, BS EN62493
		KC	Korea	KS C 9815, KS C 9547
		CE	European Union	EN IEC 55015, EN IEC 61000-3-2, EN61000-3-3
		EAC	Russia	IEC 62493 IEC 61547 EH 55015 IEC 61000-3-2, IEC 61000-3-3
		BIS	India	IS 15885(PART 2/SEC 13)
	EMC Immunity	EN 61000-4-2, 3, 4, 5, 6, 8, 11, EN 61547		
ErP	Power Consumption	Standby power consumption	No standby mode	
		Networked standby	<0.5W	
		No-load power consumption	<0.5W	
	Flicker/Stroboscopic Effect	IEEE 1789	Meet IEEE 1789 standard/High frequency exemption level	
		CIE SVM	Pst LM≤1.0, SVM≤0.4	
	DF	Phase factor	DF≥0.9	
OTHERS	Weight(N.W.)	80±10g		
	Dimensions	110×35×20mm(L×W×H)		

LED Current Selection

DIP switch quickly selects 8-gear current value




SE-12-100-450-W2A	DIP Switch									ON OFF
	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	450mA	
	Output Voltage	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V	9-30V	9-27V	
	Output Power	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W	3.15-11.9W	3.6-12W	4.05-12.15W	

* After setting the current via DIP switches, power off and then power on the driver to make the new current setting effective.


* E.g. LED 3V/pcs: 9-42V can power 3-14pcs LEDs in series, 9-21.5V can power 3-7pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LEDs.

Product Size


Unit: mm

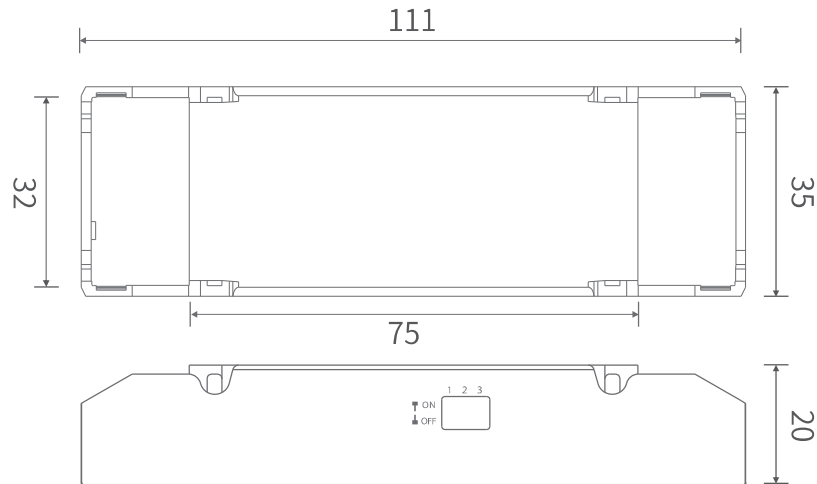



Wiring Diagram

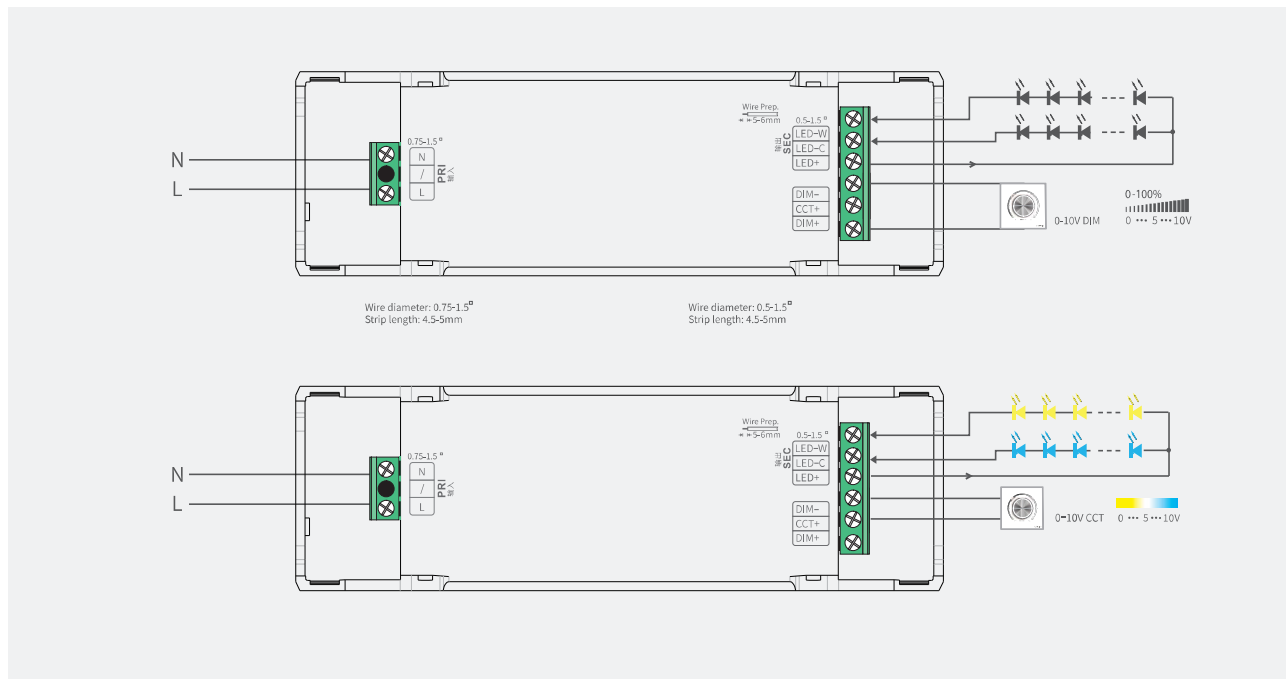


Installation Precautions



Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.




Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.




Relationship Diagrams

SE-12-100-450-W2A


Efficiency VS Load

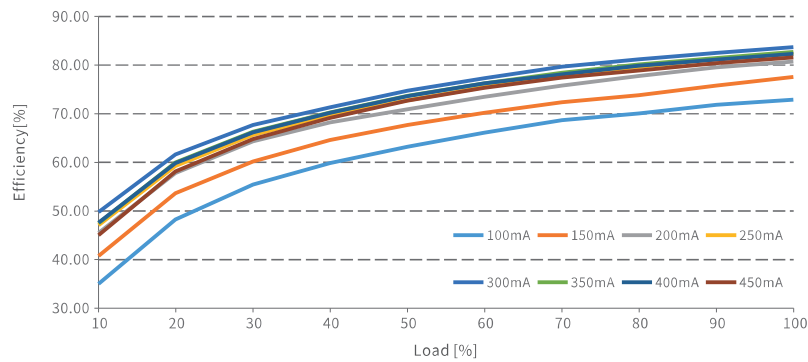


THD VS Load

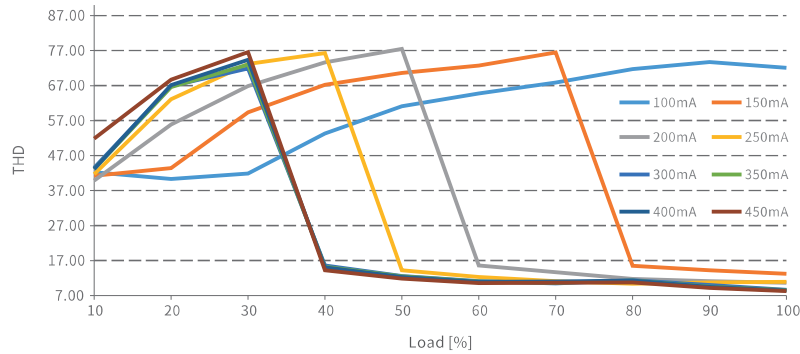

Power Factor VS Load

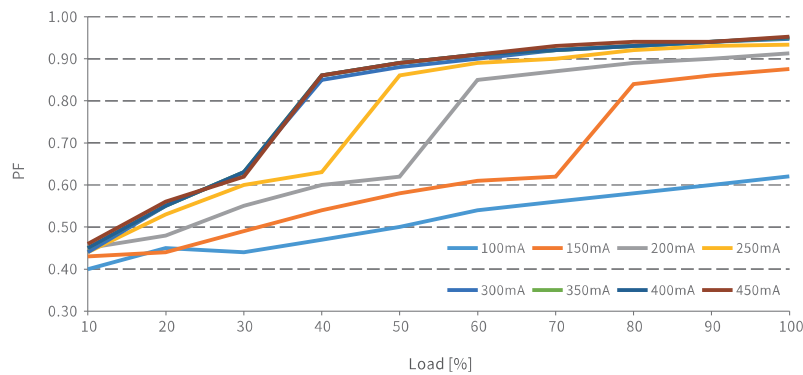

Flicker Test Form

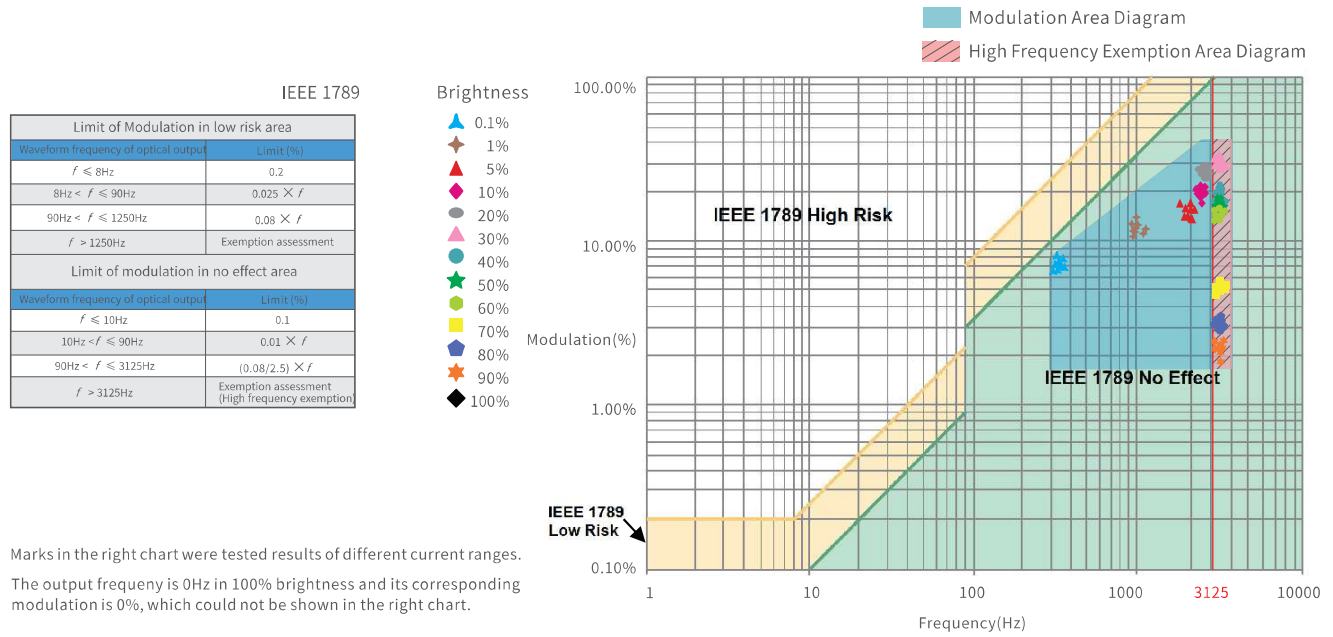

Marks in the right chart were tested results of different current ranges.

The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Packaging Specifications

Model	SE-12-100-450-W2A
Carton Dimensions	260×235×195mm(L×W×H)
Quantity	20 PCS/Layer; 5 Layers/Carton; 100 PCS/Carton
Weight	0.077kg/PC; 15.75kg±5%/Carton

Packaging Image



Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- This product must be installed and adjusted by a qualified professional.
 - This product is non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
 - Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
 - When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
 - Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
 - Please check whether the working voltage used complies with the parameter requirements of the product.
 - Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
 - If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.
- ※ This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2022.12.19	Original version	Yang Weiling
A1	2025.07.23	Update logo,laser engraving,company address	Simin Zhong

LED 智能调光驱动器

- 调光接口: 0-10V (1-10V/10V PWM/RX)
- **T-PWM** 数字调光技术, 呈现完美的视觉感受
- 带软启动渐亮功能, 让人眼视觉更舒适
- 可自动识别0-10V、1-10V输入
- DIP开关快速多档电流选择
- 调光范围: 0~100%, LED从0.01%开始调光
- 0-100%全程无频闪, 高频豁免考核级别
- 0-10V 端口超低功耗<0.05mA
- 创新的热管理技术, 智能保护电源寿命
- 过温、过载、短路保护, 可自动恢复
- 适合室内 I、II、III类灯具应用
- 高达50000小时的额定寿命
- 5年质保 (采用红宝石电容)

4合1调光, 调色
0-10V
1-10V
10V PWM
RX

T-PWM
超深度调光技术

无频闪
IEEE 1789
高频豁免考核级别

Dimmable:
1:10000



(认证图标仅代表产品正在进行一系列的认证申请, 认证资质以产品实物为准)

技术参数

型号		SE-12-100-450-W2A		
特征	输出类型	恒流		
	调光类型	0-10V(1-10V/10V PWM/RX)		
	输出特征	隔离		
	防护等级	IP20		
	绝缘等级	II类 (适用于室内 I、II、III类灯具)		
输出	最大输出电压	≤48Vdc		
	输出电压范围	9-42Vdc		
	工作电流	100-450mA		
	负载功率范围	0.9W-12W		
	调光范围	0~100%，调光深度: 0.01%		
	纹波电流	<3%(最大电流不调光状态)		
	电流精度	±5%		
	PWM调光频率	≤3600Hz		
输入	直流电压范围	120-300Vdc		
	交流电压范围	100-240Vac		
	额定电压	115Vac/230Vac		
	频率范围	50/60Hz		
	输入电流	≤0.18A/115Vac(满载) ≤0.08A/230Vac(满载)		
	最大输入功率	Max.16W		
	功率因数	PF>0.95/115Vac(满载) PF>0.9C/230Vac(满载)		
	谐波THD	THD<10%/230Vac (满载)		
	效率(Typ.)	82%(满载)		
	浪涌电流	冷启动15A (在50%Ipeak下测试twidth=102us)@230Vac		
	抗浪涌	L-N: 2KV		
	漏电流	<0.5mA/230Vac		
环境	工作温度	ta: -20°C ~ 50°C tc: 80°C		
	工作湿度	20 ~ 95%RH, 无冷凝		
	储存温度/湿度	-40 ~ 80°C/10~95%RH		
	温度系数	±0.03%/°C(-20°C~50°C)		
	耐振动	10-500HZ, 2G 12分钟/周期; X, Y, Z轴各72分钟		
保护	过载保护	负载超过额定功率≥1.02倍时自动保护,减轻负载自动恢复。		
	过温保护	根据PCB温度超标情况(≥110°C),智能调节电流输出或关闭,后可自动恢复。PCB温度<90°C时,自动恢复正常输出。		
	短路保护	输出线路短路自动关闭,可自动恢复。		
安规和电磁规格	耐压	输入对输出:3750Vac		
	绝缘阻抗	输入对输出:100MΩ/500VDC/25°C/70%RH		
	安全规范	CCC	中国	GB 19510.1,GB 19510.14
		CE	欧盟	EN 61347-1, EN 61347-2-13, EN 62493
		KC	韩国	KC 61347-1,KC 61347-2-13
		TUV	德国	EN 61347-1, EN 61347-2-13, EN 62493
		ENEC	欧洲	EN 61347-1, EN 61347-2-13, EN 62384
		CB	CB成员国	IEC 61347-1, IEC 61347-2-13
		RCM	澳洲	AS/NZS 61347.1, AS 61347.2.13
		BIS	印度	IS 15885(PART 2/SEC 13)
		EAC	俄罗斯	IEC 61347-1, IEC 61347-2-13
	电磁兼容发射	UKCA	英国	BS EN61347-1,BS EN61347-2-13, BS EN62493
		CCC	中国	GB/T 17743, GB 17625.1
		CE	欧盟	EN IEC 55015, EN IEC 61000-3-2, EN 61000-3-3
		KC	韩国	KS C 9815, KS C 9547
		RCM	澳洲	EN IEC 55015, EN IEC 61000-3-2, EN 61000-3-3
		UKCA	英国	BS EN61347-1,BS EN61347-2-13, BS EN62493
		EAC	俄罗斯	IEC 62493, IEC 61547, EH 55015, IEC 61000-3-2, IEC 61000-3-3
		BIS	印度	IS 15885(PART 2/SEC 13)
	电磁兼容抗扰度	EN 61000-4-2,3,4,5,6,8,11, EN 61547		
ErP	功耗	待机功耗	无待机模式	
		网络待机功耗	<0.5W	
		空载功耗	<0.5W	
	频闪/频闪效应	IEEE 1789	满足无影响/高频豁免考核级别	
		CIE SVM	Pst LM≤1.0, SVM≤0.4	
	DF	相位因素	DF≥0.9	
其他	产品重量	80g±10g		
	产品尺寸	110x35x20mm(LxWxH)		

LED电流选择

DIP开关快速选择多档电流值(具体方法见表格)




SE-12-100-450-W2A	DIP开关									
	电流输出	100mA	150mA	200mA	250mA	300mA	350mA	400mA	450mA	
	电压输出	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V	9-30V	9-27V	
	功率输出	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W	3.15-11.9W	3.6-12W	4.05-12.15W	

* 确保驱动断电，再进行DIP开关设置所需电流。驱动重新上电后所需电流生效（注：若驱动不断电设置电流，可能会造成对灯具损坏）


* 假设LED的电压是3V/颗：电源9-42V的输出电压范围可串联3-14颗LED，9-27V的输出电压范围可串联3-9颗LED，最大串联数量以LED实际电压为准。

尺寸图


单位:mm

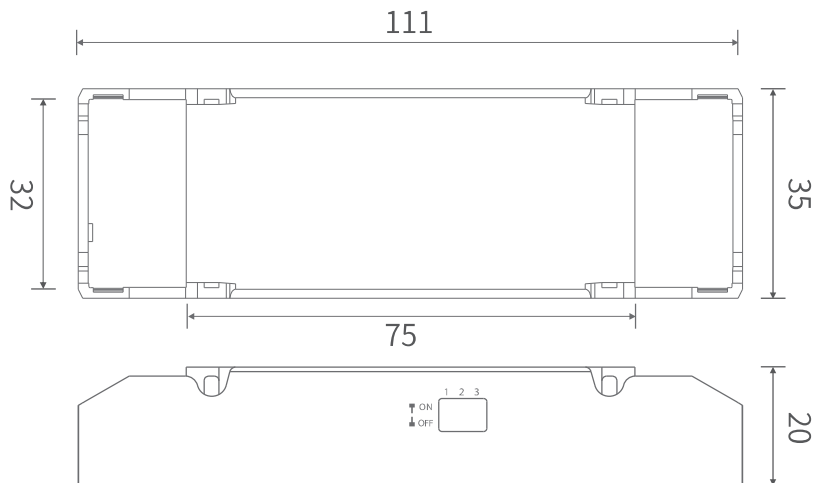



连线图

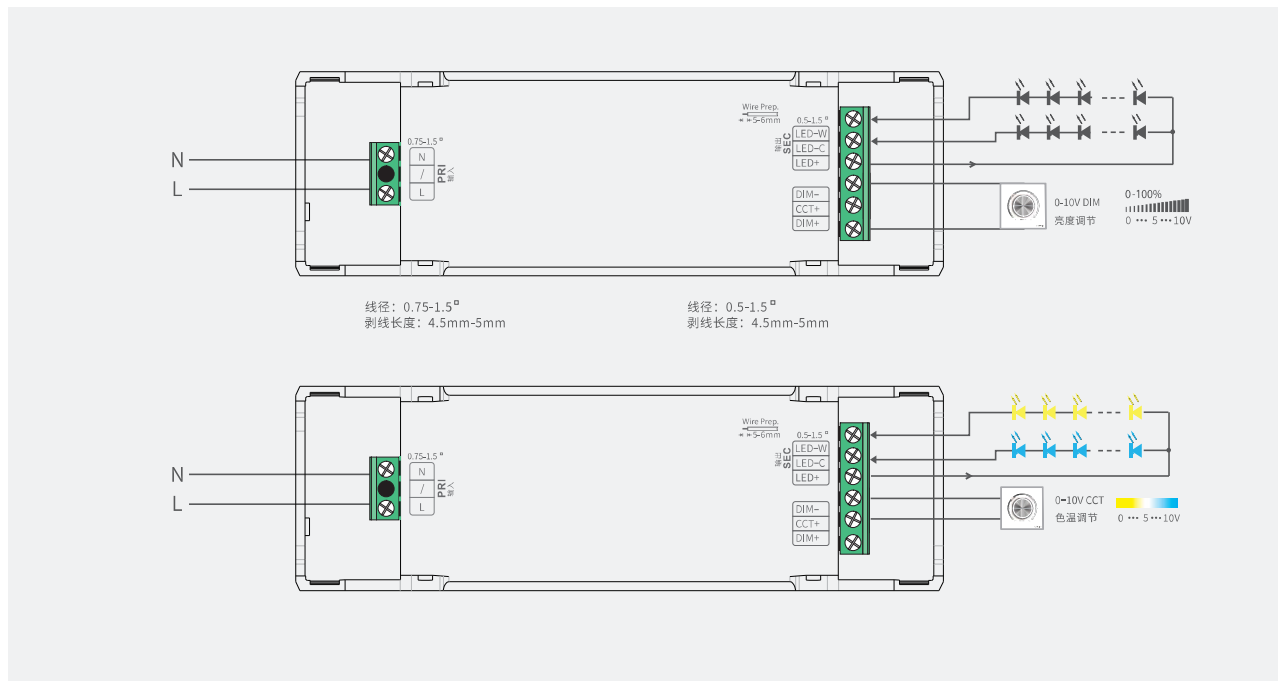


安装注意事项



请勿将产品堆叠摆放，产品与产品间隔距离应 $\geq 15\text{cm}$ ，避免影响产品散热和使用寿命。




请勿将产品置于电源上方，与电源间隔距离应 $\geq 15\text{cm}$ ，避免影响产品散热而减少使用寿命。




关系图表

SE-12-100-450-W2A


效率与负载关系图

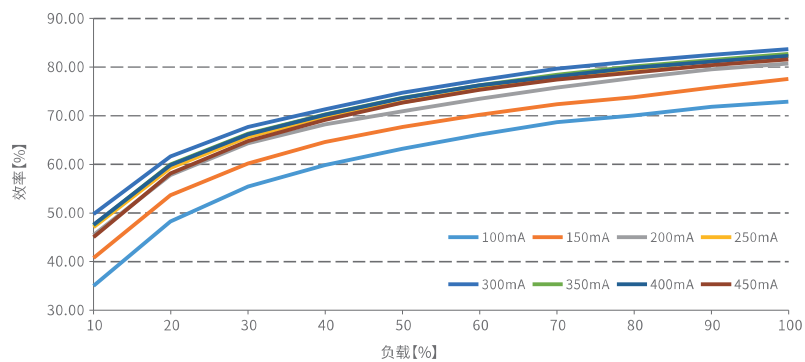


THD与负载关系图

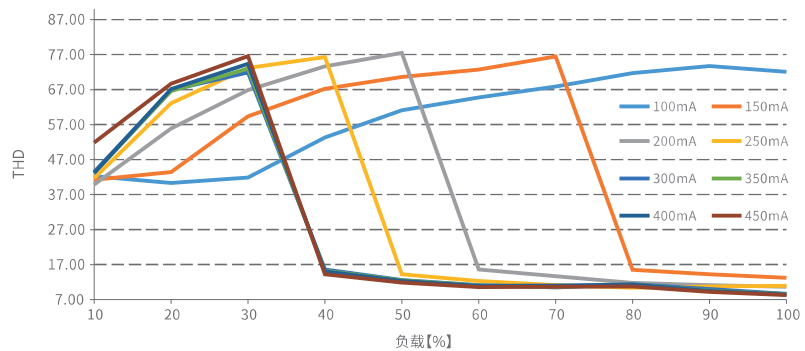

功率因数特征图

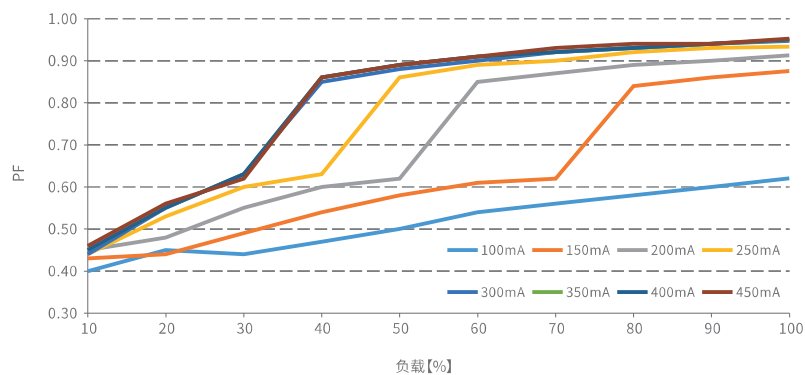

频闪测试表

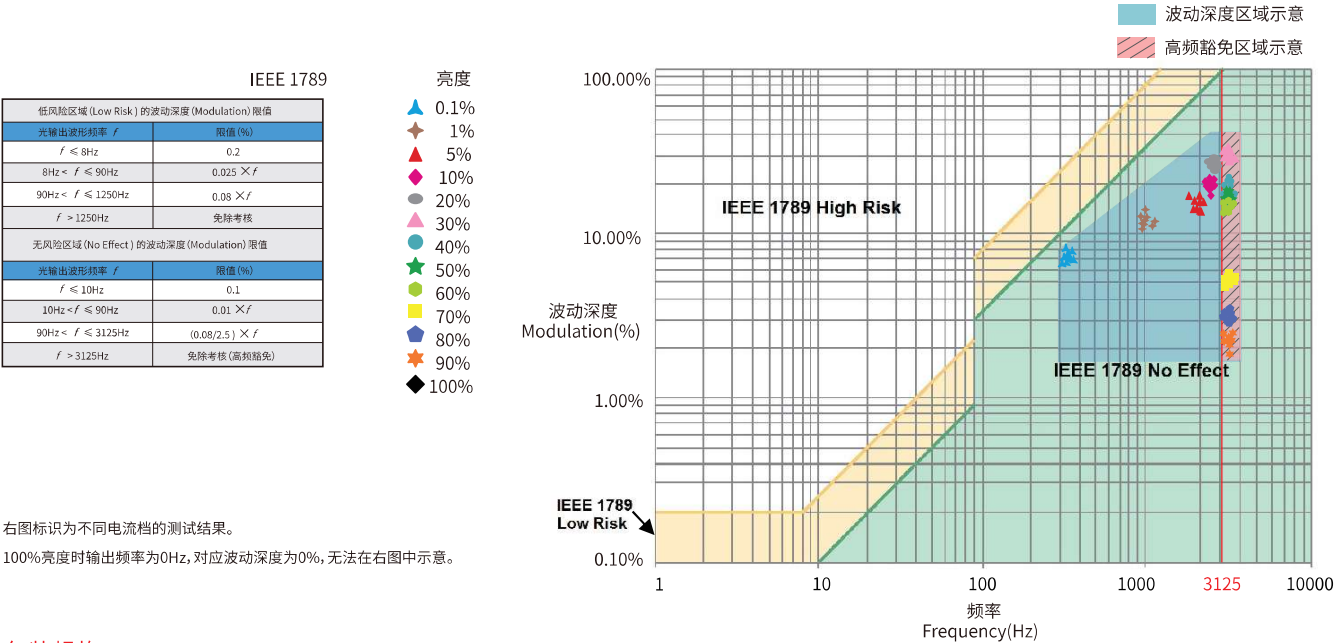

包装规格

型号	SE-12-100-450-W2A
包装箱尺寸	260×235×195mm (L×W×H)
数量	20 PCS/层; 5 层/箱; 100 PCS/箱
重量	0.077 kg/PC; 15.75 kg/箱

包装样式图



内包装盒



整箱包装

运输和贮存

1. 运输

产品适用车、船、飞机交通运输工具运输。

在运输中，应使用遮蓬进行防雨和防晒，并保持文明装卸，不应有剧烈振动、撞击等。

2. 贮存

贮存符合 I 类环境的规定。贮存期限超过6个月的产品建议重新检验，合格后方可使用。

注意事项

- 请由具有专业资格的人员进行调试安装。
- 雷特产品（专有型号除外）不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
- 良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
- 请检查使用的工作电压是否符合产品的参数要求。
- 使用的电线直径大小必须能够负载连接的LED灯具，并确保接线牢固。
- 通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏。
- 如果发生故障，请勿私自维修；如有疑问，请联系供应商。

* 本说明书的内容如有变更，恕不另行通知。若内容与您使用的功能有所不同，则以实物为准。如有疑问，请与供应商联系。

保修条例

- 自出厂之日起保修服务期为5年。
- 在保修服务期内出现产品质量问题雷特科技将给予免费修理或更换服务。

非保修条例：

属下列情况不在免费保修或更换服务范围之内：

- 已经超出保修服务期；
- 过高电压、超负载、操作不当等人为造成的损坏；
- 产品外形严重损坏或变形；
- 自然灾害以及人力不可抗拒原因造成的损坏；
- 产品保修标签和产品唯一条形码损坏；
- 无雷特科技签订的合同或发票凭证。

1. 修理或更换是雷特科技对客户的一补救措施。雷特科技不承担任何附带引起的损害赔偿，除非在适用法律范围之内。
2. 雷特科技享有修正或调整本保修条款的权利，并以书面形式发布为准。

更新日志

版本	更改日期	更改内容	更改人
A0	2022.12.19	正稿	杨魏玲
A1	2025.07.23	更新logo，镭雕，公司地址	钟思敏