


2.4GHz RF Remote

- 12 keys, 4 zones remote control.
- RF 2.4GHz wireless signal.
- Work with F4-3A/F4-5A/F4-CC wireless drivers to control LED fixtures.
- EX series touch panel optional.


FCC CE RoHS

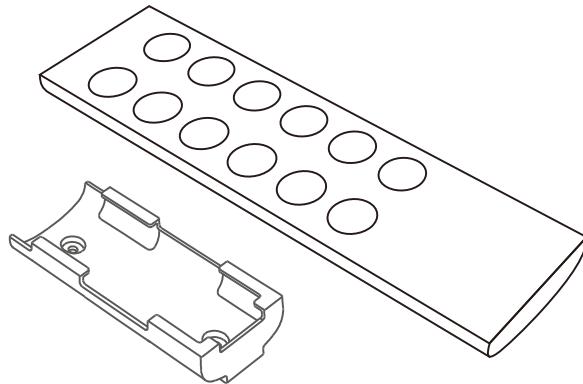


Main Characteristics

Model	F5	F6	F7	F8
Remote Option	Dimming, 4 zones	Color temperature, 4 zones	RGB, 4 zones	RGBW, 4 zones
Working Voltage	3Vdc (Battery CR2032)			
Wireless Frequency	2.4GHz			
Working Temperature	-20°C~55°C			
Dimensions	L145×W40×H12(mm)			
Package Size	L150×W46×H18(mm)			
Weight(G.W.)	85g			


Operating Instruction for Remote

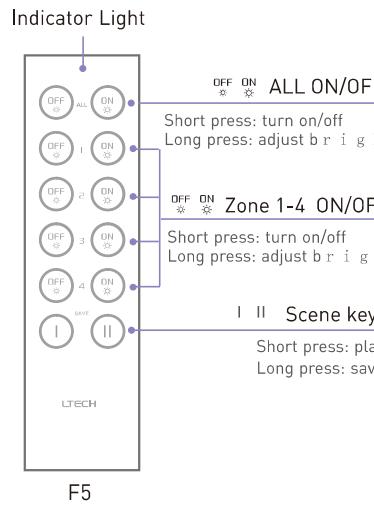


F5

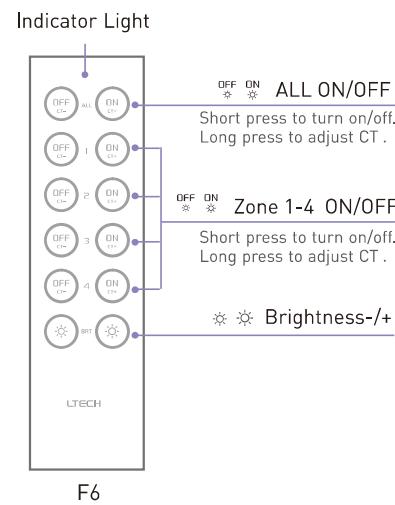

F6

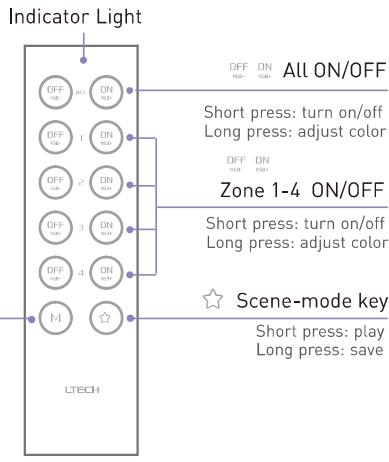


F7

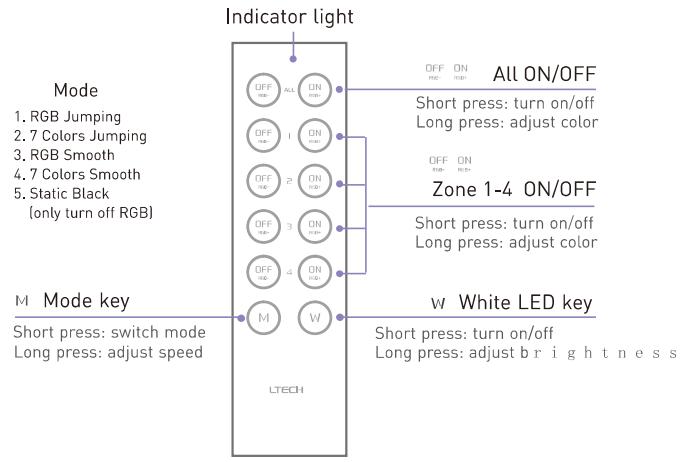


F8

Wiring Diagram

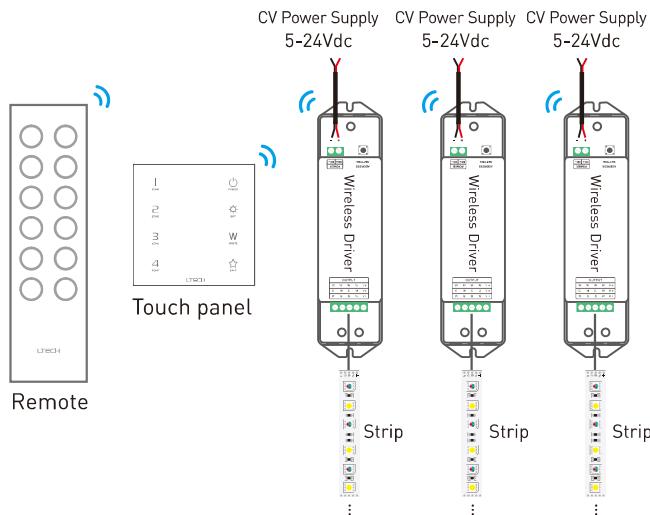

Dimensions

Unit : mm

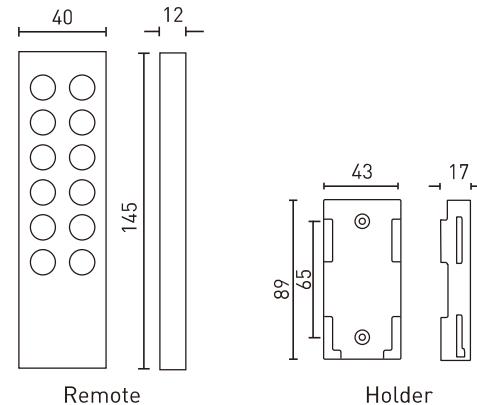


F series remote can control wireless driver directly, please refer to wireless driver manual for match code method.


F series remote can work with EX series touch panel, please refer to touch panel manual for match code method.

Match/Clear code between remotes

1. Assuming that B match up with A. Short press the bottom two keys of B simultaneously, the indicator light keeps on after release.



2. Then press any key on A in 5 seconds. When the indicator light of B turns off, match successfully.



Clear code

Press the bottom two keys of remote simultaneously (about 10 seconds) until the indicator light keeps on, deactivated the matching successfully.

