

The DiGi LED Strip IP68 Multi Color RGB is engineered for high-impact outdoor environments, this robust and flexible lighting solution is designed to perform in the most demanding conditions while providing a seamless experience layer of patterns and motion. A tight bending diameter of 50mm and custom length options allow the light to effortlessly follow organic shapes and intricate architectural outlines.

With high-quality silicone housing and superior protection ratings, it is the ideal choice for enhancing architectural forms with dynamic lighting. The durable construction is saltwater, UV, and flame resistant, offering a reliable, long-term solution that maintains its integrity even in harsh coastal environments.

- Superior Environmental Durability – Rated IP68 and IK08, this strip is fully protected against dust and immersion in water, and physical impact.
- Precise Pixel Control – Featuring 6/10 pixels per meter and 16 bit dimming, you can achieve smooth transitions and complex light shows via DMX or SPI control.



Specifications

General

Power Consumption (W/m)	15
Input Voltage (V DC)	24
LEDs (/m)	70
LED Pitch (mm)	14,29
Pixels (/m)	10
Pixel Pitch (mm)	100
Channels (/m)	30
Beam Angle (°)	120
LED Type	3in1
Color Range	RGB
LEDs (/segment)	7
Control	DMX (UCS512H4L) / SPI (UCS8903)
Dimming	16 bit

Physical

Housing Material	Silicone
Cable Material	Silicone
Connector Material	Nylon (PA66)
Housing Color	White
Connector Type	Bare Wires / M12
Weight (kg/m)	0,14
Dimensions WxHxL (mm)	15 x 7 x 1000

Installation Conditions & Lighting Data

Segment Length (mm)	100
Minimum Bending Diameter (mm)	50
Maximum Run Length Power ¹ (m)	Single Feed 8 Double Feed 16
Maximum Run Length DMX ¹ (m)	@30fps @50fps
Maximum Run Length SPI ¹ (m)	@30fps @50fps
Lumen Maintenance Calculated Hours (h)	L70 @ 25°C 70,000 L70 @ 50°C 50,000

¹More details can be found in the Installation Guide document.

Operating

Environment	Outdoor
Installation Temperature (°C)	0 to +50
Working Temperature (°C)	-40 to +55
Saltwater Resistant	Yes
UV Resistant	Yes
Flame Resistant	Yes
IK Rating	IK08
IP Rating	IP68
Certification	CE, RoHS, UL, UKCA, CB, FCC
Limited Warranty	5 Years

Options

Lighting Specifications

DiGi LED Strip IP68

	Full RGB (lm/m)	Red (lm/m)	Green (lm/m)	Blue (lm/m)
RGB		112	351	61
RGB DMX				


Photometric Distribution

Dimensions


DiGi LED Strip IP68 Multi Color

DiGi LED Strip IP68 Bottom

DiGi LED Strip IP68 Direct

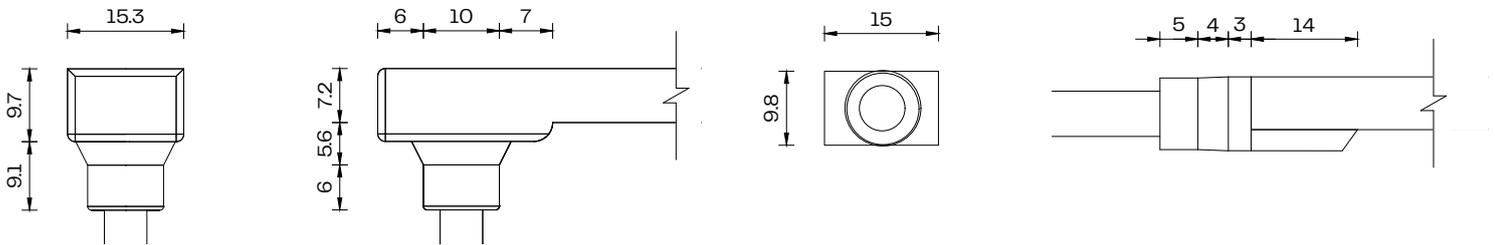

Accessory Options



Mounting Profile¹

Straight Profile


Clip Profile²

Curved Profile

¹ Straight Profile is shown. The dimensions shown are not to scale. Please refer to the Dimensions Sheet document for additional dimensions.

² Straight installation has only 4 pieces per meter, while curved installation has 8 pieces per meter.

Profile Specifications

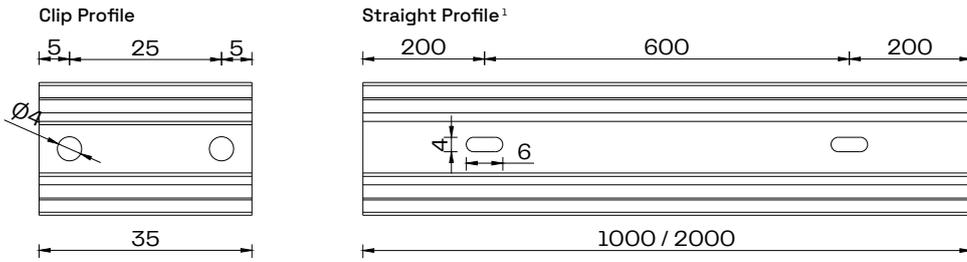


¹1000mm profile is standard. 2000mm is available to order.

Physical


Profile Material	Aluminum Alloy 6063
Aluminum Profile Finish	Blank Anodized

Connection Options


SPI Bare Wires with waterstop¹

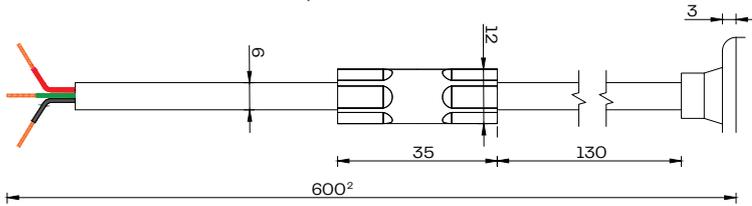


DMX Bare Wires with waterstop¹

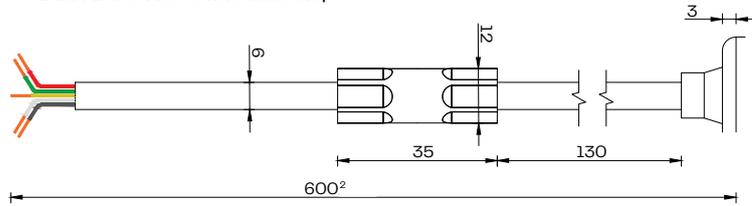


M12 Male Connector³




M12 Female Connector



M12 Male Connector³



M12 Female Connector



¹Removing the waterstop will void the warranty.

²600mm cable length is standard. Custom length is available on request.

³When opting for M12 connector the cable including connector is 300mm.

Wire Color

Red	24 V+
Green	Data
Black	GND

Wire Color

Red	24 V+
Green	Data +
Yellow	Data -
White	Program
Black	GND

Connector Pin

Pin 1	Red	24 V+
Pin 2	Green	Data
Pin 3	Black	GND

Connector Pin

Pin 1	Red	24 V+
Pin 2	Green	Data +
Pin 3	White	Program
Pin 4	Yellow	Data -
Pin 5	Black	GND

Product References

DiGi LED Strip IP68

Reference	Description
3172333	DiGi LED Strip IP68 RGB
3172338	DiGi LED Strip IP68 RGB DMX

Accessories

Reference	Description
3173000	LED Strip IP68 Straight Profile 1000
3173001	LED Strip IP68 Straight Profile 2000