


Node Specifications

1. Node String

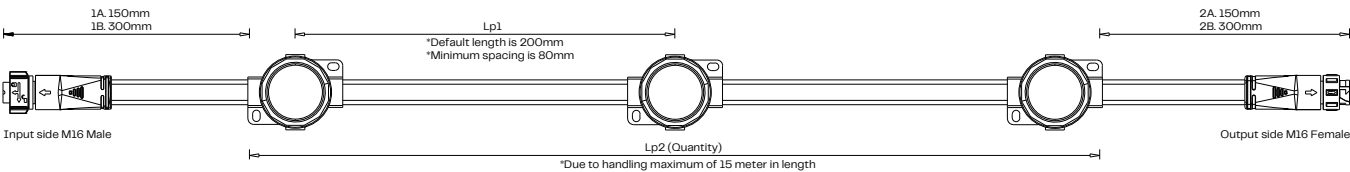

2. Node & Cabling color	3. Color/ CCT	4. Control	5. Connector, Bare wire	6. Node Model	7. Node Cover
A.	A. RGB	A. SPI	A.	A.	A.
B.	B. RGBW2700K	B. DMX	B.	B.	B.
	C. RGBW3000K			C.	C.
	D. RGBW4000K				D.
	E. RGBW5000K				
	F. RGBW6500K				
	G. 2700K				
	H. 3000K				
	I. 4000K				
	J. 5000K				
	K. 6500K				

Node String


Reference	1	2	Lp1 (mm)	Lp2 (Quantity)	Quantity of Node strings
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			
	A B	A B			

Node Specifications


2	3	4	5	6	7
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D
A B	A B	A B	A B	A B C	A B C D

Cabling Specifications


8. M16 3Pin Leader Cable (Short Range)




9. M16 3Pin Jumper Cable (Short Range)




10. M16 3Pin Power Cable (Short Range)



11. M12 3Pin Leader Cable (Long Range)



12. M16 3Pin Power Cable (Long Range)



Accessories

13. Mounting Clip



14. M16 End cap



15. Mounting Profile
*Default length of 2000mm
*Default spacing of 200mm
*Custom on request

16. Panel ring

Cabling

Nr.	Option	Length (m)	Quantity
8	A B C	-	
9	A B C	-	
10	-	-	
11	A B C D	-	
12	-	-	

Accessories

Nr.	Quantity
13	
14	
15	
16	